




# General catalogue





# General catalogue

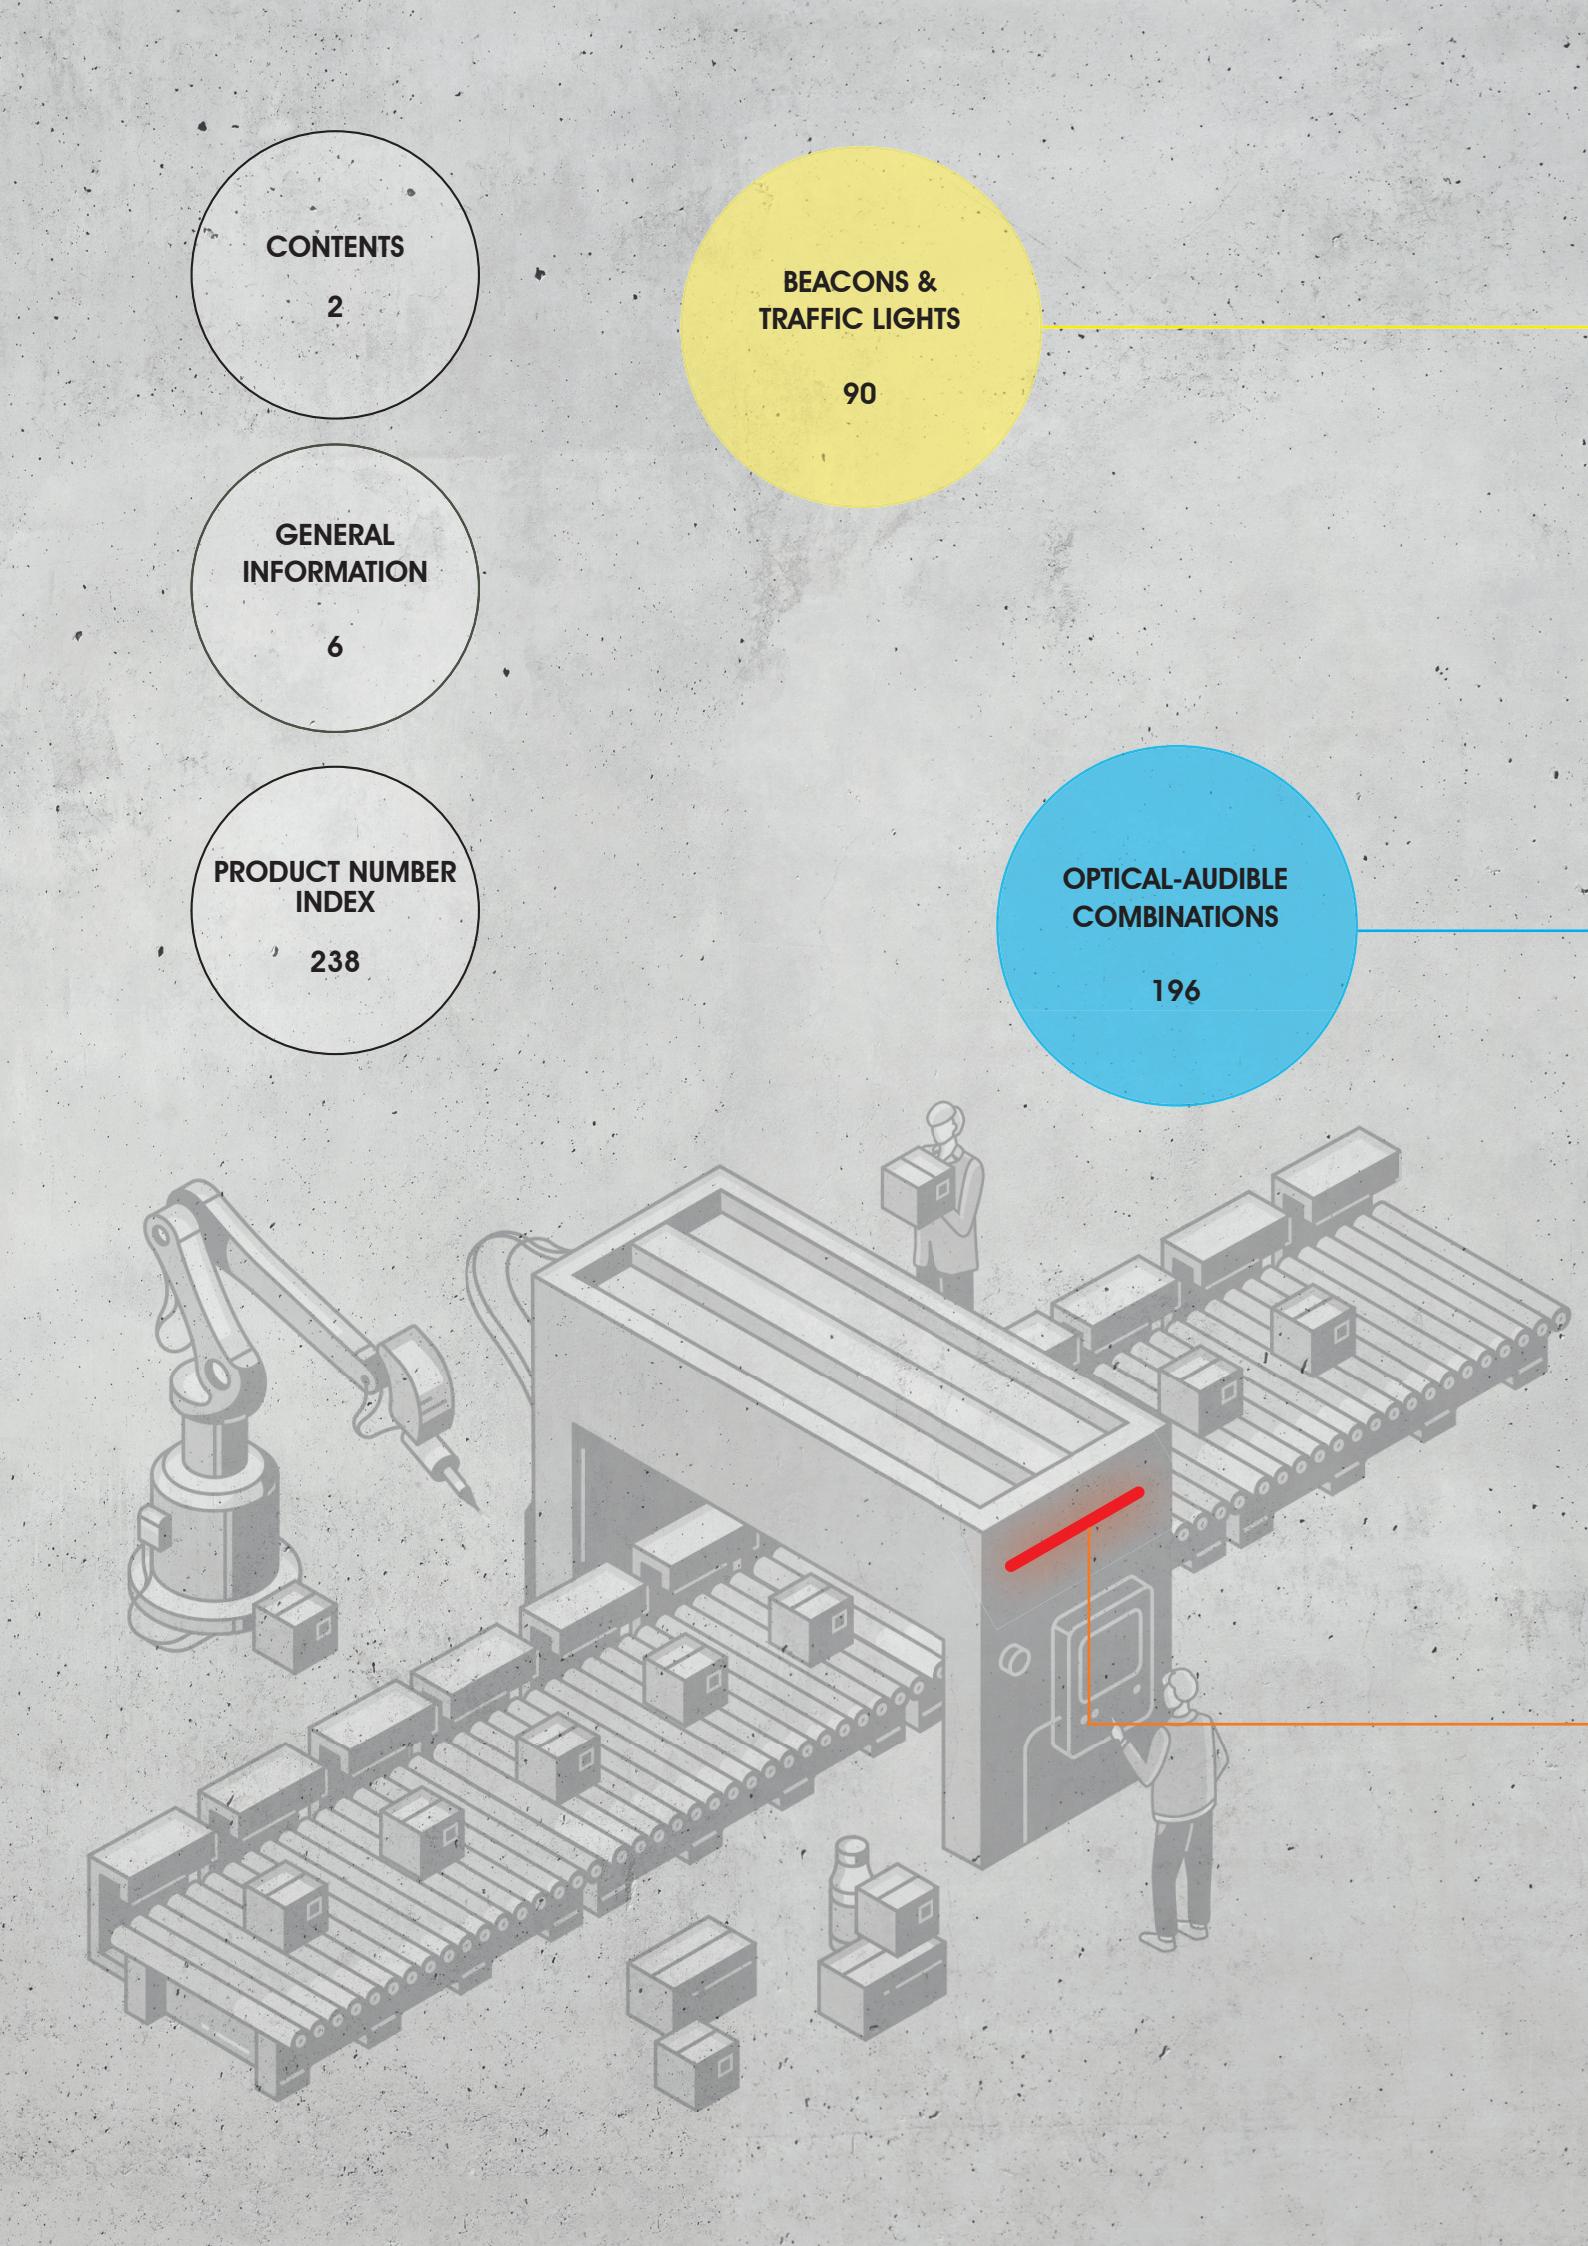

CONTENTS

2

BEACONS &  
TRAFFIC LIGHTS

90

GENERAL  
INFORMATION


6

PRODUCT NUMBER  
INDEX

238

OPTICAL-AUDIBLE  
COMBINATIONS

196

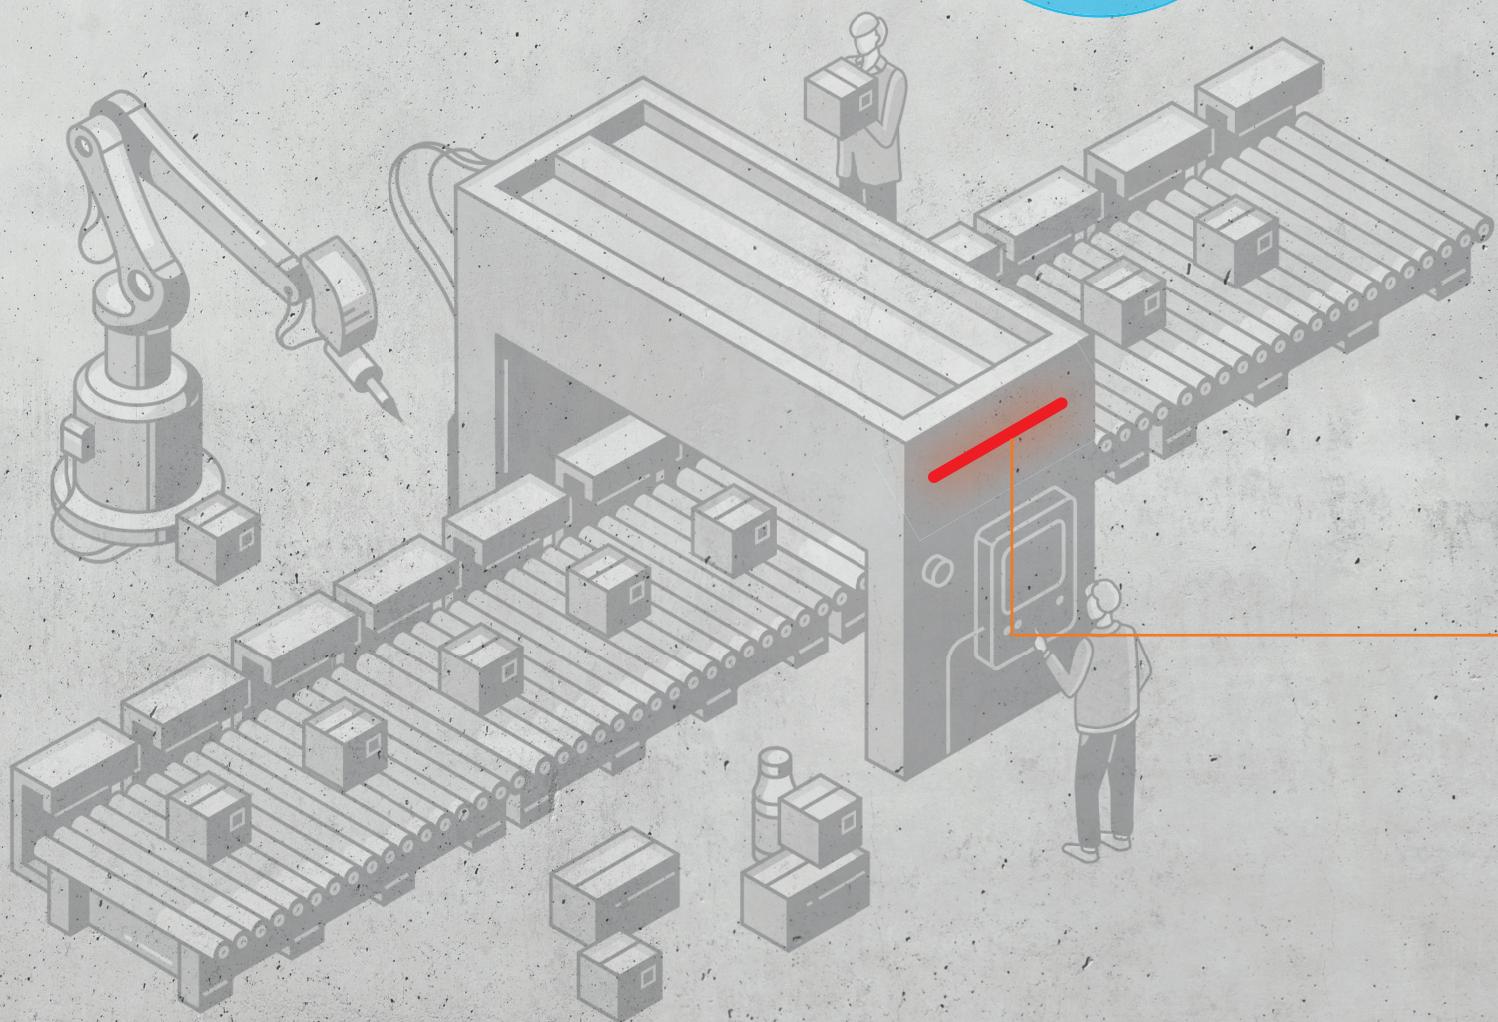



## INTEGRATED SIGNALLING

232

## HORNS & SIRENS

154

## SIGNAL TOWERS

22

## SYSTEMS

240

The **WERMA product range** is completely tailored to the needs and applications of our customers from a range of industries. Compatibility, maintenance and optimisation, with a unique level of quality: This is what we call intelligent signal technology.

## INTELLIGENT SIGNAL TECHNOLOGY

The products and solutions from WERMA make processes safe and keep them running efficiently. This saves you time and money and enables you to optimise your processes sustainably. Customers from various sectors all over the world have benefited from our expertise for years. Basically, because we offer clever solutions that work.




WERMA

EUROPE'S  
LEADER IN  
SIGNALLING



## General Information


### Key to Pictograms "Product Groups"



Product Group  
"Signal Towers"




Product Group  
"Horns and Sirens"



Product Group  
"Beacons and Traffic lights"



Product Group  
"Systems"



Product Group "Optical-audible  
combinations"

### Key to Pictograms "Product Descriptions"




Protection rating according to  
EN 60 529. Explanation page 318




Flash energy in Watt seconds (Joules)



Working temperature in °C,  
highest and lowest rating



Impact resistance in Joules



Volume in decibels (dB (A))  
measured at 1m distance



Suitable for triggering via PLC



Number of possible tones

### Key to Pictograms "Marks of conformity and protection types"



All WERMA products bearing the CE  
mark conform to current EU regulations  
and are tested for adherence to EMC  
codes.



Products in compliance with the AS-  
Interface specifications (EN 50295, IEC  
62026-2) and which have been certified  
by the AS International Association are  
marked with the AS-Interface certification  
logo (shadowed logo).



Products marked with the IO-Link logo  
comply with the IO-Link specifications as  
defined in IEC 61131-9.



This mark confirms that the product is suited to the intended application and conforms to the relevant standards and guidelines. In addition, the technical specifications provided by the manufacturer are certified by the TÜV.



The Eurasian conformity symbol EAC is granted by the customs union Russia/Belorussia/Kazakhstan. The EAC symbol confirms that the product has undergone the conformity procedures and has met its technical requirements.



Products with this mark have been tested and registered by UL for the North American market. This certification is also valid for Canada. The WERMA production facility is audited by UL.

Products with the addendum "Class 2" may only be used in electric circuits that have been constructed in accordance with UL Class 2.



The Fraunhofer Institute certificate for production engineering and automation (IPA) is a test label for products which have been qualified according to recognised standards and guidelines as to their objective suitability for use in clean rooms.



The UKCA mark (UKCA = UK Conformity Assessed) is the new UK product marking required for certain products placed on the market in the UK (England, Wales and Scotland). It affects most products that previously required the CE mark.



German Lloyd sets technical, quality and safety standards for the industrial and maritime sector.

In addition to the classification of ships of all types, German Lloyd is also active as a world-wide technical monitoring society.



The special organisation of the United Nations has given the ICAO (International Civil Aviation Organisation) the task of establishing and developing uniform regulations governing the safety and economic viability of civil aviation processes. The guidelines of the ICAO will only be applicable to all member states but must also be transferred into local statutes of law.

# General Information

## General notes on catalogue descriptions

### Sound levels and frequencies

The specified sound levels are based on tests carried out in our factory. These levels are typical for the specific products and inevitably subject to variation. Mounting position and/or type can alter specifications.

The rated frequencies of buzzers are also dependent on the tolerances of the individual components and can vary up to 500 Hz from the quoted rating. No frequency rating can be stated for horns as the spectrum is so wide that any stated rating cannot be accurate. The fundamental frequency for AC devices is 100 Hz, for DC devices c. 200 - 500 Hz. This means that they emit a deeper tone than piezo devices which have values typically between 2000 and 3000 Hz.

### Current consumption

The current consumption levels quoted are standard values. The ratings are based on the virtual value for AC, i.e. the average value for DC.

The measured value is normally calculated over a period of 10 seconds. The peak current consumption rating can be considerably higher than the calculated rating.

The start-up current of a product can be ten times greater than the rated current.

### Assured values

The technical specifications of our products have been rigorously and thoroughly tested. A quality guarantee according to § 463 BGB is however only applicable where expressly stated.

WERMA is only liable for damage arising from the failure of guaranteed properties when the guarantee was expressly intended to protect the customer from this damage.

Measurements, weights, ratings and illustrations are subject to technical amendment.

## Product descriptions

The product descriptions found in the price list and on all documents are made up of the following information:

Product type:	Fixing:	Tone type:	Voltage:	Colour:
Electronic Buzzer	BM = Base mounting	32 tones	12 V	BK = black
LED Permanent Beacon	BWM = Base/Wall mounting	4 tones	24 V	BU = blue
etc.	EM = Installation mounting	etc.	115 V	CL = clear
	RM = Tube mounting	alternating	230 V	GN = green
	WM = Wall mounting	cont./pulse	etc.	GY = grey
		continuous		RD = red
		pulse		YE = yellow
				WH = white
				MC = multicolour

**Examples:** Electr. Buzzer EM Continuous tone 115 V AC  
LED Permanent Beacon EM 24 V DC RD

**Note:** Colour order of a signal tower from the bottom to the top

## MTTF values

"MTTF" is the abbreviation for **Mean Time To Failure** and is also described as the average life cycle or "**MTTF<sub>d</sub>**" (= the average time until failure leading to a dangerous situation).

The European Norm **EN ISO 13849-1** has caused a new significance to be attached to "MTTF" values, because they are used to evaluate machine safety within the

conformity tests.

The MTTF is a statistical value, which is calculated by **means of testing or experience** of past values. It does not provide a guaranteed life duration or a guaranteed functional period.

MTTF values have been calculated for a variety of **WERMA products**. Please contact us for further details.

## Protection ratings

Protection ratings for signal devices: Protection ratings for housings DIN EN 60529 (DIN VDE 0470 IEC 60529).

First digit: degree of protection against contact with dangerous parts and the intrusion of foreign particles.		Second digit: degree of protection against water..	
IP 0X	no protection	IP X0	no protection
IP 1X	protection against contact with the back of the hand	IP X1	protection against vertically falling water drops
IP 2X	protection against finger contact with live or moving parts in the appliance. The test finger with Ø 12 mm and 80 mm length must not come into contact with dangerous parts. A ball of 12.5 mm diameter should not be able to fully penetrate the housing	IP X2	protection against water drops so long as the device is tilted to an angle of 15°
IP 3X	test bar Ø 2.5 mm may not penetrate the housing	IP X3	protection against water spraying at any angle up to 60° to the vertical
IP 4X	a wire with Ø 1 mm may not penetrate the housing	IP X4	protection against water spraying at any angle
IP 5X	complete protection against dust cannot be guaranteed, but dust is not able to accumulate in such a way as to impair the operation of the device	IP X5	protection against jets of water directed from any angle at the appliance
IP 6X	total protection against dust (no penetration)	IP X6	protection against heavy seas. A strong jet of water may not harm the appliance
		IP X7	protection against occasional immersion
		IP X8	protection against permanent immersion
		IP X9k	protection against water during high pressure / steam cleaning

## Comparison between NEMA and IEC protection ratings - classification

NEMA Protection Type Number	Protection	IEC Protection Classification Designation
1	Falling dirt	IP 10
2	Dripping water and falling dirt	IP 11
3	Wind blown dust, rain and hail; no damage due to external ice formation	IP 54
3 R	Rain and hail; no damage due to external ice formation	IP 14
3 S	Wind blown dust, rain and hail; can be operated even with external ice formation	IP 54
4	Wind blown dust, rain, splashes and a direct jet of water; no damage due to external ice formation	IP 56
4 X	Wind blown dust, rain, splashes and a direct jet of water; no damage due to external ice formation, corrosion protection	
5	Dust, falling dirt, dripping non-corrosive liquids	IP 52
6	Direct jet of water, temporary submersion; no damage due to external ice formation	IP 67
6 P	Direct jet of water, longer periods of submersion; no damage due to external ice formation	
12 und 12 K	Circulating dust, falling dirt, dripping non-corrosive liquids	IP 52
13	Dust, splashes of water, oil, non-corrosive liquids	IP 54

Cannot be used to convert IEC Classification Designations to NEMA Type Numbers.

Note: This comparison is based on tests specified in IEC Publication 60529.

## Interfaces - USB, IO-Link, AS-Interface



	USB	IO-Link	AS-Interface
<b>Technology</b>	Electrically powered: Point-to-point, communication: Bus	Serial point-to-point communication	Fieldbus
<b>Device architecture</b>	Multi-layer star topology	Point-to-point, No bus-based architecture	Bus, star, ring and tree topologies possible
<b>Standards</b>	-	IEC 61131-9	EN 50295, IEC 62026-2
<b>Maximum cable length</b>	3m resp. 5m	20m	100m
<b>Features</b>	Mainly for PC-based applications	Sturdy point-to-point communication without shielded cable	Data transmission and power supply on a common unshielded cable
<b>Products</b>	KombiSIGN 72 KombiSIGN 71 LED Installation Beacon (Multicolour) 816  	eSIGN KombiSIGN 40 KombiSIGN 71 KombiSIGN 72  	KombiSIGN 71 KombiSIGN 72 LED Installation Beacon (Multicolour) 816  
<b>Application examples</b>	<ul style="list-style-type: none"> <li>Self-checkouts</li> <li>PC-controlled testing machines</li> <li>Monitoring of PC-controlled processes in production shops (e.g. printing orders)</li> </ul>	<ul style="list-style-type: none"> <li>Communication with sensor systems (e.g. Access control, filling levels or order/project status)</li> <li>Integration of a signal tower into a production environment consisting of different bus systems</li> </ul>	<ul style="list-style-type: none"> <li>Integration into an existing AS-i environment</li> </ul>

## USB

USB (Universal Serial Bus) is a serial bus system for signal transmission between a computer and external devices. The devices in operation are recognised and displayed by the PC. The relevant device can be used immediately after installing the driver file provided by WERMA. WERMA USB products are compatible with various Windows versions, which are listed in the product manual. Depending on the product, the devices are controlled via VCP (virtual COM port), DLL (dynamic-link library) or exe. file.

## IO-Link

IO-Link is the first standardised interface in control technology that transmits all sensor and actuator device signals to a higher-level controller. IO-Link is often referred to as the "USB interface for industry". This communications network is used to transfer data on switching states, configurations, processes and diagnoses. The special feature of IO-Link is that this technology is used to transmit control data to the lowest field level.

The IODD (IO Device Description) contains information about the device's identity, parameters, process and diagnostic data. The integration and operation of IO-Link devices can start immediately once the IODD has been imported into the user's engineering tool.

## AS-Interface

AS-i (actuator/sensor interface) with its characteristic yellow cable is a modern automation bus system. A "master" organises the communications in the network automatically and exchanges process and diagnostic data with the higher-level control system. The "master" recognises the connected devices and monitors its network automatically. AS-Interface requires no specific software for this purpose. The characteristic transmission medium is an unshielded two-wire yellow cable that is responsible for transmitting both data and power. An IDC connector clamps to the cable to provide mechanical and electrical connections.

# Light in Signalling technology

## The generation of light - a summary of the possibilities

Light can be generated in various ways. In the field of signalling technology LEDs are used in the majority of applications.

### LED



Light emitting diodes are constructed using certain semiconductors. Foreign atoms are built into the semiconductor with the purpose of optimising the conductivity. Half of the semiconductor (n-region) is doped with foreign atoms that contain one bonding electron more than the semiconductor atom. This surplus atom can move freely and increases conductivity.

The other half (p-region) is doped with foreign atoms containing one electron less than the semiconductor. When the LED is switched on, these faults ("holes") fill up with free electrons (recombination). Energy in the form of radiant photons is hereby released. The energy and therefore the colour of the light emitted is determined by the material the semiconductor is made of; e.g. GaAsP (Gallium Arsenic Phosphide) results in red light.



### Electric discharge tubes

Xenon flash tubes are widely used in signalling technology. They consist of a glass tube filled with the inert gas xenon. A sufficiently high voltage leads to a discharge of energy with a spark gap and a flash of high intensity.



### Bulbs / Halogen bulbs

A tungsten filament is heated up to a high temperature, so radiating energy over a wide wavelength. This is perceived as light similar to sunlight. The tungsten filament evaporates with time. When the tungsten content falls below a certain level, the maximum life duration of the bulb is reached. As tungsten oxidises quickly and is destroyed when it comes into contact with air, the filament must be kept in a non-oxidising atmosphere such as vacuum. This leads us to the familiar light bulb with its sealed glass body.

These are bulbs wherein the tungsten filament is enclosed by a small amount of halogen.

The resulting chemical reaction has the effect of lengthening the life of the tungsten and stabilising the light output throughout the entire life duration of the bulb.

# Light in Signalling technology

## Fundamental units of light magnitude

The fields of lighting and signalling technology differentiate between fundamental units to define light itself. The most important of these are the units Lumen, Candela and Lux.

### Lumen (unit lm)

Light current is measured in Lumen; this is the unit for the entire visible light output of a light-emitting source.

The light current is defined by the following formula known as the brightness characteristic:


Light current  $\phi$  [in lm] = radiation capacity x brightness characteristic  $V(\lambda)$

The brightness impression upon the human eye is based on a sensitivity curve  $V(\lambda)$  which reproduces the sensation felt by the eye in relation to the wavelength. The maximum point on this curve is at about 555 nm; we see best at this wavelength;  $V(555 \text{ nm}) = 1$ .

### Candela (unit cd)

In signalling technology only the part of the light current that is emitted in a certain direction is of importance. This light intensity is measured in Candela. It is defined by the light current of a lamp and the steradian measure.


$$\text{Light intensity [in cd]} = \frac{\text{Light current } \phi}{\text{Steradian measure } \Omega}$$



A complete sphere has a dihedral angle of  $\Omega = 4 \pi \text{ sr}$ . sr stands for the steradian and is the unit for the dihedral angle.

Example: a household candle emitting a light intensity of 12,566 Lumen has a light intensity in relation to the steradian measure  $\frac{12,566 \text{ lm}}{4\pi \text{ sr}} \approx 1 \text{ cd}$ .

This explains the name: candela is the Latin word for candle.




### Lux (unit lx)

Illumination density is an important unit in lighting installations. It is the measure of the brightness with which an area is illuminated. Whereas light intensity (in cd) is a property of a light source, illumination density is calculated in regard to the area to be illuminated.

Where the light current emitted is constant, the following formula is applicable:

$$\text{Light density } E \text{ [in lux]} = \frac{\text{Light current } \phi}{\text{Surface } A}$$

# Optical Signal Devices

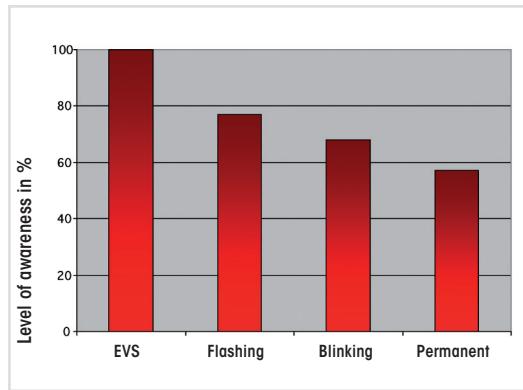

## Permanent light and LED Permanent light

With the assistance of a permanent light or an LED permanent light the operator is made aware of a specific condition or is instructed to carry out a certain course of action.

For safety reasons signal beacons are increasingly equipped with light emitting diodes. The failure of optical signal devices is significantly reduced as a result of the longer life duration of LEDs. Furthermore, LEDs offer a range of advantages compared with conventional light bulbs for example lower current consumption, greater resistance to shock, vibration and other mechanical stress.



## LED Beacons (Multicolour)

As well as offering traditional single coloured beacons, Werma has several multicolour LED products which give the user multiple colour choices in just one beacon.

The 816 LED beacon with USB connection uses RGB LED technology from which you can select up to 200,000 colour variants also in different light effects, such as permanent, blink or special flash.

The LED multicolour beacons 239, 240, 241 and 816 with M12 connectors offer up to 5 or 7 colours and enable you to signal several different status conditions with just one beacon.

## Optical Signal Devices



### (LED) Flashing or Blinking Light and LED EVS Signal Beacon

The deployment of a flashing or blinking signal can generate even more attention than a permanent light. Blinking and flashing beacons nowadays often employ long-life LED technology which has a significantly longer life duration of up to 50,000 hours with a considerably reduced power consumption.

The stochastic, random flickering light EVS (Enhanced Visibility System) has been developed by WERMA on a neurobiological basis. As deployed in LED Beacons, this technology succeeds in generating an optimal attention level never previously reached by existing signal devices.

WERMA employs LEDs for its EVS system. A microprocessor triggers random light signals, which make the light appear extremely "agitated", thus generating a continuously high attention level amongst those in the vicinity - even when viewed out the corner of the eye.



### LED Rotating Signal Beacon and LED Rotating Mirror Beacon

Inside each rotating mirror beacon is an LED light source, and a mirror to deflect the light in one direction. This generates a rotating light beam.

In contrast to conventional Rotating Mirror Beacons, the LED version generates the rotating signal by means of a set of LEDs which are triggered in sequence.

As no mechanical components have been used at all, the beacon is completely maintenance-free.



### Xenon Flashing Light

The deployment of a flashing signal can generate even more attention than a permanent light. The reason for this is to be found in the very short flash duration.

Inside each Xenon flashing beacon there is a capacitor which stores electrical energy. Within the space of a few milliseconds this energy is discharged within the flash tube, generating a very intense light impulse.

The life duration of a flash tube is heavily dependent on the respective load. The average life duration in permanent operation is  $4 \times 10^6$  flashes.



## LED Element „ultrabright“

Excellent visibility, even in direct sunlight, is a basic precondition for the reliable deployment of signal devices in outdoor areas. This is a standard feature of the signal towers and beacons from WERMA Signaltechnik. There are however applications which place even more extreme demands on the visibility of optical signalling.

Thanks to its sophisticated triggering, the innovative LED element "ultrabright" is up to 20 times brighter than conventional LED beacons - making it almost certainly the brightest permanent light that the world of signalling technology currently has to offer.

Furthermore, the intelligent electronics ensure that the LEDs operate at maximum brightness, depending on the ambient and operating temperatures. The "ultrabright" LED element is therefore always working at its optimum, and the energy-saving LED technology ensures that power consumption is kept to a minimum.



## TwinLIGHT / TwinFLASH

TwinLIGHT and TwinFLASH combine two easily selectable light effects in one element

TwinLIGHT: Permanent and Blinking Light

TwinFLASH: Flash and EVS

## OmniVIEW

Clearly visible from all positions thanks to the OmniVIEW lens with no blind spots

## EVS - Enhanced Visibility System



A groundbreaking innovation in LED technology opens up a completely new dimension in optical signalling. Enhanced Visibility System, or the electronic improvement of visibility, EVS for short, is the name WERMA has given to this latest development which promises to bring about a revolution in signal technology.

This technology is generally used when a particularly high level of awareness should be generated.

Irregular light impulses can circumvent the brain's filter function. Random light signals fail to generate an acclimatisation effect and the brain is unable to escape the stimulus, even when the flickering continues for an extended period.

### EVS signal devices communicate highly urgent situations




As a result of the extremely powerful signal effect, the EVS light is especially suited to signalling acute or highly important conditions. The EVS element can also be deployed in hazardous situations or in areas where immediate action is required.

Integrated into KombiSIGN Signal Towers, the EVS LED Element generates a highly attention-grabbing signal.



This innovative technology is also used in EvoSIGNAL and the 853, the optical-audible combinations 444 and 43x.

## EVS - unique light effect using LED technology

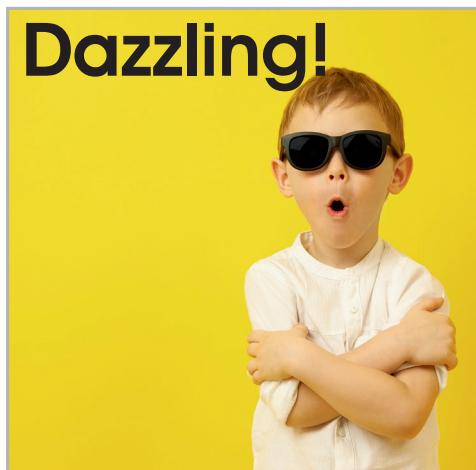

The new EVS LED Element generates a high attention-grabbing signal effect.


For the EVS system WERMA employs light emitting diodes. A microprocessor generates random light signals.

This gives the light a very "agitated" character which proves highly effective in drawing the attention of those in its vicinity - even when seen out of the corner of the eye.

Up to now LED signal devices have confined themselves to imitating the light effects of light bulbs or xenon flashes, EVS however utilises the strengths of light emitting diodes. LEDs are capable of generating the required high flickering frequency with ease - frequencies which xenon flashes are for example incapable of generating.

Further advantages of LEDs are the resistance to vibration, their long life duration as well as their low current consumption.


Typical 2 second section of an EVS LED element's illumination sequence

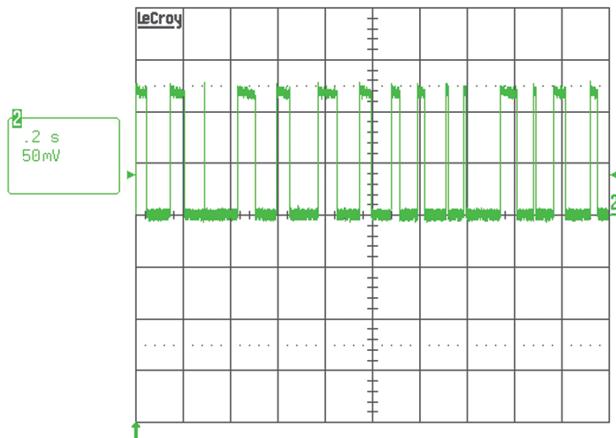

# Acoustics in Signalling technology

## Loudspeakers (electro-dynamic sound generation)

A loudspeaker converts an alternating electric current into sound waves. This occurs by means of the interaction between the electric current and a permanent magnet. The coil is positioned within the magnetic field of the permanent magnet. When an electric current is applied to the coil, the Lorentz force generated leads to a deflection of the coil, causing the membrane to vibrate.

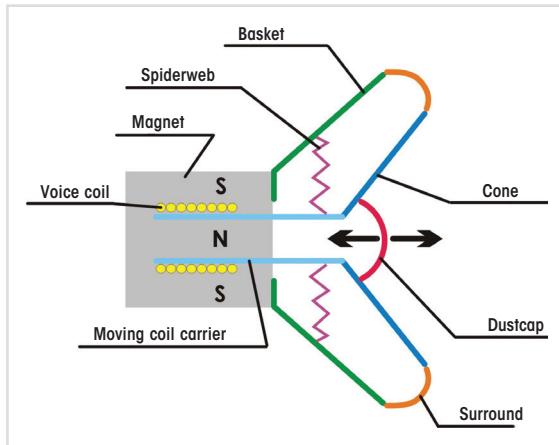

As a result of the centering spider this proceeds in an up and down motion. It centres the coil and, together with the bead, ensures that it returns to the resting position.

With the use of the appropriate size of membrane and material, as well as different drives (coils and permanent magnets), loudspeakers can be optimised for a variety of different frequency ranges.



## Acoustic capsule (electromagnetic sound generation)


The acoustic capsule belongs to the group of electromagnetic sound generators. This principle was previously used for telephone earpieces. Within the capsule a permanent magnet serves to pre-magnetise the armature which is connected to the membrane. This is made to oscillate and these oscillations are then converted into audible tones. The acoustic capsule is characterized by a relatively simple construction and a compact form and displays a high degree of effectivity.



## Piezo disc

Piezoelectricity (also known as the piezoelectric effect, or for short: piezo effect) refers to the interaction of mechanical pressure (Greek piezein = to press) and electrical currents in solid bodies. It describes the phenomenon whereby the deformation of certain materials leads to the generation of an electric charge at the surface (direct piezoelectric effect).

In a reverse process these materials (predominately crystals) deform when a voltage is applied. The deflection is relatively small so they need to be transmitted to a membrane, from where the oscillations excite air molecules which are then perceived as sound.

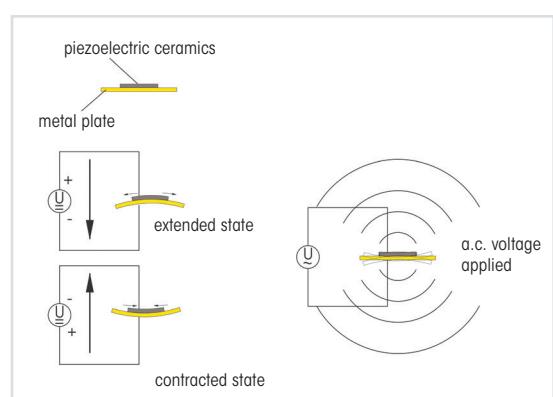

## Principal acoustic parameters

### Sound output level

The sound output level  $L_p$  refers to the logarithmic relationship of the square of the sound output of an acoustic event to the square of the reference value  $p_0 = 20 \mu\text{Pa}$ . The result is given in decibels (abbreviation dB).


$$L_p = 10 \log_{10} \left( \frac{p^2}{p_0^2} \right) \text{ dB} = 20 \log_{10} \left( \frac{p}{p_0} \right) \text{ dB}$$

When indicating an absolute level (with reference to the standardized reference level  $p_0$ ) the abbreviation "SPL" (sound pressure level) is added.

With intermediate to high levels and frequencies a sound output difference of 10 dB is heard as approximately twice as loud. Differences of 3 dB are clearly audible. The perceived sound level is not just dependent on the sound output level, but also on the spectrum of the sound signal and its temporal progression. Single tones are perceived as being considerably louder than a broadband audible signal with the same sound output level. Audible signals with sharply changing levels are also perceived as being significantly louder than uniform audible signals with the same average level.

Weighting curves (A, B and C according to DIN EN 61672-1, formerly IEC/DIN 651) are the curves from weighting filters that are applied to the sound output signal. They are designed to reproduce a similar frequency response as that of the human ear for a specific sound level. However they are only able to achieve a rough approximation, the values obtained for the weighted sound output measurements do not exactly match those of the human ear.

Weighting levels are indicated by the corresponding letter of the frequency weighting, e.g. a C weighting sound output level is given in dB (C). In the field of technical acoustics the A weighting level is predominately employed. For this reason WERMA specifies levels in dB (A).

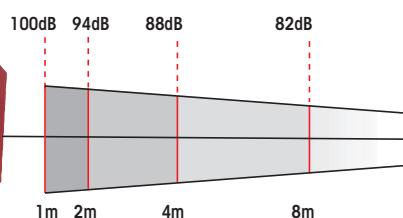

The sound output level is always dependent on the distance from the source of the sound. WERMA specifications are always based on a measuring distance of 1 m, unless otherwise stated.

In the case of point sound sources (generally applies for all sources radiating equally in all directions), the sound output level decreases by 6 dB with each doubling of the distance from the source.

# Acoustics in Signalling technology

## Environmental factors

In addition to the sound output level, the tone frequency and the distance to the signal device, environmental factors are also decisive for the quality of the signal. Wind, humidity or even rain all have an effect on audibility. A very important factor is the ambient noise level.

In industrial environments in particular, the ambient noise level produced by machines is often very high. Accordingly, the signal devices must produce a sufficiently high sound output in order to be heard.

WERMA has developed loud signal horns and sirens for this purpose. With fluctuating ambient noise levels, the use of a siren with a self-adjusting sound level is recommended - a patented invention from WERMA.

## Table of working range

		Distance in m												
		1	2	3	5	10	20	30	50	100	200	300	500	1000
Sound pressure level	dB (A)	120	114	110	106	100	94	90	86	80	74	70	66	60
120		114	110	106	100	94	90	86	80	74	70	66	60	
118		112	108	104	98	92	88	84	78	72	68	64	58	
116		110	106	102	96	90	86	82	76	70	66	62	56	
114		108	104	100	94	88	84	80	74	68	64	60	54	
112		106	102	98	92	86	82	78	72	66	62	58	52	
110		104	100	96	90	84	80	76	70	64	60	56	50	
108		102	98	94	88	82	78	74	68	62	58	54	48	
106		100	96	92	86	80	76	72	66	60	56	52	46	
104		98	94	90	84	78	74	70	64	58	54	50	44	
102		96	92	88	82	76	72	68	62	56	52	48	42	
100		94	90	86	80	74	70	66	60	54	50	46	40	
98		92	88	84	78	72	68	64	58	52	48	44	38	
96		90	86	82	76	70	66	62	56	50	46	42		
94		88	84	80	74	68	64	60	54	48	44	40		
92		86	82	78	72	66	62	58	52	46	42	38		
90		84	80	76	70	64	60	56	50	44	40			
85		79	75	71	65	59	55	51	45	39				
80		74	70	66	60	54	50	46	40					
75		69	65	61	55	49	45	41						
70		64	60	56	50	44	40	36						
65		59	55	51	45	39	35							

The audibility of an audible signal is dependent on a number of different factors:

- the sound output of the signal (in dB)
- the tone frequency (in Hz)
- the distance between signal device and recipient
- the noise level of the surrounding area
- other influences (for example air humidity, wind direction)

## Tone frequency


Sound is a series of fluctuations in the air pressure at different amplitudes occurring at a specific rate per unit of time. This rate is termed frequency and is measured in the unit  $1/s = 1\text{Hz}$  (Hertz). A tone is generated by an oscillation at a certain frequency. The musical tone A for example, has a frequency of 440 Hz. Noise is the term used to describe a number of overlapping tones.


The human ear is only capable of hearing tones within a certain frequency range. In the case of children this range is between 20 and 20,000 Hz. This sensitivity declines

with increasing age: by the age of 50 the limit is approximately 12,000 Hz, and with advanced age this is often as low as 5,000 Hz.

The human ear hears tones of different frequencies at different relative strengths. The limit of audibility and the pain threshold are therefore dependent on the respective frequency. For this reason audible signal devices generally operate at a frequency between 500 and 3,000 Hz.

## Examples of noise in everyday life

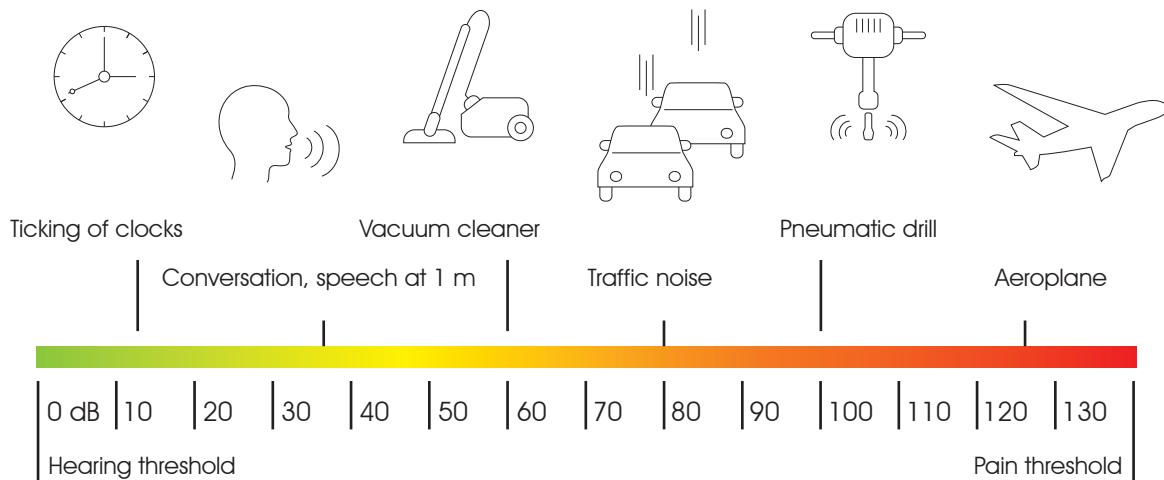



Signal Towers

# Overview Signal Towers

Whether they are used on machinery and equipment, manual workstations or for access control and point-of-sale systems, WERMA signal towers reliably signal different statuses, such as faults or material replenishment requests. Professional signalling provides your application with greater safety and security and considerably reduces response times. The urgency of the signal can be easily increased using different signal effects. This enables employees to immediately react to faults and quickly resolve any problems that arise.

Monitor your processes, make them reliable and keep them running - saving time and money. We call this intelligent signalling technology.



**Overview Signal Towers**

					
<b>Product type</b>		modular	modular	modular	pre-assembled
<b>Technical details</b>	<b>Product range</b>	KombiSIGN 40	KombiSIGN 72	KombiSIGN 71	KOMPAKT 37
<b>Diameter*</b>		40 mm	70 mm	70 mm	37.5 mm
<b>Dimensions*</b>					
Voltage	12 V			●	●
	24 V	●	●	●	●
	115 V			●	
	230 V			●	
Protection rating		IP 66/69k	IP 65	IP 65	IP 65
Number of tiers possible		1-5	1-5	1-5	1-5
Interface		I/O-Link	ASi, USB, I/O-Link, SmartMONITOR, WeASSIST	ASi, USB, I/O-Link, SmartMONITOR, WeASSIST	
Page		Page 26	Page 32	Page 38	Page 58

\* Technical diagrams can be found on the product page



## Modular Signal Towers

Optical and audible signal elements can be combined flexibly in the modular signal towers. The modular design also enables customers to add other elements separately when required. The mechanical and electrical connection of the signal tower elements takes mere seconds thanks to the bayonet fitting.

## Completely pre-assembled Signal Towers

Completely pre-assembled WERMA Signal Towers can be ordered as a compact unit under a single part number, which reduces ordering and installation effort. Impressive features include their stylish design and diverse installation options, allowing them to be used in a wide range of areas.

pre-assembled	pre-assembled	pre-assembled	pre-assembled	pre-assembled	pre-assembled	pre-assembled
eSIGN	RST 56	deSIGN 42	CleanSIGN	FlatSIGN	VarioSIGN	
72,5 mm	57 mm	42 mm	70 mm	-	-	
			112 mm x 125 mm	195 mm x 105 mm	62 mm x 90 mm	
●	●	●	●	●	●	
IP 66/69k	IP 66/69k	IP 65	IP 67/IP 69k	IP 65	IP 65	
6, 9, 15	2-5	2-3	3	3	3	
I/O-Link						
Page 62	Page 68	Page 70	Page 72	Page 74	Page 76	

# KombiSIGN 40 - Modular Signal Tower

## Your benefits

There is no need to compromise with the KombiSIGN 40, because WERMA has combined quick installation, excellent visibility and the highest level of flexibility in this product. This saves time and money with regard to installation and order logistics.

- Save up to 50% on installation time thanks to self-explanatory connections and intuitive mechanics
- Maximum flexibility despite a small number of variants
- TwinLIGHT and TwinFLASH combine two easily selectable light effects in one element
- In ClassicLOOK or DesignLOOK to suit all machine surfaces
- Clearly visible from all positions thanks to the OmniVIEW lens with no blind spots
- Pre-configured standard versions are available (common configurations as a complete tower with a single part number)

## Typical applications

Fault signalling

- on machinery and equipment
- on automated systems
- in assembly plants, for example, in the automotive industry

## Installation options

- Base mounting
- Tube mounting
- Single-hole mounting
- Additional Installation options using accessories

## Features

- Multicolour element offers up to seven colours in a single element
- High IP66/69k protection rating prevents ingress of dust and water
- Compact and high-output 95 dB siren
- Optionally available with IO-Link technology
- IP69k allows high pressure washing



**TwinLIGHT**

**TwinFLASH**

 **IO-Link**



# How to assemble your KombiSIGN 40 signal tower



## ClassicLOOK


► STEP 1  
Select the required optical or audible elements.  
Order numbers can be found on page 29.




► STEP 2  
Select the terminal element and appropriate mounting solution for your application.




► STEP 3  
Optional:  
Where appropriate, select the Extension tube.  
Can be installed between the terminal element and the mounting adapter.

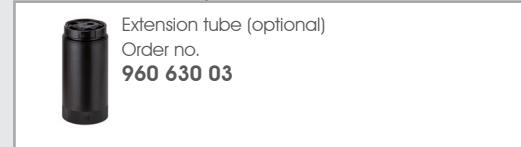

► STEP 4  
Select mounting adapter as required.

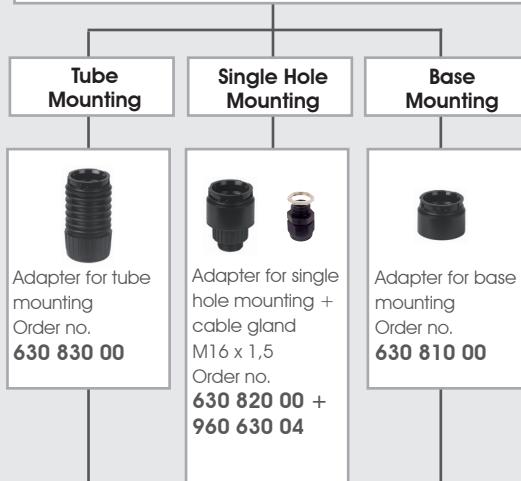

► STEP 5  
Where appropriate, select the bracket.

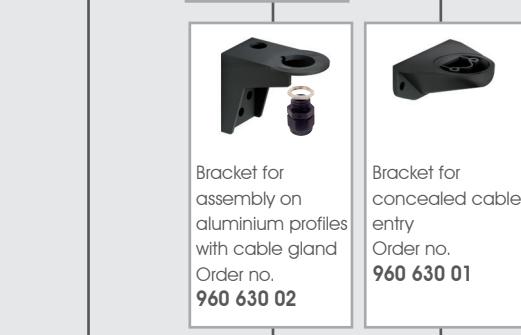

## DesignLOOK

**Audible Signal Element**

- 8 tone siren
- 2 tone siren
- 4 tone siren

**Optical Signal Elements**


- TwinLIGHT
- TwinFLASH
- LED Permanent light element multicolour



Terminal element  
Order no. **630 700 75**

IO Link terminal element  
Order no. **631 400 55**

Extension tube (optional)  
Order no. **960 630 07**

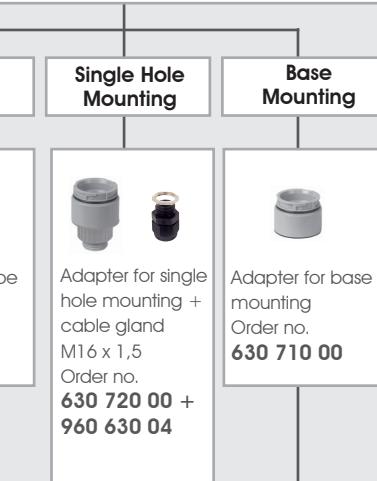

Further accessories can be found in our main catalogue page 74 or at [www.werma.com](http://www.werma.com).

# KombiSIGN 40 - Modular Signal Tower

Or use one of our pre-configured signal towers. With just one part number you can obtain the most popular configurations.



KombiSIGN 40 Signal Tower  
in ClassicLOOK und DesignLOOK

## ⓘ TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Pre-configured signal tower	ClassicLOOK	DesignLOOK
Dimensions (Ø x Height)	40 mm x 214 mm	
Voltage	24 V AC/DC	
TwinLIGHT green/yellow/red	<b>639 300 01</b>	<b>639 301 01</b>

Consisting of





Technical details are given on the relevant product page.

## ⚒ ACCESSORIES

	ClassicLOOK	DesignLOOK
Bracket for concealed cable entry	<b>960 630 01</b>	<b>960 630 05</b>

## ↔ TECHNICAL DIAGRAMS:

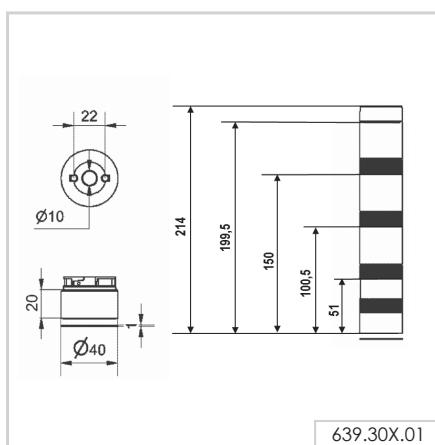

# KombiSIGN 40 - Optical Signal Elements




KombiSIGN 40 Signal Tower  
in ClassicLOOK and DesignLOOK

## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

	ClassicLOOK	DesignLOOK
Dimensions (Ø x Height)	40 mm x 59 mm	
Lens	PC, transparent	
Life duration	50,000 hrs	
<b>TwinLIGHT</b>		
Light effects	LED Permanent or Blinking light, adjustable via slide switch	
Voltage	24 V AC/DC	
Current consumption	< 30 mA	
red	<b>634 110 75</b>	<b>634 130 75</b>
green	<b>634 210 75</b>	<b>634 230 75</b>
yellow	<b>634 310 75</b>	<b>634 330 75</b>
white	<b>634 430 75</b>	<b>634 430 75</b>
blue	<b>634 510 75</b>	<b>634 530 75</b>
<b>TwinFLASH</b>		
Light effect	LED Flash light or EVS, adjustable via DIP-Switch	
Voltage	24 V DC	
Current consumption	< 65 mA	
red	<b>634 120 55</b>	<b>634 140 55</b>
green	<b>634 220 55</b>	<b>634 240 55</b>
yellow	<b>634 320 55</b>	<b>634 340 55</b>
white	<b>634 440 55</b>	<b>634 440 55</b>
blue	<b>634 520 55</b>	<b>634 540 55</b>
<b>Multicolour</b>		
Light effect	LED Permanent light	
Colours	Red, yellow, green, blue, white, violet, turquoise controlled by binary inputs	
Voltage	24 V DC	
Current consumption	< 60 mA	
Order No.	<b>634 450 55</b>	<b>634 450 55</b>

## ↔ TECHNICAL DIAGRAMS:

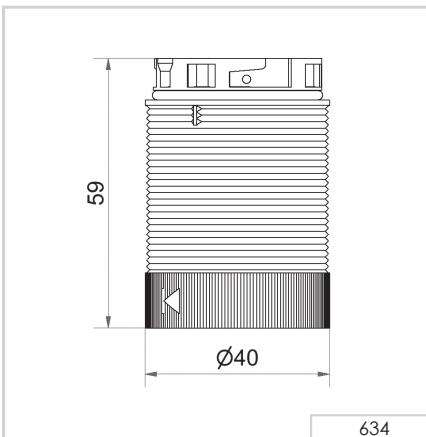

634



Class 2



# KombiSIGN 40 - Audible Signal Elements



4 or 8 tone  
KombiSIGN 40 siren  
in DesignLOOK





2 tone KombiSIGN 40 siren  
in ClassicLOOK

## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

	ClassicLOOK	DesignLOOK
Housing	PC	
Life duration	5,000 hrs	
<b>2 Tone Siren</b>		
Dimensions (Ø x Height)	40 mm x 45 mm	
Sound output	85 dB (A)	
Tone type	Continuous or pulse tone, can be set via slide switch	
Voltage	24 V AC/DC	
Current consumption	< 80 mA	
Order No.	<b>635 800 75</b>	<b>635 700 75</b>
<b>4 Tone Siren</b>		
Dimensions (Ø x Height)	40 mm x 68 mm	
Sound output	67-95 dB (A)	
Tone type	4 tones, can be set via DIP switch	
Voltage	24 V AC/DC	
Current consumption	< 200 mA	
Order No.	<b>635 820 75</b>	<b>635 720 75</b>
<b>8 Tone Siren</b>		
Dimensions (Ø x Height)	40 mm x 68 mm	
Sound output	89-95 dB (A), can be set via DIP switch	
Tone type	8 tones, can be set via slide switch	
Voltage	24 V AC/DC	
Current consumption	< 200 mA	
Order No.	<b>635 810 75</b>	<b>635 710 75</b>

## ↔ TECHNICAL DIAGRAMS:

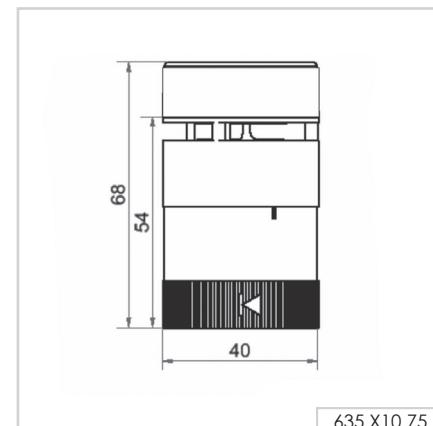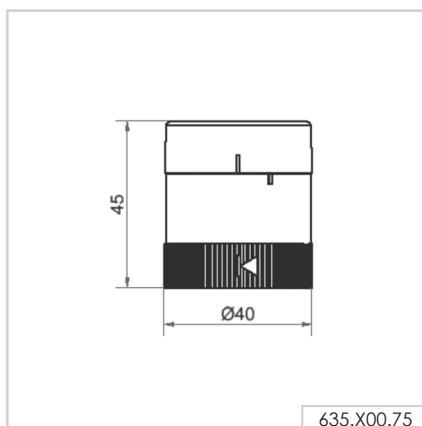

# KombiSIGN 40 - Terminal Elements



KombiSIGN 40 DesignLOOK assembly adapter for single hole mounting



KombiSIGN 40 ClassicLOOK assembly adapter for base mounting



IO-Link terminal element KombiSIGN 40 ClassicLOOK






KombiSIGN 40 DesignLOOK assembly adapter for tube mounting

## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

	ClassicLOOK	DesignLOOK
Housing:	PC	
Number of tiers possible	Max. 5	
<b>Terminal element</b>		
Dimensions (Ø x Height)	40 mm x 40 mm	
Cable entry	Cable diameter max. 9 mm	
Connection	Push-in terminal max. 1.5 mm <sup>2</sup>	
Voltage	24 V AC/DC	
Order No.	<b>630 800 75</b>	<b>630 700 75</b>
<b>IO Link Terminal element</b>		
Dimensions (Ø x Height)	40 mm x 59 mm	
Cable entry	Cable diameter max. 9 mm	
Connection	Push-in terminal max. 0.75 mm <sup>2</sup>	
Voltage	24 V via IO-Link	
Current consumption	10 mA	
Order No.	<b>631 800 55</b>	<b>631 400 55</b>
<b>Adapter for base mounting</b>		
Dimensions (Ø x Height)	40 mm x 30 mm	
Order No.	<b>630 810 00</b>	<b>630 710 00</b>
<b>Adapter single hole mounting</b>		
Dimensions (Ø x Height)	40 mm x 54 mm	
Order No.	<b>630 820 00</b>	<b>630 720 00</b>
<b>Adapter tube mounting</b>		
Dimensions (Ø x Height)	40 mm x 75 mm	
Order No.	<b>630 830 00</b>	<b>630 730 00</b>

## ❖ ACCESSORIES: SEE PAGE 27

## ↔ TECHNICAL DIAGRAMS:

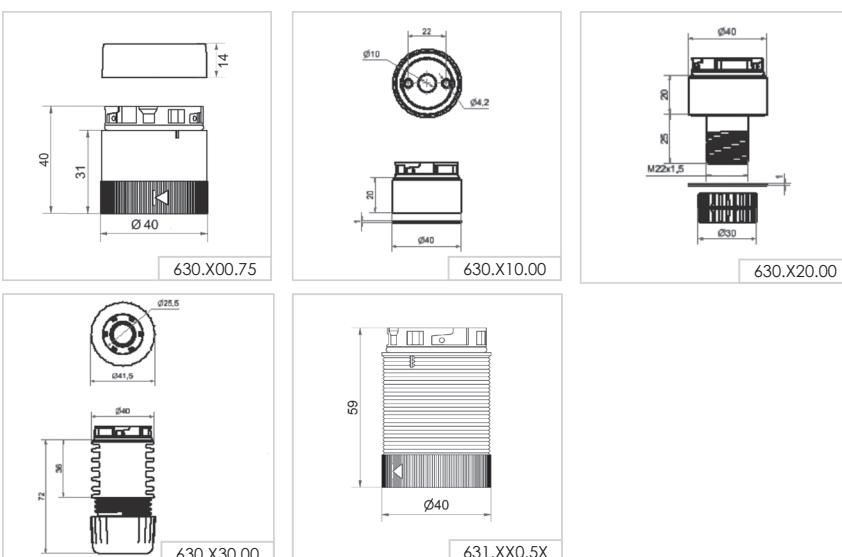



# KombiSIGN 72 - Signal Tower

## Your benefits

There is no need to compromise with the KombiSIGN 72, because this product combines quick installation, excellent visibility and the highest level of flexibility. This saves time and money with regard to installation and order logistics.

- Smooth surfaces prevent dirt gathering and make cleaning easy
- Easy, intuitive installation - incorrect assembly is practically impossible (Poka Yoke)
- High-tech: the Signal Towers can easily be retrofitted with SmartMONITOR (smart MDC alternative), WeASSIST, AndonSPEED (call-for-action system) or AndonWIRELESS
- TwinLIGHT and TwinFLASH combine two easily selectable light effects in one element
- In ClassicLOOK or DesignLOOK to suit all machine surfaces
- Clearly visible from all positions thanks to the OmniVIEW lens with no blind spots
- Pre-configured standard versions are available (common configurations as a complete tower with a single part number)

## Typical applications

The new definition of the industry standard to signal faults

- on machinery and equipment
- on automated systems
- in assembly plants, for example, in the automotive industry
- on conveyor belts in production and logistics
- at manual workstations as a call-for-action system
- upgradeable to SmartMONITOR, WeASSIST, AndonSPEED or AndonWIRELESS

## Installation options

- Base mounting
- Tube mounting
- Additional installation options using accessories

## Features

- Combine the KombiSIGN 72 light elements with special controller solutions such as I/O-Link, USB or ASi, or integrate one of the versatile audible elements
- Can be combined and retrofitted with all the KombiSIGN 71 elements and accessories, as well as the SmartMONITOR, WeASSIST, AndonWIRELESS and AndonSPEED wireless-based systems
- High-output 105 dB siren

Size comparison KombiSIGN 72/40



**TwinLIGHT**

**TwinFLASH**



 **IO-Link**

# How to assemble your KombiSIGN 72 signal tower

## ClassicLOOK

► STEP 1  
Select the required optical or audible elements in the correct voltage (for details see page 35).



### Audible Signal Element

- 2 tone siren
- 8 tone siren

### Optical Signal Elements

- TwinLIGHT
- TwinFLASH

### IO Link terminal element

► STEP 2  
Select the appropriate mounting option for your application.

► STEP 3  
Select the correct terminal element for your mounting option (for details see page 37).

► STEP 4  
Where appropriate, select a base and the desired tube length (only for tube mounting) (For details see page 78).

### Base Mounting



Terminal element with CAGE CLAMP® technology  
Order no. 640 800 00

### Tube Mounting



Terminal element with CAGE CLAMP® technology  
Order no. 640 810 00

## DesignLOOK



### Audible Signal Element

- 2 tone siren
- 8 tone siren

### Optical Signal Elements

- TwinLIGHT
- TwinFLASH

### IO Link terminal element

### Base Mounting



Terminal element with CAGE CLAMP® technology  
Order no. 640 900 00

### Tube Mounting



Terminal element with CAGE CLAMP® technology  
Order no. 640 910 00

### Base Mounting



Terminal element with CAGE CLAMP® technology  
Order no. 640 900 00

### Tube Mounting



Terminal element with CAGE CLAMP® technology  
Order no. 640 910 00

► STEP 5  
Where appropriate, select the bracket and the contact box (for details see page 78).



Bracket for base mounting  
Order no. 960 000 02



Bracket for 1-sided mounting  
Order no. 975 840 85



Bracket for 2-sided mounting  
Order no. 975 840 86



Bracket for base mounting with concealed cable entry  
Order no. 960 000 14



Bracket for tube mounting  
Order no. 960 000 01



Bracket for base mounting  
Order no. 960 000 53



Bracket for 1-sided mounting  
Order no. 960 000 52



Bracket for base mounting with concealed cable entry  
Order no. 960 000 55



Bracket for tube mounting  
Order no. 960 000 54

Look at the signal device section on:  
[www.werma.com](http://www.werma.com)

With the new signal tower configurator you can put together your own individual signal tower.

Further accessories can be found in our main catalogue page 74 or at [www.werma.com](http://www.werma.com).

# KombiSIGN 72 - Modular Signal Tower

Or use one of our pre-configured signal towers. With just one part number you can obtain the most popular configurations.



## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:



Pre-configured signal tower	ClassicLOOK	DesignLOOK
Dimensions (Ø x Height)	70 mm x 211.5 mm	
Voltage	24 V AC/DC	
<b>Base/Bracket mounting</b>		
Consisting of:		
		
	647 110 75	647 130 75
	+ 647 310 75	+ 647 330 75
	+ 647 210 75	+ 647 230 75
	+ 640 800 00	+ 640 900 00
<b>TwinLIGHT green/yellow/red</b>	<b>649 000 01</b>	<b>649 001 01</b>
<b>Tube mounting</b>		
Dimensions (Ø x Height)	70 mm x 299 mm	
Consisting of:		
		
	647 110 75	647 130 75
	+ 647 310 75	+ 647 330 75
	+ 647 210 75	+ 647 230 75
	+ 640 810 00	+ 640 910 00
	+ 975 840 10	+ 960 000 51
<b>TwinLIGHT green/yellow/red</b>	<b>649 000 02</b>	<b>649 001 02</b>

Technical details are given on the relevant product page.

## ❖ ACCESSORIES:

	ClassicLOOK	DesignLOOK
Bracket for 1-sided mounting	<b>975 840 85</b>	<b>960 000 52</b>
Bracket for base mounting	<b>960 000 02</b>	<b>960 000 53</b>
Bracket for tube mounting	<b>960 000 01</b>	<b>960 000 54</b>

## ↔ TECHNICAL DIAGRAMS:

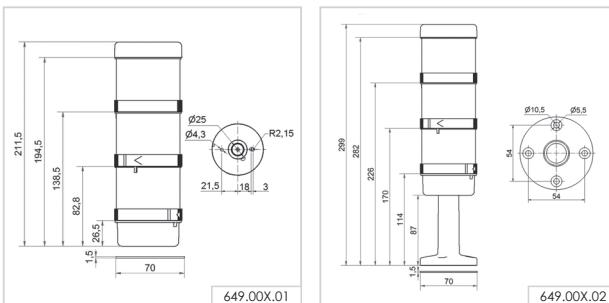


# KombiSIGN 72 - Optical Signal Elements



## ⓘ TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

	ClassicLOOK	DesignLOOK
Dimensions (Ø x Height)	70 mm x 65.5 mm	
Lens	PC, transparent	
<b>TwinLIGHT</b>		
Light effects	LED Permanent light, LED Blinking light, adjustable via slide switch	
Voltage	24 V AC/DC	
Current consumption	< 80 mA	
red	<b>647 110 75</b>	<b>647 130 75</b>
green	<b>647 210 75</b>	<b>647 230 75</b>
yellow	<b>647 310 75</b>	<b>647 330 75</b>
white	<b>647 430 75</b>	<b>647 430 75</b>
blue	<b>647 510 75</b>	<b>647 530 75</b>
<b>TwinFLASH</b>		
Light effect	LED Flashing light, LED EVS light, adjustable via slide switch	
Voltage	24 V DC	
Current consumption	< 80 mA	
red	<b>647 120 55</b>	<b>647 140 55</b>
green	<b>647 220 55</b>	<b>647 240 55</b>
yellow	<b>647 320 55</b>	<b>647 340 55</b>
white	<b>647 440 55</b>	<b>647 440 55</b>
blue	<b>647 520 55</b>	<b>647 540 55</b>

## ↔ TECHNICAL DIAGRAMS:

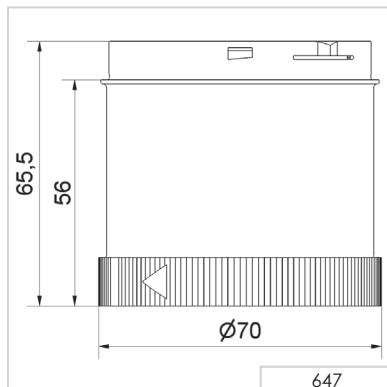

# KombiSIGN 72 - Audible Signal Elements




2 and 8 tone siren  
KombiSIGN 72  
DesignLOOK

## ⓘ TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

	ClassicLOOK	DesignLOOK
Housing	PC	
Life duration	5,000 hrs	
<b>2 Tone Siren</b>		
Dimensions (Ø x Height)	70 mm x 54 mm	
Sound output	95-105 dB (A), adjustable by slide switch	
Tone type	Permanent tone or alternating tone, selectable by slide switch	
Voltage	24 V AC/DC	24 V AC/DC
Current consumption	< 40 mA	< 40 mA
Order no.	<b>645 870 75</b>	<b>645 770 75</b>
<b>8 Tone Siren</b>		
Dimensions (Ø x Height)	70 mm x 54 mm	
Sound output	95-105 dB (A), adjustable by slide switch	
Tone type	8 tones, can be set via slide switch	
Voltage	24 V AC/DC	24 V AC/DC
Current consumption	< 30 mA	< 30 mA
Order no.	<b>645 890 75</b>	<b>645 790 75</b>
Voltage	115-230 V AC	115-230 V AC
Current consumption	< 45 mA	< 45 mA
Order no.	<b>645 890 60</b>	<b>645 790 60</b>

## ↔ TECHNICAL DIAGRAMS:

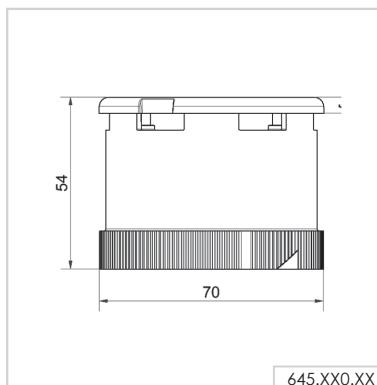

645.XX0.XX



# KombiSIGN 72 - Terminal Elements



Terminal element  
KombiSIGN 72  
DesignLOOK



Terminal element  
KombiSIGN 72  
ClassicLOOK



IO Link element  
KombiSIGN 72  
ClassicLOOK



IO Link element  
KombiSIGN 72  
DesignLOOK

## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:



	ClassicLOOK	DesignLOOK
Dimensions (Ø x Height)	70 mm x 36 mm	
Housing	Terminal element: PA-GF	
Fixing	Cap: PC Base mounting, Tube mounting for tube Ø 25 mm (accessory), Bracket mounting (accessory)	
Cable entry		Cable diameter max. 11 mm
Connection		CAGE CLAMP® technology max. 1.5 mm <sup>2</sup>
Protection rating	IP 65	
Number of tiers possible	Max. 5	
Voltage	12-230 V AC/DC	
Base mounting	<b>640 800 00</b>	<b>640 900 00</b>
Tube mounting	<b>640 810 00</b>	<b>640 910 00</b>
<b>Terminal element M12</b>		
Dimensions (Ø x Height)	70 mm x 59 mm	
Voltage	12-24 V DC	
Current carrying capacity	≤ 2 A	
8 pole (up to 5 tiers)	<b>640 880 00</b>	<b>640 980 00</b>
5 pole (up to 4 tiers)	<b>640 870 00</b>	<b>640 970 00</b>
<b>IO Link element</b>		
Dimensions (Ø x Height)	70 mm x 65.5 mm	
Numbers of tiers possible	Max. 5	
Voltage	24 V via IO-Link	
Current consumption	6 mA	
Order no.	<b>646 840 55</b>	<b>646 440 55</b>

## ❖ ACCESSORIES:

	ClassicLOOK	DesignLOOK
Base with integrated tube	<b>975 840 10</b>	<b>960 000 51</b>
Bracket for 1-sided mounting	<b>975 840 85</b>	<b>960 000 52</b>
Bracket for base mounting	<b>960 000 02</b>	<b>960 000 53</b>
Bracket for tube mounting	<b>960 000 01</b>	<b>960 000 54</b>
Bracket for base mounting with concealed cable entry	<b>960 000 14</b>	<b>960 000 55</b>
Base for tube Ø 25 mm, plastic	<b>975 840 90</b>	<b>960 000 50</b>

Additional accessories can be found on page 74.

## ↔ TECHNICAL DIAGRAMS:

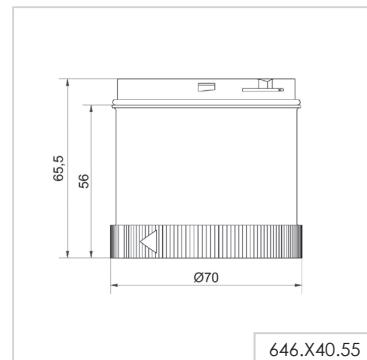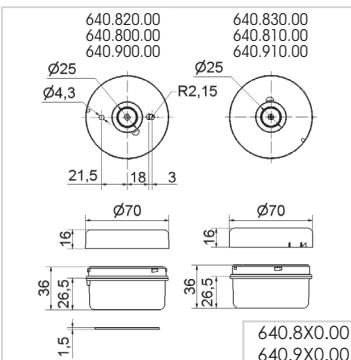

646.440.55  
Class 2





# KombiSIGN 71 - Signal Tower

## Your benefits

The KombiSIGN 71 has successfully established itself as the standard in industrial applications over recent years. The patented bayonet mechanism enables elements to be installed or removed in a matter of seconds.

- A wide range of accessories ensures maximum flexibility
- High-tech: The Signal Towers can easily be retrofitted with SmartMONITOR (intelligent MDC alternative), WeASSIST or AndonSPEED (call-for-action system)
- Completely pre-configured standard versions are available (common configurations as a complete tower with a single part number)

## Typical applications

Signalling fault messages

- on machinery and equipment
- on automated systems
- in assembly plants, for example, in the automotive industry
- in the building services industry

## Installation options

- Base mounting
- Tube mounting
- Additional installation options using accessories

## Features

- Different light effects are possible for individual signalling
- The Multicolour element offers up to seven colours in a single element
- The self-adjusting siren element automatically adapts to the ambient noise level
- Vocal element for your own mp3 or wav files
- Combine the KombiSIGN 71 light elements with special controller solutions such as USB, I/O-Link or ASi, or integrate one of the versatile audible elements



Size comparison KombiSIGN 71/40



# How to assemble your KombiSIGN 71 signal tower

## ► STEP 1

Select the required optical or audible elements in the correct voltage (for details see page 41).



### Audible Signal Elements

- Buzzer element
- Siren element
- Vocal element

### Optical Signal Elements

- (LED) Permanent light
- LED Permanent light ultrabright
- LED Flashing light
- LED EVS element
- LED Blinking light
- LED Rotating light
- LED Permanent light element multicolour

## ► STEP 2

Select the appropriate mounting option for your application.

## ► STEP 3

Select the correct terminal element for your mounting option (for details see page 45).

Base Mounting	Tube Mounting
 Terminal element with CAGE CLAMP® technology Order no. <b>640 800 00</b>	 Terminal element with CAGE CLAMP® technology Order no. <b>640 810 00</b>
 Screw terminal Order no. <b>640 820 00</b>	 Screw terminal Order no. <b>640 830 00</b>
 Terminal element M12 8 pole <b>640 880 00</b> 5 pole <b>640 870 00</b>	 Terminal element M12 8 pole <b>640 880 00</b> 5 pole <b>640 870 00</b>

## ► STEP 4

Where appropriate, select a base and the desired tube length (only for tube mounting) (For details see page 78).

 Tube with clamp Order no. <b>960 000 18</b>	 Adaptor for single hole mounting Order no. <b>960 000 25</b>	 Base with integrated tube Order no. <b>975 840 10</b>	 Tube Ø 25 mm, all anodised 100 mm long Order no. <b>975 845 10</b> 250 mm long Order no. <b>975 840 25</b> 400 mm long Order no. <b>975 840 40</b> 600 mm long Order no. <b>975 840 60</b> 800 mm long Order no. <b>975 840 80</b> 1000 mm long Order no. <b>975 840 03</b>
 Base for Tube, plastic Order no. <b>975 840 90</b>		 Base for Tube, metal Order no. <b>975 840 91</b>	 Foldaway Base Order no. <b>960 000 30</b> Foldaway Base Order no. <b>960 009 12</b> Tube Ø 25 mm, plastic, only for Foldaway Base, 45 mm long Order no. <b>960 000 31</b>

## ► STEP 5

Where appropriate, select the bracket and the contact box (for details see page 78).

 Contact box for cable exit at side Order no. <b>975 840 01</b>	 Contact box for cable exit at side Order no. <b>975 840 01</b>
 Bracket for base mounting Order no. <b>960 000 02</b>	 Contact box with magnetic base and cable exit at side Order no. <b>975 840 04</b>
 Bracket for 1-sided mounting Order no. <b>975 840 85</b>	 Bracket for base mounting with concealed cable entry Order no. <b>960 000 14</b>
 Bracket for 2-sided mounting Order no. <b>975 840 86</b>	 Bracket for tube mounting Order no. <b>960 000 01</b>
 Corner fixing bracket Order no. <b>960 000 41</b>	 Corner fixing bracket Order no. <b>960 000 41</b>

Look at the signal device section on:  
[www.werma.com](http://www.werma.com)

With the signal tower configurator you can put together your own individual signal tower.

# KombiSIGN 71 - Signal Tower

Or use one of our pre-configured signal towers. With just one part number you can obtain the most popular configurations.

## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:


Pre-configured signal tower	<b>2 tier</b>	<b>3 tier</b>
Voltage	24 V AC/DC	24 V AC/DC
<b>Base/Bracket mounting</b>		
Consisting of:		
	 644 100 75 + 644 200 75 + 640 800 00	 644 100 75 + 644 300 75 + 644 200 75 + 640 800 00
Dimensions (Ø x Height)	70 mm x 155 mm	70 mm x 211.5 mm
LED Permanent Light green/yellow/red	-	<b>649 240 02</b>
LED Permanent Light green/red	<b>649 240 04</b>	-
<b>Tube mounting</b>		
Consisting of:		
	 644 100 75 + 644 200 75 + 640 810 00 + 975 840 10	 644 100 75 + 644 300 75 + 644 200 75 + 640 810 00 + 975 840 10
Dimensions (Ø x Height)	70 mm x 242 mm	70 mm x 299 mm
LED Permanent Light green/yellow/red	-	<b>649 240 05</b>
LED Permanent Light green/red	<b>649 240 06</b>	-

Technical details are given on the relevant product page.

## ❖ ACCESSORIES:

Bracket for 1-sided mounting	<b>975 840 85</b>
Bracket for surface mounting	<b>960 000 02</b>
Bracket for base mounting	<b>960 000 01</b>

↔ TECHNICAL DIAGRAMS:

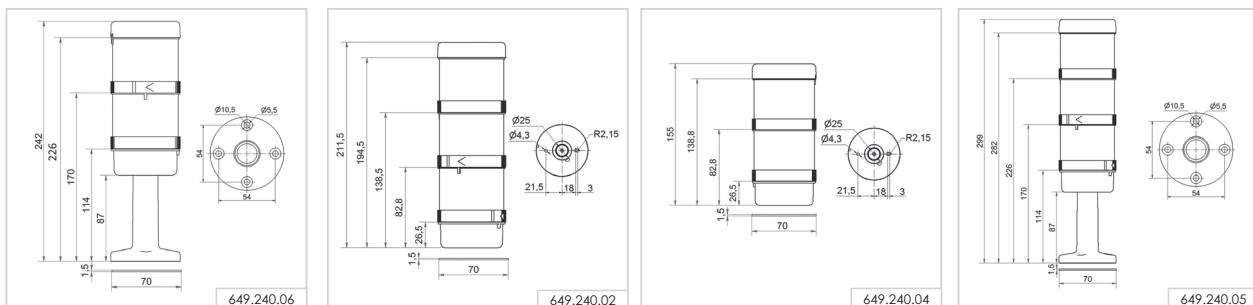

# KombiSIGN 71 - Optical Signal Elements



## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height)	70 mm x 65.5 mm			
Lens	PC, transparent			
Socket	Bayonet, BA15d, for bulbs max. 5 W			
Protection rating	IP 65			
Life duration	50,000 hrs (LED)			
<b>Permanent light element</b>	12-240 V AC/DC			
red	<b>641 100 00</b>			
green	<b>641 200 00</b>			
yellow	<b>641 300 00</b>			
clear	<b>641 400 00</b>			
blue	<b>641 500 00</b>			
Life duration	Dependent upon the bulbs used			
Bulb not included in assembly.				
<b>LED Permanent light element</b>	24 V AC/DC	115 V AC	230 V AC	
Current consumption	< 35 mA	< 25 mA	< 35 mA	
red	<b>644 100 75</b>	<b>644 100 67</b>	<b>644 100 68</b>	
green	<b>644 200 75</b>	<b>644 200 67</b>	<b>644 200 68</b>	
yellow	<b>644 300 75</b>	<b>644 300 67</b>	<b>644 300 68</b>	
clear	<b>644 400 75</b>	<b>644 400 67</b>	<b>644 400 68</b>	
blue	<b>644 500 75</b>	<b>644 500 67</b>	<b>644 500 68</b>	
<b>LED Permanent light element ultrabright</b>	24 V DC			
Current consumption	< 195 mA			
red	<b>644 180 55</b>			
green	<b>644 280 55</b>			
yellow	<b>644 380 55</b>			
clear	<b>644 480 55</b>			
blue	<b>644 580 55</b>			
<b>Flashing light element (Xenon)</b>	24 V DC (ASL)	24 V DC	115 V AC	230 V AC
Current consumption	< 80 mA	< 125 mA	< 22 mA	< 15 mA
red	<b>643 110 55</b>	<b>643 100 55</b>	<b>643 100 67</b>	<b>643 100 68</b>
green	<b>643 210 55</b>	<b>643 200 55</b>	<b>643 200 67</b>	<b>643 200 68</b>
yellow	<b>643 310 55</b>	<b>643 300 55</b>	<b>643 300 67</b>	<b>643 300 68</b>
clear	<b>643 410 55</b>	<b>643 400 55</b>	<b>643 400 67</b>	<b>643 400 68</b>
blue	<b>643 510 55</b>	<b>643 500 55</b>	<b>643 500 67</b>	<b>643 500 68</b>
Life duration	4 x 10 <sup>6</sup> flashes			
Flash frequency	c. 1 Hz			
<b>LED Flashing light element</b>	24 V DC			
Current consumption	< 35 mA			
red	<b>644 120 55</b>			
green	<b>644 220 55</b>			
yellow	<b>644 320 55</b>			
clear	<b>644 420 55</b>			
blue	<b>644 520 55</b>			
Flash frequency	c. 1 Hz (Double Flash)			




# KombiSIGN 71 - Optical Signal Elements



## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

<b>LED EVS element</b>	24 V AC/DC		
Current consumption	350 mA		
red	<b>644 140 55</b>		
green	<b>644 240 55</b>		
yellow	<b>644 340 55</b>		
clear	<b>644 440 55</b>		
blue	<b>644 540 55</b>		
<b>LED Blinking light element</b>	24 V AC/DC	115 V AC	230 V AC
Current consumption	< 25 mA	< 25 mA	< 35 mA
red	<b>644 110 75</b>	<b>644 110 67</b>	<b>644 110 68</b>
green	<b>644 210 75</b>	<b>644 210 67</b>	<b>644 210 68</b>
yellow	<b>644 310 75</b>	<b>644 310 67</b>	<b>644 310 68</b>
clear	<b>644 410 75</b>	<b>644 410 67</b>	<b>644 410 68</b>
blue	<b>644 510 75</b>	<b>644 510 67</b>	<b>644 510 68</b>
Blink frequency	c. 1 Hz		
<b>LED Rotating light element</b>	24 V AC/DC		
Current consumption	< 40 mA		
red	<b>644 130 75</b>		
green	<b>644 230 75</b>		
yellow	<b>644 330 75</b>		
clear	<b>644 430 75</b>		
blue	<b>644 530 75</b>		
Rotation frequency	c. 120 r.p.m.		
<b>LED Permanent light element multicolour</b>	24 V DC		
Current consumption	< 120 mA		
Multicolour	<b>644 450 55</b>		
Possible colours	Red, yellow, green, white, blue, violet, turquoise controlled by binary inputs		
Number of modules possible	Max. 3 (including multicolour element)		
Further voltages on request.			

## ↔ TECHNICAL DIAGRAMS:

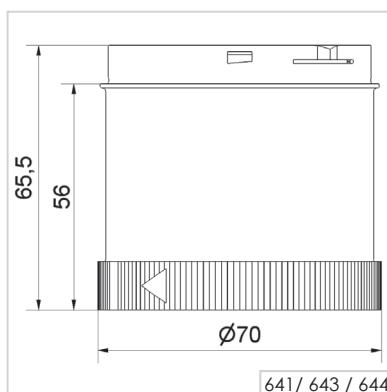

# KombiSIGN 71 - Audible Elements



Buzzer element



Siren element ClassicLOOK



Siren element DesignLOOK

## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height)	See below		
Lens	PC		
Protection rating	IP 65		
Life duration	5,000 hrs		

### Buzzer element

Dimensions (Ø x Height)	70 mm x 72 mm		
Sound output	85 dB (A)		
Number/Tone type	Continuous or pulse tone		
Voltage	24 V AC/DC	115 V AC	230 V AC
Current consumption	< 35 mA	< 25 mA	< 25 mA
Order no.	<b>645 800 75</b>	<b>645 800 77</b>	<b>645 800 68</b>

### Siren element

Dimensions (Ø x Height)	70 mm x 54 mm		
Sound output	95-105 dB (A), adjustable by slide switch		
Number/Tone type	Continuous tone, alternating tone, selectable by slide switch		
Voltage	24 V AC/DC	115 V AC	230 V AC
Current consumption	< 40 mA	< 60 mA	< 60 mA
Order no.	<b>645 870 75</b>	<b>645 870 67</b>	<b>645 870 68</b>



### Siren element 8 tones

Dimensions (Ø x Height)	70 mm x 72 mm		
Sound output	92-102 dB (A), adjustable sound output		
Number/Tone type	8 tones		
ClassicLOOK			
Voltage	24 V AC/DC	115-230 V AC	
Current consumption	< 30 mA	< 45 mA	
Order no.	<b>645 890 75</b>	<b>645 890 60</b>	
DesignLOOK			
Voltage	24 V AC/DC	115-230 V AC	
Current consumption	< 30 mA	< 45 mA	
Order no.	<b>645 790 75</b>	<b>645 790 60</b>	


### Multi-functional Siren, with external control

Dimensions (Ø x Height)	70 mm x 72 mm		
Sound output	100 dB (A), adjustable sound output		
Number/Tone type	Number of tones dependent on the number of optical elements		
Tone triggering	7 diff. tones can be triggered externally		
Voltage	24 V DC		
Current consumption	< 80 mA		
Order no.	<b>645 850 55</b>		

## ↔ TECHNICAL DIAGRAMS:

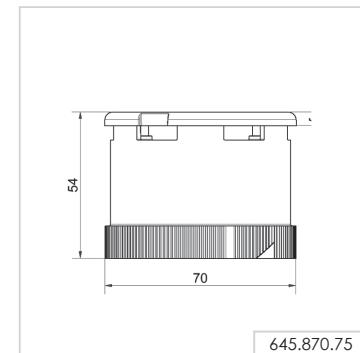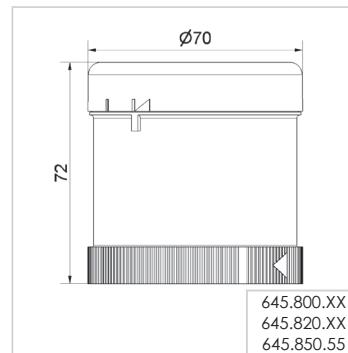

645.870.75  
645.770.75  
645.890.xx  
645.790.xx



# KombiSIGN 71 - Audible Elements





High output vocal element  
with up to 102 dB

## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height)	See below	
Lens	PC	
Protection rating	IP 65	
Life duration	5,000 hrs	
<b>Siren element with self-adjusting sound output</b>		
Dimensions (Ø x Height)	70 mm x 111 mm	
Voltage	24 V DC	
Current consumption	< 150 mA	
Order no.	<b>645 810 55</b>	
Tone type	Pulse tone	
Tone frequency	2.5 kHz	
Sound output	80 dB (A) - max. 100 dB (A)	
<b>Vocal element</b>		
Dimensions (Ø x Height)	70 mm x 111 mm	125 mm x 118 mm
Voltage	24 V DC	24 V DC
Current consumption	< 400 mA	< 400 mA
Order no.	<b>645 840 55</b>	<b>645 860 55</b>
Number of tiers	Max. 4 additional signal elements possible	
Sound output	Adjustable, up to 88 dB (A)	Adjustable, up to 102 dB
File Transfer	Via USB connection and provided software	
Possible data format	Mp3 and wav files	
Number of sequences	15 files can be remotely triggered depending on the number of signal elements used or one sequence with max. 50 files.	
Suitable for	Windows®, System requirements – see Handbook	
Assembly	Vocal element, USB connection cable and software	
Further Information	With UL approval	No UL approval

## ↔ TECHNICAL DIAGRAMS:

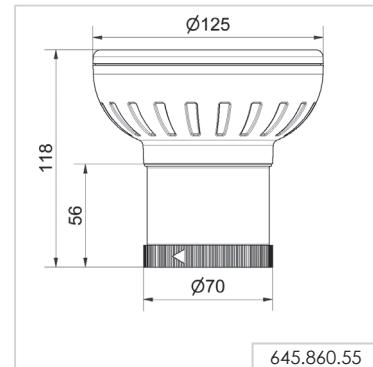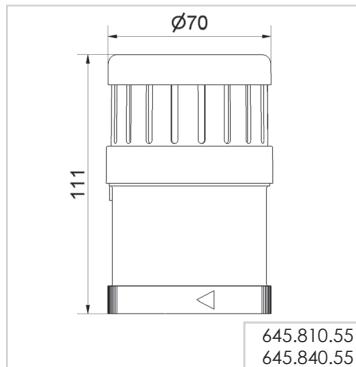

645.810.55  
645.840.55

24 V



# KombiSIGN 71 - Terminal Elements



Screw terminal with cap



Terminal element with practical M12 connection socket in base

## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

	Tube mounting	Base mounting
Dimensions (Ø x Height)	See below	
Housing	Terminal element: PA fibreglass Cap: PC	
Fixing	Base mounting Tube mounting, for tube Ø 25 mm Bracket mounting (accessory)	
Cable entry	Cable diameter max. 11 mm	
Protection rating	IP 65	
Number of modules possible	Max. 5	
Screw terminal	Tube mounting	Base mounting
Dimensions (Ø x Height)	70 mm x 42.5 mm	
Connection	Screw terminal max. 1.5 mm <sup>2</sup>	
Voltage	12-240 V AC/DC	
Order no.	<b>640 830 00</b>	<b>640 820 00</b>
	Incl. cap	Incl. cap and seal
CAGE CLAMP® technology	Tube mounting	Base mounting
Dimensions (Ø x Height)	70 mm x 42.5 mm	
Connection	CAGE CLAMP® technology max. 1.5 mm <sup>2</sup>	
Voltage	12-240 V AC/DC	
Order no.	<b>640 810 00</b>	<b>640 800 00</b>
	Incl. cap	Incl. cap and seal

Terminal element M12	8 pole (up to 5 tiers)	5 pole (up to 4 tiers)
Dimensions (Ø x Height)	70 mm x 59 mm	
Fixing	Tube and Base mounting	
Voltage	12-24 V DC	
Current carrying capacity	≤ 2 A	
Order no.	<b>640 880 00</b>	<b>640 870 00</b>
	Incl. cap and seal	

## ❖ ACCESSORIES:

Base with integrated tube	<b>975 840 10</b>
Base for tube (metal)	<b>975 840 91</b>
Tube Ø 25 mm, Aluminium eloxiert 100 mm long	<b>975 845 10</b>
250 mm long	<b>975 840 25</b>
400 mm long	<b>975 840 40</b>
600 mm long	<b>975 840 60</b>
800 mm long	<b>975 840 80</b>
1000 mm long	<b>975 840 03</b>

Further accessories can be found on page 78.

↔ TECHNICAL DIAGRAMS: next page



# KombiSIGN 71 - USB Terminal Element



Direct triggering of the signal tower elements via USB Interface









## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Terminal element with USB Interface

Dimensions (Ø x Height)	70 mm x 36 mm
Fixing	Tube mounting
Connection	Via USB (Type B)
Voltage	Terminal element: Via USB (5 V DC)
Voltage	24 V DC
Current carrying cap. $\Sigma I_{max}$	90 mA at 24 V
Order no.	<b>640 840 00</b>
Assembly	Assembly includes installation software, drivers, handbook and USB connection cable (length 1.8 m)
Suitable for	Windows®, System requirements – see Handbook

- Direct triggering of signal tower elements via USB Interface
- Simple integration into any customer-specific software
- No additional power supply or hardware necessary
- Up to five signal towers with a maximum of five tiers each can be connected
- Maximum cable length 5m

## ↔ TECHNICAL DIAGRAMS:

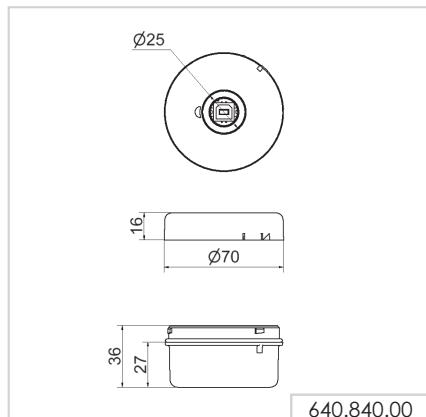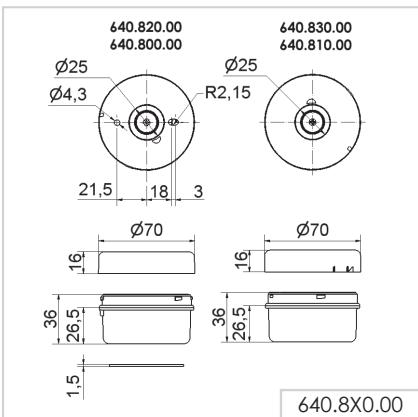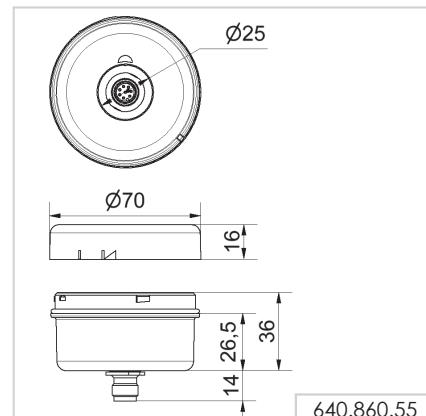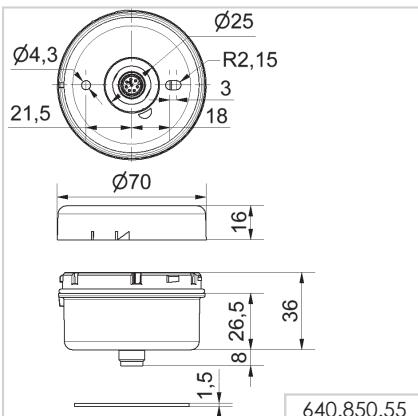

# KombiSIGN 71 - AS-Interface Element



Cable not included in assembly




LEDs display the current status

## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Specif. Power supply AS-Interface Element	Via bus conduction	
Operating voltage	18.5 V ... 31.6 V according to the AS-Interface specification	
Reverse battery protection	Integrated	
Watchdog	Integrated	
	Standard Slave	A/B-Slave
Number of addresses	Max. 31	Max. 62
Number of tiers	Max 4	Max. 3
IO-Code	8 <sub>Hex</sub>	8 <sub>Hex</sub>
ID-Code	F <sub>Hex</sub>	A <sub>Hex</sub>
ID2-Code	N/A	E <sub>Hex</sub>
Outputs	4 semiconductor relays	3 semiconductor relays
Approved in accordance with	Spec. V 3.0	Spec. V 3.0
Order no.	<b>646 830 55</b>	<b>646 810 55</b>
	With internal add. voltage	With external add. voltage
Additional external voltage	24 V DC	24 V DC
Current carrying cap. $\Sigma$ $I_{max}$	200 mA	200 mA per signal
Current consumption max	235 mA	$\leq$ 50 mA
Voltage at signal element	20 V ... 30 V DC	24 V +/- 10%
Short circuit/overload protection	Integrated	Pre-fuse M 1.6 A

## ↔ TECHNICAL DIAGRAMS:

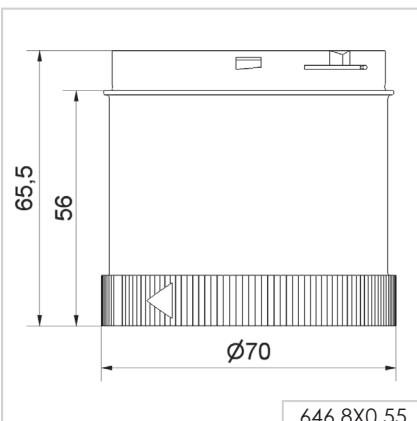


Class 2



Standard Slave



A/B-Slave





# AndonLIGHT

## Your benefits

The introduction to professional call-for-action systems: the easy-to-etrofit Andon products in combination with WERMA KombiS/GN 71 and KombiS/GN 72 signal towers. With these products it is easy to improve safety and efficiency in the workplace.

- Rapid assistance reduces waiting times
- Reduces response times and prevents shutdowns
- Intuitive and self-explanatory light system
- More reliability and efficiency (no running about, calling out, etc.)
- It can be expanded to a networked system at any time

## Typical applications

- Professionally signal problems at workstations
- Manage supply of materials to workstations
- Optimise processes

## Initial startup

- Simply connect AndonLIGHT with mains plug

## Features

- Enables up to eight different statuses to be activated
- Signal directly on the signal tower with AndonCONTROL
- Activate signals on the signal tower with Andon SmartBOX



## This is how you put together your AndonL/GHT system



# AndonLIGHT - Pre-configured Signal Tower



Or select one of our pre-configured variants.

## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Pre-configured signal tower	KombiSIGN 71	KombiSIGN 72
Order No.	649 260 01	649 000 03
Consisting of	 644 100 75 + 644 300 75 + 644 200 75 + 640 810 00 + 975 840 10 + 860 000 09	 647 110 75 + 647 310 75 + 647 210 75 + 640 810 00 + 975 840 10 + 860 000 09

Technical details are given on the relevant product page.

## ↔ TECHNICAL DIAGRAMS:

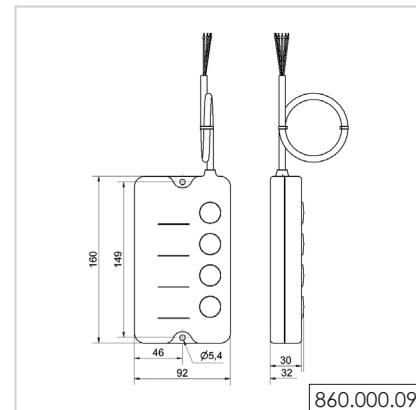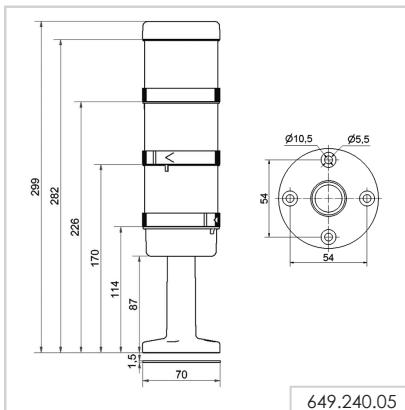

# Andon SmartBOX for Signal Towers




Andon SmartBOX for use in industrial applications

## ⓘ TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (B x H x T)	161 mm x 79 mm x 138 mm
Housing	PA-GF
Fixing	Base mounting, Wall mounting
Connection	Via 5 m cable
Number of signal elements	Max. 4 additional signal elements possible
Assembly	Andon SmartBOX, power supply unit with connection cable (length 1.8 m), Adapter supplied (EU, UK, North America)
Voltage power supply unit	100-240 V AC
Voltage signal elements	24 V DC
Current consumption	Max. 1 A
Order no.	<b>860 000 09</b>

## ↔ TECHNICAL DIAGRAMS:

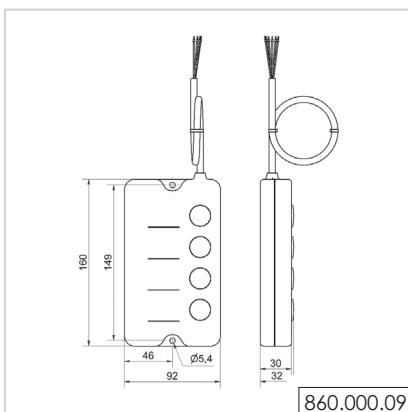

Interchangeable adaptors (included in assembly) and wide input voltage range make the Power Supply suitable for worldwide use



# AndonCONTROL / Connection Set for KombiSIGN 72 and 71



AndonCONTROL is a simple call system for a wide variety of applications



The four push buttons can be individually labelled



With the aid of the connection set, the master/receiver from KombiSIGN reflect can be used wherever an electrical socket is available (see page 55)



## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:


Dimensions (Ø x Height)	136 mm x 55 mm	
Housing	Base: PC/ABS	Terminal element: PA-GF, shock resistant
Fixing	Base mounting, Bracket mounting (accessory)	
Number of signal elements	Max. 4 additional signal elements possible	
Assembly	AndonCONTROL, power supply unit with connection cable (length 1.8 m), interchangeable adaptors for EU, UK, North America, rubber feet, cable connection	Connection Set, power supply unit with connection cable (length 1.8 m), interchangeable adaptors for EU, UK, North America, rubber feet, cable connection
Voltage power supply unit	115-230 V AC	115-230 V AC
Voltage signal elements	24 V DC	24 V DC
Current consumption	Max. 1 A	Max. 1 A
Order no.	<b>860 640 07</b>	<b>860 640 08</b>

## ❖ ACCESSORIES:

Mounting bracket, metal **975 883 01**

## ↔ TECHNICAL DIAGRAMS:

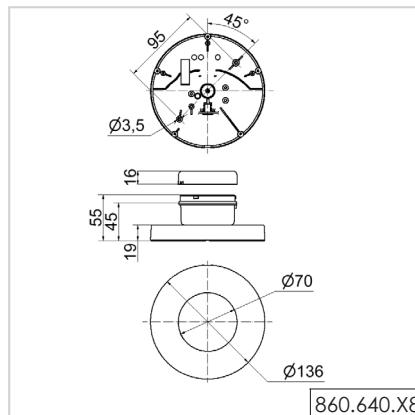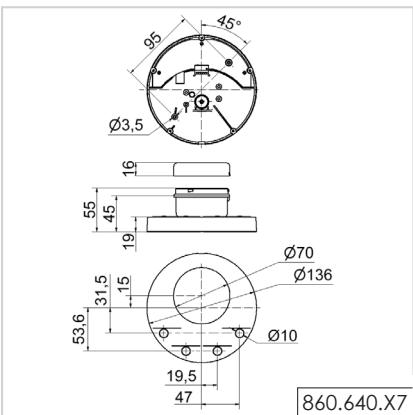

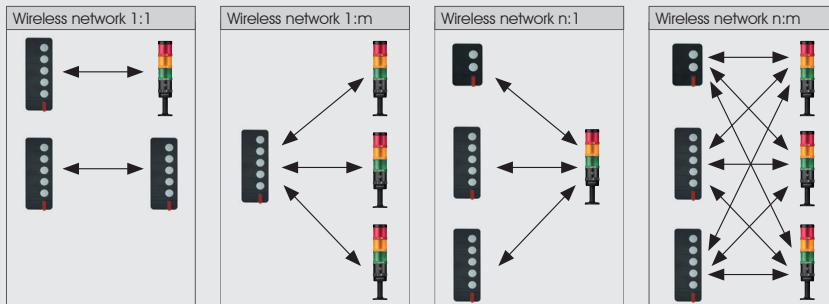

## Your benefits

The WERMA AndonWIRELESS call for action system is the quick and easy way to report, display and rectify problems in a targeted manner. Have you been mainly been solving faults and problems by shouting over to colleagues or walking around to find or provide support? Using AndonWIRELESS, you can now report them professionally at the push of a button. The wireless connection between the buttons and signal towers makes installation easier and faster than ever before, saving you time and money. Every button (Andon WirelessBOX) can be operated using mains power or battery power. This allows you to use it as a stand-alone system for mobile applications, e.g. on forklifts or supply chain vehicles. Make sure your operation is ready for future requirements and flexible for greater efficiency in the workplace.

- Andon WirelessSET with 5-button box (Andon WirelessBOX) and 3-tier signal tower
- Andon WirelessSET with 2-button box (Andon WirelessBOX) and 2-tier signal tower

Configure your individual call for action system easily and conveniently using the Quickfinder.

## Typical applications

- Professional reporting of workstation problems
- Material replenishment control with acknowledgement function
- Optimisation of processes in production and logistics departments
- Access control for doors and gates

## Initial startup

- Configure the button box (Andon WirelessBOX) and receiver (transceiver)
- Power up the button box (Andon WirelessBOX) via the mains plug or battery
- Integrate the receiver (transceiver) into a signal tower without needing any tools

## Features

- Andon WirelessBOX with 2 or 5 buttons
- Signal tower with 2 to 5 tiers
- Configurable button illumination
- Multifunctional acknowledgement function
- Transceiver for wireless signal reception
- Simple configuration software
- Can be combined with control station function: easy to upgrade to SmartMONITOR or AndonSPEED



## How to assemble your individual Andon WirelessSET

 <p>Andon WirelessBOX incl. Power supply Order no. 860 000 16 EU Order no. 860 000 17 US/CA Order no. 860 000 18</p>		 <p>Andon WirelessBOX incl. Power supply Order no. 860 000 18 EU Order no. 860 000 19 US/CA Order no. 860 000 19</p>																													
<p>Optional: Mounting tape Order no. 960 860 04</p>																															
<p>Transceiver EU Order no. 862 000 03 (868 Mhz) US/CA Order no. 862 000 05 (921 Mhz)</p>																															
<p>Signal elements (up to maximum of 5)</p> <table border="1"> <tr> <td></td> <td>Buzzer Order no. 645 800 75</td> <td></td> <td>TwinLIGHT red Order no. 647 110 75</td> </tr> <tr> <td></td> <td>2 tone siren Order no. 645 870 75</td> <td></td> <td>TwinLIGHT yellow Order no. 647 310 75</td> </tr> <tr> <td></td> <td>8 tone siren Order no. 645 890 75</td> <td></td> <td>TwinLIGHT green Order no. 647 210 75</td> </tr> <tr> <td></td> <td>Vocal element Order no. 645 840 55</td> <td></td> <td>TwinLIGHT white Order no. 647 430 75</td> </tr> <tr> <td></td> <td>TwinLIGHT blue Order no. 647 510 75</td> <td></td> <td></td> </tr> </table>			Buzzer Order no. 645 800 75		TwinLIGHT red Order no. 647 110 75		2 tone siren Order no. 645 870 75		TwinLIGHT yellow Order no. 647 310 75		8 tone siren Order no. 645 890 75		TwinLIGHT green Order no. 647 210 75		Vocal element Order no. 645 840 55		TwinLIGHT white Order no. 647 430 75		TwinLIGHT blue Order no. 647 510 75			<p>Pre-configured signal tower</p> <table border="1"> <tr> <td></td> <td>Base mounting</td> <td></td> <td>Tube mounting</td> </tr> <tr> <td></td> <td>TwinLIGHT Order no. 649 000 01</td> <td></td> <td>TwinLIGHT Order no. 649 000 02</td> </tr> </table>			Base mounting		Tube mounting		TwinLIGHT Order no. 649 000 01		TwinLIGHT Order no. 649 000 02
	Buzzer Order no. 645 800 75		TwinLIGHT red Order no. 647 110 75																												
	2 tone siren Order no. 645 870 75		TwinLIGHT yellow Order no. 647 310 75																												
	8 tone siren Order no. 645 890 75		TwinLIGHT green Order no. 647 210 75																												
	Vocal element Order no. 645 840 55		TwinLIGHT white Order no. 647 430 75																												
	TwinLIGHT blue Order no. 647 510 75																														
	Base mounting		Tube mounting																												
	TwinLIGHT Order no. 649 000 01		TwinLIGHT Order no. 649 000 02																												
<p>Base mounting</p> <table border="1"> <tr> <td></td> <td>Connection Set incl. Power supply Order no. 860 640 09</td> <td></td> <td>Terminal element with plug Order no. 640 000 02</td> </tr> </table>			Connection Set incl. Power supply Order no. 860 640 09		Terminal element with plug Order no. 640 000 02	<p>Tube mounting</p> <table border="1"> <tr> <td></td> <td>Bracket for wall mounting Order no. 960 000 02</td> <td></td> <td>Bracket for base mounting Order no. 960 000 14</td> </tr> <tr> <td></td> <td>Bracket for 1-sided mounting Order no. 975 840 85</td> <td></td> <td>Bracket for tube mounting Order no. 960 000 01</td> </tr> <tr> <td></td> <td>Bracket for 2-sided mounting Order no. 975 840 86</td> <td></td> <td></td> </tr> </table>			Bracket for wall mounting Order no. 960 000 02		Bracket for base mounting Order no. 960 000 14		Bracket for 1-sided mounting Order no. 975 840 85		Bracket for tube mounting Order no. 960 000 01		Bracket for 2-sided mounting Order no. 975 840 86														
	Connection Set incl. Power supply Order no. 860 640 09		Terminal element with plug Order no. 640 000 02																												
	Bracket for wall mounting Order no. 960 000 02		Bracket for base mounting Order no. 960 000 14																												
	Bracket for 1-sided mounting Order no. 975 840 85		Bracket for tube mounting Order no. 960 000 01																												
	Bracket for 2-sided mounting Order no. 975 840 86																														
<p>Fixing bracket Order no. 975 883 01</p>				<p>Buzzer Order no. 645 800 75</p> <p>2 tone siren Order no. 645 870 75</p> <p>8 tone siren Order no. 645 890 75</p> <p>Vocal element Order no. 645 840 55</p> <p>TwinLIGHT red Order no. 647 110 75</p> <p>TwinLIGHT yellow Order no. 647 310 75</p> <p>TwinLIGHT green Order no. 647 210 75</p> <p>TwinLIGHT white Order no. 647 430 75</p> <p>TwinLIGHT blue Order no. 647 510 75</p>																											
<p>Tube Ø 25 mm, all anodised 100 mm long Order no. 975 845 10 250 mm long Order no. 975 840 25 400 mm long Order no. 975 840 40 600 mm long Order no. 975 840 60 800 mm long Order no. 975 840 80 1000 mm long Order no. 975 840 03</p> <p>Base for Tube, plastic Order no. 975 840 90</p> <p>Base for Tube, metal Order no. 975 840 91</p> <p>Foldable base Order no. 960 000 30 Order no. 960 009 12</p> <p>Base with integrated tube Order no. 975 840 10</p>				<p>Strain relief for base with integrated tube Order no. 960 649 01</p> <p>Bracket for base mounting Order no. 960 000 14</p> <p>Winkel für tube mounting Order no. 960 000 01</p>																											
<p>Indication board Order no. 960 000 05</p> 																															

\*also available in DesignLOOK.

# KombiSIGN reflect for KombiSIGN 72 and 71



## Your benefits

Do you have a machine or a workstation that is out of your line of sight? KombiSIGN reflect offers a simple solution that "reflects" the machine status to a KombiSIGN signal tower in your vicinity. The two elements are paired and ready for immediate use.

- Keep track of machines or processes that are out of view
- Reduce response times and prevent shutdowns
- Repair faults quickly
- Monitor machines/areas that are not yet networked

## Typical applications

- Report stoppages in complex production areas
- Manage the supply of materials where visibility is restricted
- Improve processes in complex production areas

## Initial startup

- Integrate transmitter and receiver into the signal towers (no tools necessary)

## Features

- Pre-configured for plug & play
- Simple reflection of machine statuses
- Large transmission range thanks to robust wireless network for production environments





## KombiSIGN reflect for KombiSIGN 72 and 71




The slave sends the status directly to the master, and reflects the status of the signal tower installed on the machine

### ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

	Slave	Master
Dimensions (Ø x Height)	70 mm x 66 mm	70 mm x 66 mm (without antenna)
Housing	Polycarbonate, black	
Connection	Bayonet	
Wireless connection	868 MHz (conforms to the EU's EN 300220 harmonised standard and can thus be used in all EU member countries)	
ISM frequency	Further countries upon request	
Transmission range	Up to 300 m (unobstructed line of sight)	
Operating voltage	24 V AC/DC	24 V DC
Current consumption	40 mA	40-900 mA
Order no.	<b>861 640 01</b>	

Please check the wireless frequency. In Europe the version with 868 MHz is used. Please enquire about use in other countries.

### ↔ TECHNICAL DIAGRAMS:

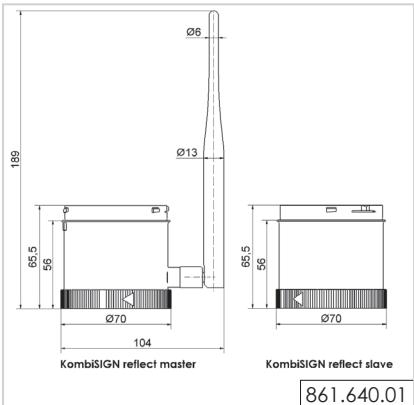

Simple monitoring of signal towers out of view



Simply fit the KombiSIGN reflect slave to the signal tower on the machine

861 X40 02  
receiver: class 2





## KombiSIGN reflect for KombiSIGN 72 and 71




The transmitter sends the status directly to the receiver, and reflects the status of the signal tower installed on the machine

### ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

	Transmitter	Receiver
Dimensions (Ø x Height)	70 mm x 66 mm	70 mm x 66 mm (without antenna)
Housing	Polycarbonate, black	
Connection	Bayonet	
Wireless connection	915 MHz (only for use in North America)	
ISM frequency	Further countries upon request	
Transmission range	Up to 300 m (unobstructed line of sight)	
Operating voltage	24 V AC/DC	24 V DC
Current consumption	40 mA	40-900 mA
Order no.	<b>861 640 02</b>	

In North America the version with 915 MHz is used. Please enquire about use in other countries.

### ↔ TECHNICAL DIAGRAMS:

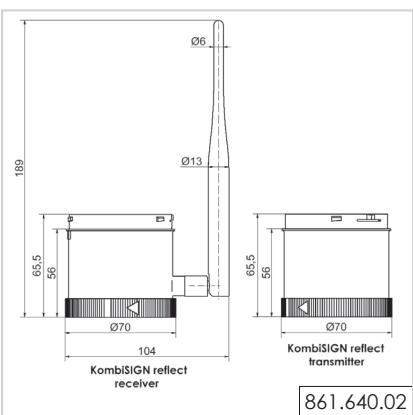

Simple monitoring of signal towers out of view



Simply fit the KombiSIGN reflect transmitter to the signal tower on the machine

861 X40 02  
receiver: class 2





# KOMPAKT 37 - pre-assembled Signal Tower

## Your benefits

The KOMPAKT 37 is a completely pre-assembled signal tower that can be easily ordered under a single part number. With 1-5 visual tiers, the slim signal tower can be installed quickly and easily. The compact and completely enclosed construction is ideal for use in all types of public areas because it is tamper-proof.

- Up to six levels of signal escalation possible – including an audible signal
- In ClassicLOOK or DesignLOOK to suit all machine surfaces
- Clearly visible from all positions thanks to the OmniVIEW lens with no blind spots

## Typical applications

Fault signalling

- on smaller machines and equipment
- on point-of-sale and access control systems

## Installation options

- Single-hole mounting
- Additional installation options using accessories

## Features

- Pre-assembled with easy cable connection or M12 plug for plug & play use



# How to select your KOMPAKT 37 signal tower

## ► STEP 1

Select the signal tower of your choice with or without buzzer, with the appropriate connection, housing colour, voltage and number of tiers.

Part numbers can be found on page 60.





- 12 or 24 V
- 1-5 tiers
- With or without buzzer
- M12 plug or cable
- Black or silver finish




## ► STEP 2

Select up to two extension tubes.

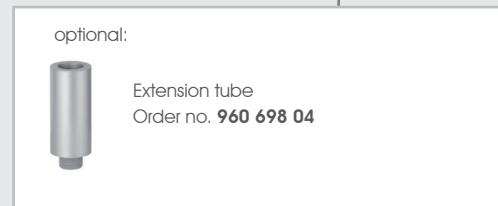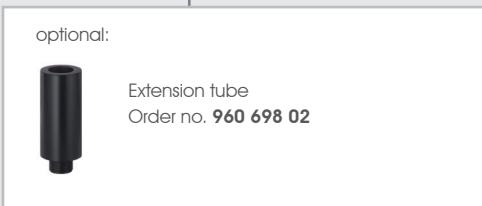

## ► STEP 3

Select the appropriate fixing accessories for your application, using for example a tube and base or a bracket mount.

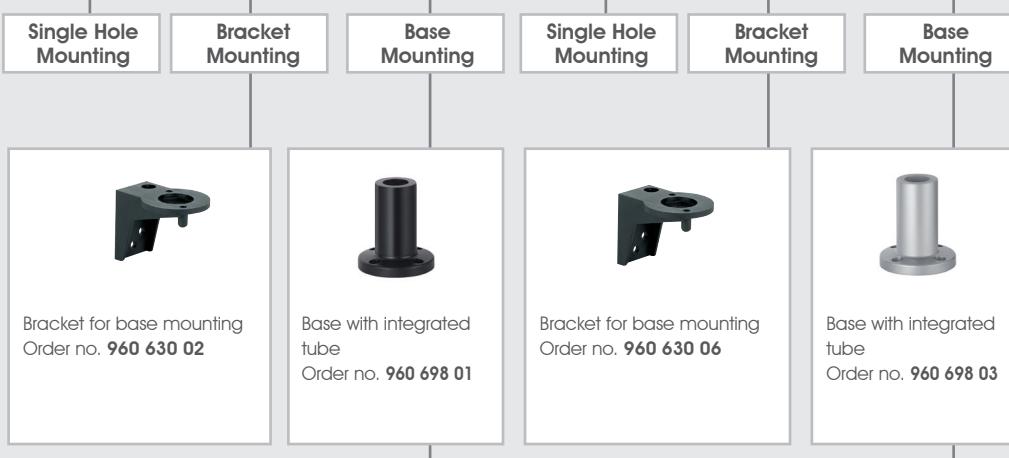

## ► STEP 4

Where appropriate, select the bracket and the contact box.




Go to the signal devices page on: [www.werma.com](http://www.werma.com)

Here you can use the selection tool „Configurator“ to select the Kompakt 37 signal tower according to your requirements.

With the help of intuitive questions and pictures you will be able to make your choice with just a few mouse clicks.

# KOMPAKT 37 - pre-assembled Signal Tower



## ClassicLOOK



Two tier Kompakt 37 with integral tube and base (accessory)



Three tier Kompakt 37 with bracket (accessory)

### ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimension (Ø x Height)	1 tier: 37.5 mm x 93.5 mm 2 tier: 37.5 mm x 127.5 mm 3 tier: 37.5 mm x 161.5 mm 4 tier: 37.5 mm x 195.5 mm 5 tier: 37.5 mm x 229.5 mm (Protrusion from panel)		
Housing	PC		
Fixing	Single hole mounting for Ø 22.5 mm (M22 x 1.5 mm) Base or bracket mounting (accessory)		
Connection	Cable connection: Cable, 2 m long, Plug connection: M12 Plug (1/2/3 tier: 5 pole; 4/5 tier: 8 pole)		
Current consumption	50 mA per tier / buzzer 24 V 125 mA per tier / buzzer 12 V		
Nut and seal included in assembly.			
<b>ClassicLOOK with buzzer</b>			
1 tier	red yellow	Connection	24 V AC/DC
		Plug	<b>699 610 75</b>
		Plug	<b>699 630 75</b>
2 tier	green/red yellow/red green/red yellow/red	Cable	<b>699 120 75</b>
		Cable	<b>699 130 75</b>
		Plug	<b>699 220 75</b>
		Plug	<b>699 230 75</b>
3 tier	green/yellow/red green/yellow/red	Cable	<b>699 110 75</b>
		Plug	<b>699 210 75</b>
4 tier	clear/green/yellow/red blue/green/yellow/red clear/green/yellow/red blue/green/yellow/red	Cable	<b>699 140 75</b>
		Cable	<b>699 150 75</b>
		Plug	<b>699 240 75</b>
		Plug	<b>699 250 75</b>
5 tier	blue/clear/green/yellow/red blue/clear/green/yellow/red	Cable	<b>699 160 75</b>
		Plug	<b>699 260 75</b>
<b>ClassicLOOK without buzzer</b>			
2 tier	green/red yellow/red green/red yellow/red	Connection	24 V AC/DC
		Cable	<b>698 120 75</b>
		Cable	<b>698 130 75</b>
		Plug	<b>698 220 75</b>
		Plug	<b>698 230 75</b>
3 tier	green/yellow/red green/yellow/red	Cable	<b>698 110 75</b>
		Plug	<b>698 210 75</b>
4 tier	clear/green/yellow/red blue/green/yellow/red clear/green/yellow/red blue/green/yellow/red	Cable	<b>698 140 75</b>
		Cable	<b>698 150 75</b>
		Plug	<b>698 240 75</b>
		Plug	<b>698 250 75</b>
5 tier	blue/clear/green/yellow/red blue/clear/green/yellow/red	Cable	<b>698 160 75</b>
		Plug	<b>698 260 75</b>
<b>DesignLOOK with buzzer</b>			
1 tier	red yellow	Connection	24 V AC/DC
		Plug	<b>699 810 75</b>
		Plug	<b>699 830 75</b>
2 tier	green/red yellow/red green/red yellow/red	Cable	<b>699 320 75</b>
		Cable	<b>699 330 75</b>
		Plug	<b>699 420 75</b>
		Plug	<b>699 430 75</b>
3 tier	green/yellow/red green/yellow/red	Cable	<b>699 310 75</b>
		Plug	<b>699 410 75</b>



## DesignLOOK



The height of the KOMPAKT 37 can be increased by max. 160 mm with the use of extension tubes, ensuring optimum visibility

### ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:


DesignLOOK with buzzer		Connection	24 V AC/DC
4 tier	clear/green/yellow/red	Cable	<b>699 340 75</b>
	blue/green/yellow/red	Cable	<b>699 350 75</b>
	clear/green/yellow/red	Plug	<b>699 440 75</b>
	blue/green/yellow/red	Plug	<b>699 450 75</b>
5 tier	blue/clear/green/yellow/red	Cable	<b>699 360 75</b>
	blue/clear/green/yellow/red	Plug	<b>699 460 75</b>
DesignLOOK without buzzer		Connection	24 V AC/DC
2 tier	green/red	Cable	<b>698 320 75</b>
	yellow/red	Cable	<b>698 330 75</b>
	green/red	Plug	<b>698 420 75</b>
	yellow/red	Plug	<b>698 430 75</b>
3 tier	green/yellow/red	Cable	<b>698 310 75</b>
	green/yellow/red	Plug	<b>698 410 75</b>
4 tier	clear/green/yellow/red	Cable	<b>698 340 75</b>
	blue/green/yellow/red	Cable	<b>698 350 75</b>
	clear/green/yellow/red	Plug	<b>698 440 75</b>
	blue/green/yellow/red	Plug	<b>698 450 75</b>
5 tier	blue/clear/green/yellow/red	Cable	<b>698 360 75</b>
	blue/clear/green/yellow/red	Plug	<b>698 460 75</b>

### ❖ ACCESSORIES:

	ClassicLOOK	DesignLOOK
Base with integrated tube	<b>960 698 01</b>	<b>960 698 03</b>
Extension tube	<b>960 698 02</b>	<b>960 698 04</b>
Cable 5 m with M12 plug (5 pole)		<b>960 693 05</b>
Cable 5 m with M12 plug (8 pole)		<b>960 000 47</b>
Cable 5 m with M12 connector and plug (8 pole)		<b>960 000 46</b>
Bracket for base mounting	<b>960 698 05</b>	-

Further accessories can be found on page 74.

### ↔ TECHNICAL DIAGRAM:

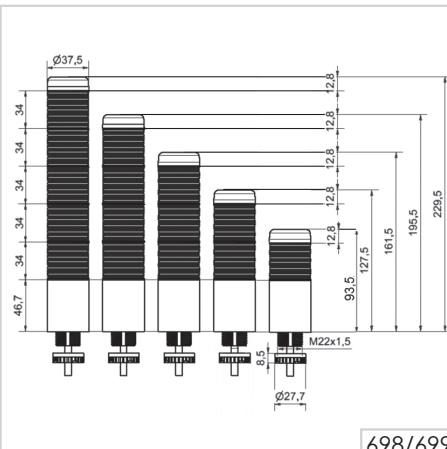

698/699



# eSIGN - electronic modular signal tower

## Your benefits

The new eSIGN brings new dimensions to light. Electronic modularity enables the product to create a variety of signal modes with various colours, brightness levels and light effects, from the classic signal tower to completely customised settings. eSIGN can also switch with ease between variable filling level indications or full-surface signalling. In addition to providing you with an overview of your process cycles, this also opens up completely new options.

- Full-surface signalling: Clear, unmistakeable light effects for maximum visibility
- Versatile customisation options: Different modes, light effects and tones for diverse applications
- Robust industrial design: UL Type 4X ensures resistance to UV radiation and environmental influences
- The right product for every application: 2 sizes, with/without siren, 24 V supply voltage / versions with IO-Link technology, black/white housing

ALSO IN  
WHITE!



## Typical applications

The new definition of the industry standard to signal faults

- on machinery and equipment
- on automated systems
- in assembly plants, for example, in the automotive industry
- on conveyor belts in production and logistics

## Installation options

- Base mounting, Wall mounting, Tube mounting

## Features

- Classic signal tower indication in individual tiers
- Autoscale mode for full-surface signalling and optimum visibility
- Variable filling level indication from 0 to 100 %
- Individual triggering to suit your requirements
- 9 or 15 segments, freely triggerable
- With or without siren
- Standard 24 V version with transfer of the configuration via USB
- Version with IO-Link technology
- M12 connection
- Duration of the acoustic warning adjustable
- A specific acoustic warning can be assigned to each optical warning
- Fraunhofer IPA approval, fulfills Air Cleanliness Class 2 for Cleanroom applications in accordance with DIN EN ISO 14644-1



IO-Link

PROFQ®  
NETO





eSIGN with 15 segments



eSIGN with 9 segments



eSIGN with 6 segments

## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:


	15 segments	9 segments	6 segments
Dimensions (Ø x Height)	72,5 mm x 371,5 mm	72,5 mm x 271 mm	72,5 mm x 219 mm
Housing	PC		
Lens colour/Housing colour	clear/black		
Fixing	Base mounting, wall mounting, tube mounting		
Connections	M12 female connector (4-pin), D-coded		
Light effects	LED/Multicolour, various colours configurable Permanent, blinking, flashing, double flash, triple flash, rotating		
Tone types	Multi-tone, 10 tones are configurable		
Volume	max. 105 dB (A), 4 stages / 80-105 dB (A) depending on tone type		
Voltage	PoE 48V DC		
Current consumption	PoE and PoE+		
Order no.	<b>657 600 56</b>	<b>657 100 56</b>	<b>657 430 56</b>

## ❖ ACCESSORIES

Tube Ø 25 mm, all anodised 100 mm long	<b>975 845 10</b>
250 mm long	<b>975 840 25</b>
Base for tube, plastic	<b>975 840 90</b>
Base for tube, metal	<b>975 840 91</b>
Base with integrated tube	<b>960 000 64</b>
Bracket for 1-sided mounting	<b>960 000 65</b>
Bracket for base mounting	<b>960 000 01</b>
Corner fixing bracket	<b>960 000 41</b>

Further accessories can be found on page 78.

## ↔ TECHNICAL DIAGRAMS:

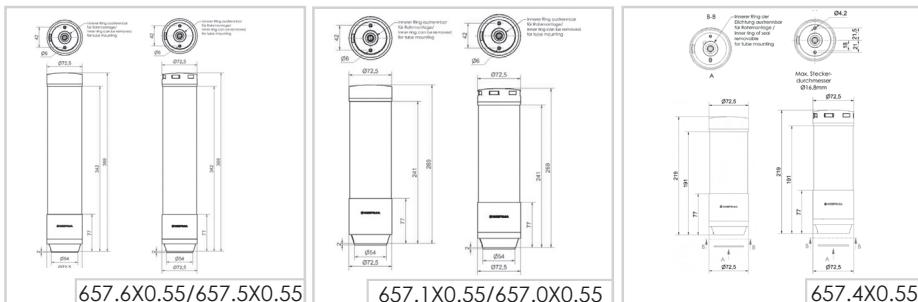



eSIGN with 15 segments



eSIGN with 9 segments



eSIGN with 6 segments

## eSIGN - black

### ⓘ TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:



	15 segments	9 segments	6 segments
Dimensions (Ø x Height)	72,5 mm x 371,5 mm	72,5 mm x 271 mm	72,5 mm x 219 mm
Housing	PC		
Lens colour/ Housing colour	clear/black		
Fixing	Base mounting, wall mounting, tube mounting		
Connections	M12 connector 4 pole (IO Link) 8 pole (standard 24 V)		
Light effects	LED/Multicolour, various colours configurable Permanent, blinking, flashing, double flash, triple flash, rotating		
Tone types	Multi-tone, 10 tones are configurable		
Volume	max. 105 dB (A), 4 stages / 80-105 dB (A) depending on tone type		
Voltage	24 V DC	24 V DC	24 V DC
Current consumption	620 mA (with siren) 555 mA (without siren)	405 mA (with siren) 335 mA (without siren)	325 mA (with siren) 255 mA (without siren)
<b>With siren</b>			
24 V	<b>657 600 55</b>	<b>657 100 55</b>	<b>657 430 55</b>
IO Link	<b>657 610 55</b>	<b>657 110 55</b>	<b>657 450 55</b>
<b>Without siren</b>			
24 V	<b>657 500 55</b>	<b>657 000 55</b>	<b>657 420 55</b>
IO Link	<b>657 510 55</b>	<b>657 010 55</b>	<b>657 440 55</b>

### ⚡ ACCESSORIES

Tube Ø 25 mm, all anodised 100 mm long	<b>975 845 10</b>
250 mm long	<b>975 840 25</b>
Base for tube, plastic	<b>975 840 90</b>
Base for tube, metal	<b>975 840 91</b>
Base with integrated tube	<b>960 000 64</b>
Bracket for 1-sided mounting	<b>960 000 65</b>
Bracket for base mounting	<b>960 000 01</b>
Corner fixing bracket	<b>960 000 41</b>
Cable 5m with M12 connector and plug	<b>960 000 46</b>
Cable 5m with M12 plug	<b>960 000 47</b>
USB cable type C to type A 0,5m (for transferring the configuration)	<b>960 000 69</b>

Further accessories can be found on page 74.

### ↔ TECHNICAL DIAGRAMS:

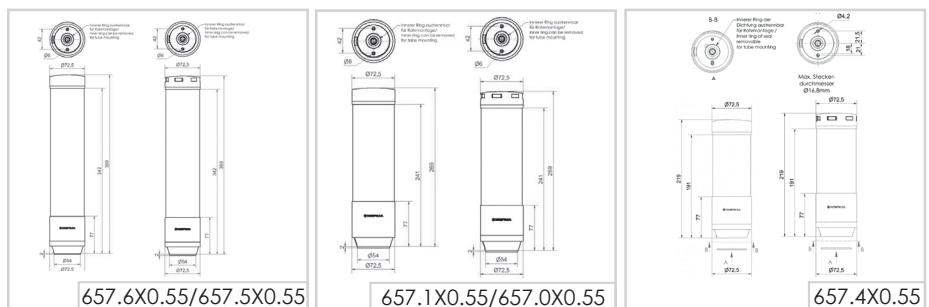



## eSIGN - white



eSIGN with 15 segments



eSIGN with 9 segments



eSIGN with 6 segments

### ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:




	15 segments	9 segments	6 segments
Dimensions (Ø x Height)	72,5 mm x 371,5 mm	72,5 mm x 271 mm	72,5 mm x 219 mm
Housing	PC		
Lens colour/ Housing colour	clear/white		
Fixing	Base mounting, wall mounting, tube mounting		
Connections	M12 connector 4 pole (IO Link) 8 pole (standard 24 V)		
Light effects	LED/Multicolour, various colours configurable Permanent, blinking, flashing, double flash, triple flash, rotating		
Tone types	Multi-tone, 10 tones are configurable		
Volume	max. 105 dB (A), 4 stages / 80-105 dB (A) depending on tone type		
Voltage	24 V DC	24 V DC	24 V DC
Current consumption	620 mA (with siren) 555 mA (without siren)	405 mA (with siren) 335 mA (without siren)	325 mA (with siren) 255 mA (without siren)
<b>With siren</b>			
24 V	<b>657 800 55</b>	<b>657 300 55</b>	<b>657 930 55</b>
IO Link	<b>657 810 55</b>	<b>657 310 55</b>	<b>657 950 55</b>
<b>Without siren</b>			
24 V	<b>657 700 55</b>	<b>657 200 55</b>	<b>657 920 55</b>
IO Link	<b>657 710 55</b>	<b>657 210 55</b>	<b>657 940 55</b>

### ❖ ACCESSORIES

Tube Ø 25 mm, all anodised 100 mm long	<b>975 845 10</b>
250 mm long	<b>975 840 25</b>
Base for tube, plastic	<b>975 840 90</b>
Base for tube, metal	<b>975 840 91</b>
Base with integrated tube	<b>960 000 64</b>
Bracket for 1-sided mounting	<b>960 000 65</b>
Bracket for base mounting	<b>960 000 01</b>
Corner fixing bracket	<b>960 000 41</b>
Cable 5m with M12 connector and plug	<b>960 000 46</b>
Cable 5m with M12 plug	<b>960 000 47</b>
USB cable type C to type A 0,5m (for transferring the configuration)	<b>960 000 69</b>

Further accessories can be found on page 74.

### ↔ TECHNICAL DIAGRAMS:

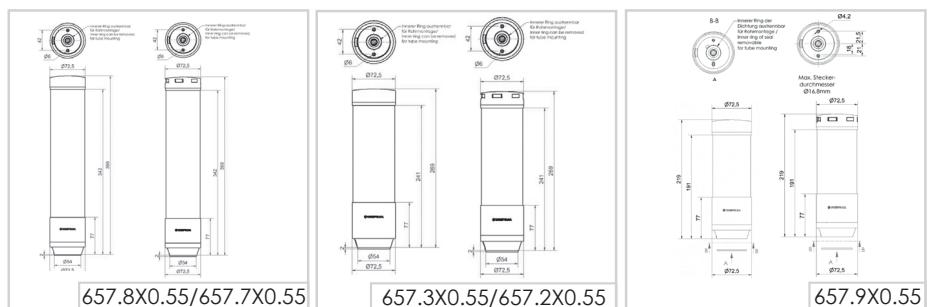

# RST 56 - pre-assembled Signal Tower

## Your Benefits

The new "RST" LED signal towers from WERMA impress with their modern, sleek appearance, outstanding performance and versatile application options. With its integrated design, it not only offers a refined and attractive appearance, but also homogeneous illumination and optimum visibility of the illuminated signals in all directions.

The aesthetic signal tower also impresses with sophisticated features, a compact, slim diameter of 57 mm, multiple mounting options and a high protection rating of IP 66 / IP 69k.

- Modern & robust industrial design
- 2 to 5 tiers
- 360° visibility - no blind spots
- Buzzer: Maximum 90 dB
- Can be connected via cable or M12
- Tamper-proof for public areas
- The IP66/IP69K degree of protection enables use in a wide range of environments

## Typical applications

Signalling faults

- on machines and systems
- on automation systems
- on assembly systems, e.g. in the automotive industry
- on conveyor belts in production and logistics

## Installation options

- Base/pipe mounting
- flush mounting
- Other mounting types possible via accessories

## Features

- Homogeneous light pattern
- Compact design ensures space-saving installation



# RST 56 - Base/Tube mounting



4 tier RST 56 for  
base and tube mounting



2 tier RST 56 for  
base and tube mounting




## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS

	Base or Tube mounting	
Dimensions (Ø x Height)	2 tier: 57 mm x 156 mm 3 tier: 57 mm x 196 mm 4 tier: 57 mm x 236 mm 5 tier: 57 mm x 276 mm	
Housing	PC/ABS	
Lens/Housing	transparent/black	
Light effects	LED Permanent light	
Tone type	Continuous tone, Pulse tone	
Sound output	82 or 90 dB (A), adjustable via dip switch	
Voltage	24 V DC	
With buzzer	Push-in terminals (24 V)	Current consumption
green, red	<b>686 260 35</b>	100 mA
green, yellow, red	<b>686 370 35</b>	150 mA
blue, green, yellow, red	<b>686 480 35</b>	185 mA
white, blue, green, yellow, red	<b>686 590 35</b>	230 mA
Without buzzer	Push-in terminals (24 V)	Current consumption
green, red	<b>686 260 05</b>	70 mA
green, yellow, red	<b>686 370 05</b>	125 mA
blue, green, yellow, red	<b>686 480 05</b>	160 mA
white, blue, green, yellow, red	<b>686 590 05</b>	205 mA

## ❖ ACCESSORIES

Tube Ø 25 mm, all anodised , 100 mm long	<b>975 845 10</b>
250 mm long	<b>975 840 25</b>
Base for Tube, plastic	<b>975 840 90</b>
Base for Tube, metal	<b>975 840 91</b>
Base with integrated tube	<b>960 000 64</b>
Bracket for base mounting with concealed cable entry	<b>960 000 14</b>
Bracket for tube mounting	<b>960 000 01</b>
Corner fixing bracket	<b>960 000 41</b>
Further accessories can be found from page 80.	

## ↔ TECHNICAL DIAGRAM

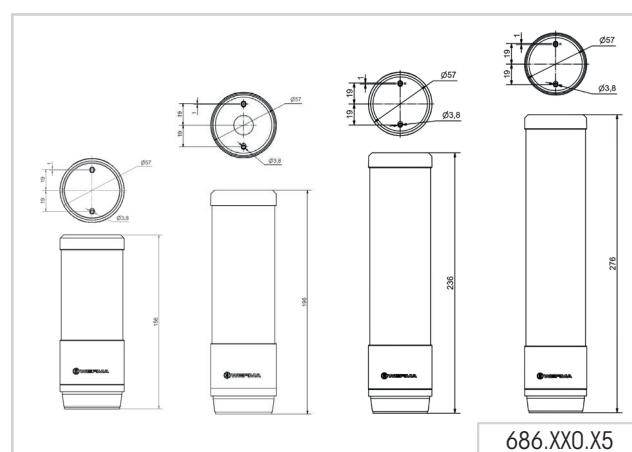

# RST 56 - Installation mounting



2 tier RST 56  
for installation mounting



5 tier RST 56  
for installation mounting


## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS

Installation mounting		
Dimensions (Ø x Height)		* (Protrusion from panel)
2 tier: 57 mm x 135 mm*		3 tier: 57 mm x 175 mm*
3 tier: 57 mm x 175 mm*		4 tier: 57 mm x 215 mm*
4 tier: 57 mm x 215 mm*		5 tier: 57 mm x 255 mm*
Housing		PC/ABS
Lens/Housing		transparent/black
Light effects		LED Permanent light
Tone type		Continuous tone
Sound output		90 dB (A)
Voltage		24 V DC
With buzzer	M12 connector	Current consumption
green, red	<b>686 263 15</b>	100 mA
green, yellow, red	<b>686 373 15</b>	150 mA
blue, green, yellow, red	<b>686 483 15</b>	185 mA
white, blue, green, yellow, red	<b>686 593 15</b>	230 mA
Without buzzer	M12 connector	Current consumption
green, red	<b>686 263 05</b>	70 mA
green, yellow, red	<b>686 373 05</b>	125 mA
blue, green, yellow, red	<b>686 483 05</b>	160 mA
white, blue, green, yellow, red	<b>686 593 05</b>	205 mA



## ❖ ACCESSORIES

Fixing bracket	<b>960 009 32</b>
5m cable with M12 socket	<b>960 693 05</b>

## ↔ TECHNICAL DIAGRAM

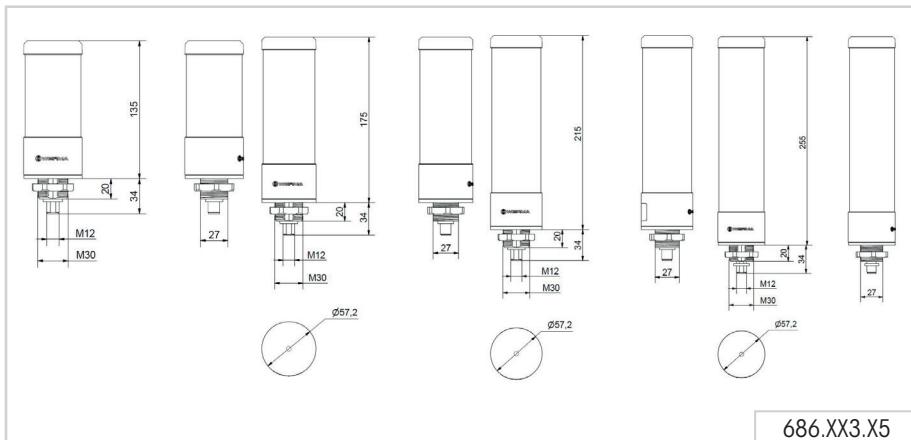

686.XX3.X5



# RST 56 - Pre-configured signal tower - Tube mounting



3 tier  
pre-configured RST 56


## ⓘ TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS

	Tube mounting
Dimensions (Ø x Height)	3 tier: 57 mm x 286 mm
Housing	PC/ABS
Lens/Housing	transparent/black
Light effects	LED Permanent light
Tone type	Continuous tone, Pulse tone
Sound output	82 or 90 dB (A), adjustable via dip switch
Voltage	24 V DC
With buzzer	Push-in terminals (24 V)
green, yellow, red	<b>686 371 35</b>
Without buzzer	Push-in terminals (24 V)
green, yellow, red	<b>686 371 05</b>
	Current consumption
	150 mA
	125 mA

## ⚒ ACCESSORIES

Bracket for base mounting with concealed cable entry	<b>960 000 14</b>
Bracket for base mounting	<b>960 000 01</b>
Corner fixing bracket	<b>960 000 41</b>

## ↔ TECHNICAL DIAGRAM

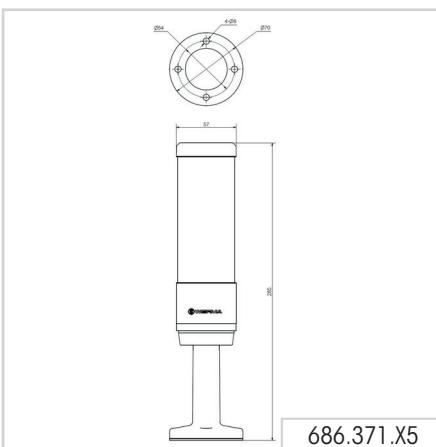

# deSIGN 42 - pre-assembled Signal Tower

## Your benefits

Thanks to its high-quality stainless steel housing, the deSIGN 42 signal tower is an ideal accompaniment to modern, design-oriented assembly lines, production facilities and machinery. The robust housing provides the key benefit of being tamper-proof for installations in public areas.

- Elegant industrial design
- Tamper-proof for public areas

## Typical applications

Fault signalling

- on machinery and equipment

Access control

- on control points in public areas

## Installation options

- Single-hole mounting
- Bracket mounting using accessories

## Features

- High-quality, robust stainless-steel housing
- Award-winning design



Size comparison deSIGN 42 / KombiSIGN 72






### ⓘ TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

	2 tier	3 tier
Dimensions (Ø x Height)	42 mm x 221 mm	42 mm x 255 mm
Housing	Stainless steel, brushed	
Fixing	Installation mounting for Ø 22.5 mm (M22 x 1.5 mm)	
Connection	Cable, 2 m long, included in assembly	
Voltage	24 V DC	24 V DC
Current consumption	50 mA per tier	50 mA per tier
red/green	<b>694 010 55</b>	-
red/yellow	<b>694 020 55</b>	-
red/yellow/green	-	<b>694 000 55</b>

### ⚒ ACCESSORIES:

Surface housing single	<b>975 109 02</b>
Bracket, stainless steel (Protection rating IP 33)	<b>960 694 01</b>

### ↔ TECHNICAL DIAGRAMS:

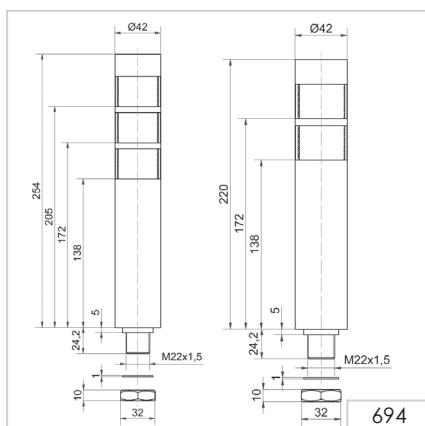

# CleanS/GN - pre-assembled Signal Tower

## Your benefits

The CleanS/GN signal tower has been specifically developed and certified for use in clean rooms, food and hygiene areas as well as the pharmaceutical industry. The signal tower ensures maximum safety in these environments by reducing the risk of contamination.

- Reliable signalling even in clean rooms
- Easy-to-clean, hygienic design for optimal cleaning and disinfection
- Ensures food safety through the absence of uneven surfaces, elevated or countersunk elements where dirt can accumulate
- Use of food safe materials (FDA approved) and resistant to cleaning agents
- Application-specific selection of colours and light effects for maximum flexibility

## Typical applications

### Fault signalling

- in clean rooms, e.g. semiconductor and solar industries
- in the food and beverage industry
- in pharmaceutical and cosmetic industries

## Installation options

- Base mounting
- Ceiling mounting
- Wall mounting

## Features

- Fraunhofer IPA approval
  - » Bracket mounting fulfills Air Cleanliness Class 1 for Cleanroom applications in accordance with DIN EN ISO 14644-1
  - » Base or Ceiling mounting fulfills Air Cleanliness Class 1
- Electronic modularity of the individual tiers (colour and light effects individually adjustable/ can be externally triggered)



Size comparison CleanS/GN / KombiS/GN 72





Fixed, three tier colour distribution in red, yellow and green






The "EVS" light effect ensures a maximum attention-grabbing effect (can be set with complete illumination)

## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

	Wall mounting	Base/Ceiling mounting
Dimensions (L x H x W)	112 mm x 485 mm x 125 mm	112 mm x 391 mm x 125 mm
Housing	PA, black	
Lens	PA, transparent	
Fixing	Wall mounting, integrated mounting bracket	Base mounting, Ceiling mounting
Sound output	85 dB (A)	
<b>CleanSIGN red/green/yellow</b>		
Connection	Cable, 2 m long, included in the assembly	
Colours	Pre-set colours: red/yellow/green	
Voltage	24 V DC	
Current consumption	Optical: < 120 mA per tier Buzzer: < 20 mA	
Order no.	<b>695 300 55</b>	<b>695 310 55</b>
<b>CleanSIGN RGY</b>		
Connection	Screw terminal max. 1.5 mm <sup>2</sup>	
Colours	Colours selectable by dip-switch: red/yellow/green	
Voltage	24 V DC	
Current consumption	Optical: < 240 mA Buzzer: < 20 mA	
Order no.	<b>695 200 55</b>	<b>695 210 55</b>
<b>CleanSIGN RGB</b>		
Connection	Screw terminal max. 1.5 mm <sup>2</sup>	
Colours	Red, yellow, green, white, blue, violet, turquoise Colours selectable by dip-switch	
Light effects	Tier-by-tier illumination: Blinking light Complete illumination: EVS	
Voltage	24 V DC	
Current consumption	Optical: < 240 mA Buzzer: < 20 mA	
Order no.	<b>695 000 55</b>	<b>695 010 55</b>

## ↔ TECHNICAL DIAGRAMS:

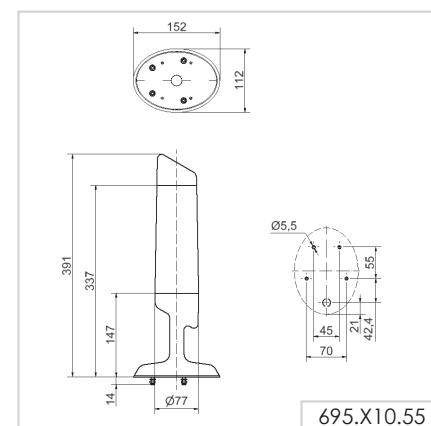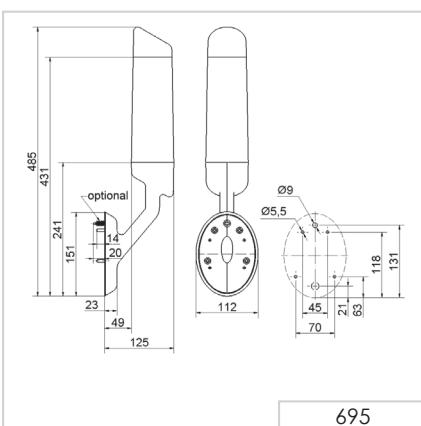



# FlatSIGN - pre-assembled Signal Tower

## Your benefits

The curved front of the FlatSIGN signal tower housing enables it to blend in uniformly with machine and building service applications. The 160-degree visibility angle ensures exceptional visibility even from the side.

- Easy to install – also on flush-mount enclosures
- TwinLIGHT combines two easily selectable light effects

## Typical applications

Fault signalling or Access control

- in building service applications (e.g. server and equipment rooms)
- at access points in public areas

## Installation options

- Wall mounting
- Additional installation options using accessories

## Features

- Permanent or blinking light selectable
- Available with transparent housing or in metal design
- Optional integrated audible signal



**TwinLIGHT**

Size comparison FlatSIGN / KombiSIGN 72





In its inactive state, the signal tower blends into the background thanks to its colourless, translucent housing



FlatSIGN in metallic finish



The fixing kit consists of two tube clamps and an adaptor (accessory)

## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

	Multi-tone Sounder	Buzzer (Continuous tone)
Dimensions (L x H x W)	105 mm x 195 mm x 45 mm	
Lower part	PC-ABS, black	
Upper part	PC, transparent or silver	
Fixing	Wall mounting	
Cable entry	Cable diameter max. 11 mm	
Connection	Screw terminal max. 1.5 mm <sup>2</sup>	
Light effects	Permanent or blinking light selectable	
Audible signal	Buzzer or multi-tone sounder (8 tones)	
Sound output	Max. 80 dB (A)	
Colours:	Green, yellow, red	
Voltage	24 V DC	115-230 V AC
Current consumption	Optical: 30 mA per tier	
	Audible: 30 mA	

### FlatSIGN with transparent housing

FlatSIGN without audible signal	<b>691 100 55</b>	<b>691 100 68</b>
FlatSIGN with audible signal	<b>691 200 55</b>	<b>691 200 68</b>


### FlatSIGN in Metal Design

FlatSIGN without audible signal	<b>691 300 55</b>	<b>691 300 68</b>
FlatSIGN with audible signal	<b>691 400 55</b>	<b>691 400 68</b>

## ❖ ACCESSORIES:

Fixing Kit	<b>975 691 01</b>
------------	-------------------

## ↔ TECHNICAL DIAGRAMS:

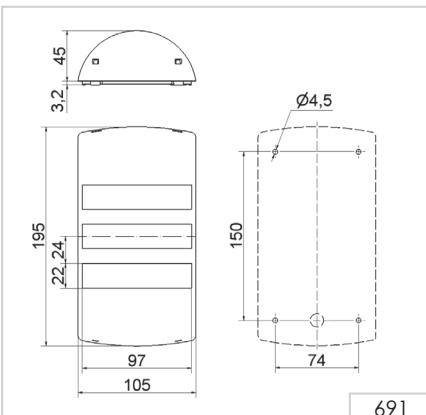

691.X00.55





# VarioSIGN - pre-assembled Signal Tower

## Your benefits

With the VarioSIGN light effects and colours can be individually set and adjusted via dip-switches at any time - depending on the variant. The eye-catching illumination of the entire lighting body ensures an exceptional appearance and visibility.

- Flexible selection of colours and light effects
- Award-winning design

## Typical applications

Fault signalling


- on machinery and equipment
- on automation systems

## Installation options

- Base mounting

## Features

- Optional integrated sounder
- Electronic modularity: i.e. colours and light effects are adjustable for each tier

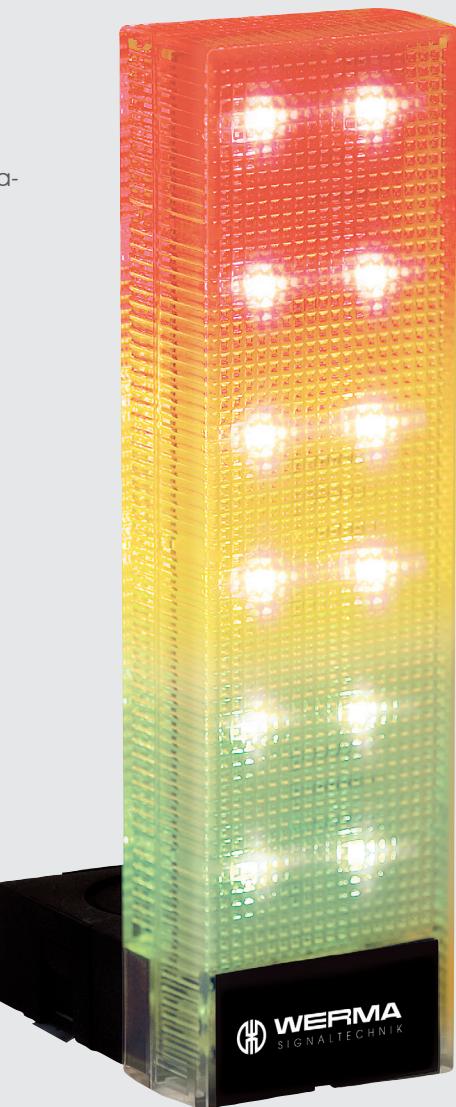



Fixed, three-tier colour distribution in red, yellow and green




The "eVS" light effect ensures a maximum attention-grabbing effect (single colour distribution can be selected)


## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

	With buzzer	Without buzzer
Dimensions (L x H x W)	62 mm x 220 mm x 90 mm	
Housing	PC/ABS-Blend, black	
Lens	PC, transparent	
Fixing	Base mounting	
Cable entry	Cable diameter max. 11 mm	
Connection	Screw terminal max. 1.5 mm <sup>2</sup>	
<b>VarioSIGN - red/yellow/green</b>		
Colours	Pre-set colours (red/yellow/green)	
Voltage	24 V DC	
Current consumption	Optical: < 55 mA per tier Buzzer: < 20 mA	
2-sided	<b>690 300 55</b>	<b>690 320 55</b>
<b>VarioSIGN - RGY</b>		
Colours	Red, yellow, green Colours selectable by Dip-switch	
Voltage	24 V DC	
Current consumption	Optical: < 120 mA Buzzer: < 20 mA	
2-sided	<b>690 200 55</b>	<b>690 220 55</b>
<b>VarioSIGN - RGB</b>		
Colours	Red, yellow, green, white, blue, violet, turquoise Colours selectable by Dip-switch	
Light effects	Tier-by-tier illumination: Flashing light Complete illumination: EVS	
Voltage	24 V DC	
Current consumption	Optical: < 300 mA Buzzer: < 20 mA	
2-sided	<b>690 000 55</b>	-

## ↔ TECHNICAL DIAGRAMS:

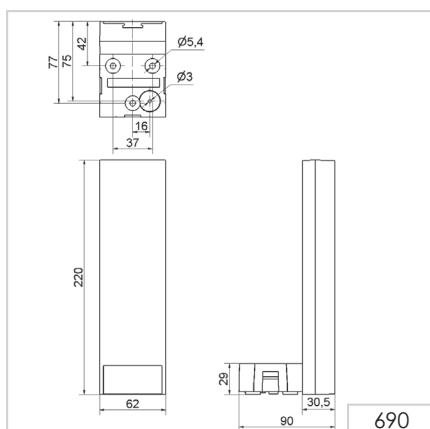

# Overview Accessories for Signal Towers




Overview Accessories for Signal Towers			ClassicLOOK DesignLOOK	ClassicLOOK DesignLOOK	ClassicLOOK DesignLOOK			
Accessory	Picture	KombiSIGN 71	KombiSIGN 72	KombiSIGN 40	KOMPAKT 37	eSIGN	RST 56	Page
Cable, 5m		●				●		82
Bulb BA15d		●						82
Bracket for surface mounting, incl. cable gland M16 x 1.5		●						82
Bracket for 1-sided mounting, incl. rubber seal		●	●	●		●		82
Bracket for 2-sided mounting, incl. rubber seal		●	●	●				82
Bracket for tube mounting, incl. cable gland M16 x 1.5		●	●	●		●	●	86
Bracket for base mounting, with concealed cable entry, incl. rubber seal		●	●	●	●	●	●	86
Corner fixing bracket KOMPAKT 37 with Base-mount tube		●	●	●	●	●	●	86
Bracket for assembly on aluminium profiles, incl. cable gland M12 x 1.5		●	●	●	●			86
Bracket for concealed cable entry				●	●	●		86
Tube Ø 25 mm plastic, for direct mounting of the terminal element onto the Foldaway Base				●	●		●	84
Tube Ø 25 mm, all anodised aluminium		●	●	●		●	●	84
Tube with clamp Ø 25 mm, 250 mm long, incl. cable gland		●	●	●	●	●	●	84
Base with integrated tube Ø 25 mm, 110 mm long, plastic, incl. rubber seal		●	●	●	●	●	●	84
Base for tube Ø 25 mm, plastic, incl. rubber seal		●	●	●	●	●	●	84
Base for tube Ø 25 mm, metal, incl. rubber seal		●	●	●	●	●	●	84
Base with integrated tube					●	●		88
KombiSIGN reflect		●	●	●				82




Overview Accessories for Signal Towers			ClassicLOOK DesignLOOK	ClassicLOOK DesignLOOK	ClassicLOOK DesignLOOK			
Accessory	Picture	KombiSIGN 71	KombiSIGN 72	KombiSIGN 40	KOMPAKT 37	eSIGN*	RST 56	Page
Cable gland for surface mounting, M16 x 1.5		●	●	●	●			84
Adaptor for single hole mounting, Ø 25 mm, M18		●	●	●				82
Adaptor for tube mounting Ø 25 mm		●	●	●				82
Indication board		●	●	●	●	●		82
Foldaway Base, Signal Tower can be folded away, incl. rubber seal		●	●	●	●	●	●	84
Foldaway Base, Signal Tower can be folded away, incl. rubber seal		●	●	●	●	●	●	84
Contact box for cable exit at side		●	●	●	●	●	●	86
Contact box with magnetic base and cable exit at side		●	●	●	●	●	●	86
Extension tube					●	●		88

\* Usage of accessory dependent on version and connection cable. Please check instruction leaflet for compatibility.

Overview Accessories for Signal Towers			deSIGN 42	FlatSIGN	CO <sub>2</sub> Traffic Light	Page
Accessory	Picture					
Surface housing single		●				90
Fixing kit			●			90




# Overview Accessories for Signal Towers

Accessories		
	<p>Cable 5 m with M12 plug + socket  <b>Order no. 960 000 46</b>  Cable 5 m with M12 socket  <b>Order no. 960 000 47</b>  Cable 5 m with M12 plug  <b>Order no. 960 860 01</b></p>	KombiSIGN 71
	<p>Bulb BA15d,  total length max. 42 mm  12 V, 5 Watt <b>955 840 34</b>  24 V, 5 Watt <b>955 840 35</b>  30 V, 5 Watt <b>955 840 32</b>  115 V, 5 Watt <b>955 840 57</b>  230 V, 5 Watt <b>955 840 38</b></p>	KombiSIGN 71
	<p>Bracket for surface mounting incl. cable gland M16 x 1.5  <b>Order no. 960 000 02</b>  Bracket for surface mounting incl. cable gland M16 x 1.5  <b>Order no. 960 000 53</b></p>	KombiSIGN 71, 72
	<p>Adaptor for single hole mounting  Ø 25 mm, M18  <b>Order no. 960 000 25</b></p>	KombiSIGN 71, 72
	<p>Adaptor for single hole mounting  Ø 25 mm, M18  <b>Order no. 960 000 25</b></p>	KombiSIGN 71, 72
	<p>Bracket for 1-sided mounting, incl. rubber seals  <b>Order no. 975 840 85</b>  Bracket for 1-sided mounting, incl. rubber seals  <b>Order no. 960 000 52</b></p>	KombiSIGN 71, 72
	<p>Bracket for 2-sided mounting, incl. rubber seals  <b>Order no. 975 840 86</b></p>	KombiSIGN 71, 72
	<p>KombiSIGN reflect  <b>Order no. 861 640 01</b>   <b>Order no. 861 640 02</b>  </p>	KombiSIGN 71, 72
	<p>Indication board (for tube mounting)  <b>Order no. 960 000 05</b>  Dimensions of indication board (W x H): 153 x 345 mm    Surface area per section (W x H): c. 144 x 54 mm  Avery/Zweckform 3424 (105 x 48 mm),  Herma 4281 (105 x 50.8 mm)  (not included in assembly)    Material: PMMA  <ul style="list-style-type: none"> <li>For one to five modules</li> <li>Simple mounting onto signal tower tube</li> <li>Ample space for written information</li> <li>Simply break off unwanted segments</li> </ul> </p>	KombiSIGN 71, 72



↔ TECHNICAL DIAGRAMS:

<p>960.000.02 960.000.53</p>	<p>960.000.25</p>	<p>975.840.02</p>
<p>975.840.85 960.000.52</p>	<p>975.840.86</p>	<p>KombiSIGN reflect master KombiSIGN reflect slave 861.640.0X</p>
<p>960.000.05</p>		




# Overview Accessories for Signal Towers


Accessories		
	Tube with clamp, Ø 25 mm, 250 mm long, incl. cable gland <b>Order no. 960 000 18</b>	KombiSIGN 71, 72, 40 eSIGN RST 56
	Base with integrated tube, Ø 25 mm, 110 mm long, plastic, incl. rubber seal <b>Order no. 975 840 10</b>	KombiSIGN 71, 72, 40 RST 56
	Base with integrated tube, Ø 25 mm, 110 mm long, plastic, incl. rubber seal <b>Order no. 960 000 51</b>	
	Tube Ø 25 mm, all anodised aluminium 100 mm long <b>975 840 10</b> 250 mm long <b>975 840 25</b> 400 mm long <b>975 840 40</b> 600 mm long <b>975 840 60</b> 800 mm long <b>975 840 80</b> 1000 mm long <b>975 840 03</b>	KombiSIGN 71, 72, 40 eSIGN RST 56
	Base for tube mounting, Ø 25 mm, plastic, incl. rubber seal <b>Order no. 975 840 90*</b>	KombiSIGN 71, 72, 40 *eSIGN RST 56
	Base for tube mounting, Ø 25 mm, plastic, incl. rubber seal <b>Order no. 960 000 50</b>	*IP66/69k (see instructions)
	Base for tube Ø 25 mm, metal, incl. rubber seal, recommended for tube lengths of 400 mm and longer <b>Order no. 975 840 91</b>	KombiSIGN 71, 72, 40 eSIGN RST 56
	Cable gland for surface mounting, M16 x 1.5 <b>Order no. 960 000 04</b>	KombiSIGN 71, 72, 40
	Tube Ø 25 mm, plastic, 45 mm long, for direct mounting on foldaway base (only for KombiSIGN 71 and 72) <b>Order no. 960 000 31</b>	KombiSIGN 71, 72, 40 RST 56
	Foldaway Base - Signal Tower can be folded away, including rubber seal, for tube (all anodised aluminium) Ø 25 mm (not included in assembly) <b>Order no. 960 000 30</b>	KombiSIGN 71, 72, 40 RST 56
	Dimensions (Ø x Height) 70 mm x 117 mm Material: PA-GF Cable diameter: Max. 14 mm Fixing: Vertical, horizontal, Positioning in 7.5° steps	
	Foldaway Base - Signal Tower can be folded away, including rubber seal, for tube (all anodised aluminium) Ø 25 mm (not included in assembly) <b>Order no. 960 009 12</b>	KombiSIGN 71, 72, 40 RST 56
	Dimensions (Ø x Height) 70 mm x 85 mm Material: PA-GF Cable diameter: Max. 8 mm Fixing: Vertical, horizontal, Positioning in 0° and 90°	


**↔ TECHNICAL DIAGRAMS:**

<p>960 000 18</p>	<p>975.840.10 960.000.51</p>	<p>975.845.10 975.840.25 975.840.40</p>
<p>975.840.60</p>	<p>975.840.80</p>	<p>975.840.03</p>
<p>975.840.90 960.000.50</p>	<p>975.840.91</p>	<p>960.000.04</p>
<p>960.000.31</p>	<p>960.000.30</p>	<p>960.009.12</p>



# Overview Accessories for Signal Towers

Accessories	Zubehör kompatibel mit
 <p>Bracket for tube mounting, incl. cable gland M16 x 1.5  <b>Order no. 960 000 01</b></p> <p>Bracket for tube mounting, incl. cable gland M16 x 1.5  <b>Order no. 960 000 54</b></p>	KombiSIGN 71, 72, 40 KOMPAKT 37 eSIGN RST 56
 <p>Bracket for base mounting, with concealed cable entry, incl. rubber seals  <b>Order no. 960 000 14</b></p> <p>Bracket for base mounting, with concealed cable entry, incl. rubber seals  <b>Order no. 960 000 55</b></p>	KombiSIGN 71, 72, 40 KOMPAKT 37 RST 56
 <p>Corner fixing bracket  (KOMPAKT 37 with Base-mount tube)  <b>Order no. 960 000 41</b></p>	KombiSIGN 71, 72, 40 KOMPAKT 37 eSIGN RST 56
 <p>Contact box for cable exit at side, with mounting material and seal, cable gland M16 x 1.5  <b>Order no. 975 840 01</b></p>	KombiSIGN 71, 72, 40 KOMPAKT 37
 <p>Contact box with magnetic base and cable exit at side cable gland M16 x 1.5  <b>Order no. 975 840 04</b></p>	KombiSIGN 71, 72, 40 KOMPAKT 37
 <p>Bracket for assembly on aluminium profiles incl. cable gland M12 x 1.5  <b>Order no. 960 630 02</b></p> <p>Bracket for assembly on aluminium profiles incl. cable gland M12 x 1.5  <b>Order no. 960 630 06</b></p>	KombiSIGN 40
 <p>Bracket for concealed cable entry  <b>Order no. 960 630 01</b></p> <p>Bracket for concealed cable entry  <b>Order no. 960 630 05</b></p>	KombiSIGN 40
 <p>Indication board  (base/wall mounting)  <b>Order no. 960 630 08</b></p> <p>Indication board  (tube mounting)  <b>Order no. 960 630 09</b></p>	KombiSIGN 40
 <p>USB cable type C to type A 3 m  <b>Order no. 960 000 71</b></p>	KombiSIGN 40


**↔ TECHNICAL DIAGRAMS:**

<p>960.000.01 960.000.54</p>	<p>960.000.14 960.000.55</p>	<p>960.000.41</p>
<p>975.840.01</p>	<p>975.840.04</p>	
<p>960.630.02 960.630.06</p>	<p>960.630.01 960.630.05</p>	<p>960.630.08</p>
<p>960.630.09</p>		








## Overview Accessories for Signal Towers

Accessories		
	Extension tube <b>Order no. 960 698 02</b>	KOMPAKT 37
	Extension tube <b>Order no. 960 698 04</b>	
	Base with integrated tube <b>Order no. 960 698 01</b>	KOMPAKT 37
	Base with integrated tube <b>Order no. 960 698 03</b>	
	Bracket for base mounting <b>Order no. 960 698 05</b>	KOMPAKT 37
	Cable 5 m with M12 connector and plug <b>Order no. 960 000 46**</b> Cable 5 m with M12 plug <b>Order no. 960 000 47**</b> USB cable type C to type A 0.5 m <b>Order no. 960 000 69**</b> USB cable type C to type A 1.8 m <b>Order no. 960 000 70**</b>	eSIGN
	Bracket for 1-sided mounting <b>Order no. 960 000 65*</b>	eSIGN
	Base with integrated tube, Ø 25 mm, 110 mm long, plastic, incl. rubber seal <b>Order no. 960 000 64*</b>	eSIGN

\* = UL Type 4X and IP 66/69K (see instructions for exact details)



\*\* = Standard 24 V

↔ TECHNICAL DIAGRAMS:

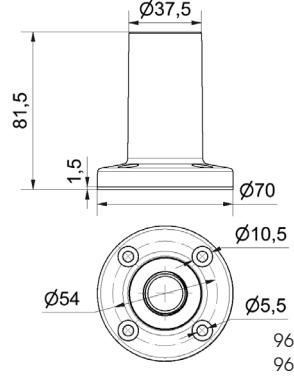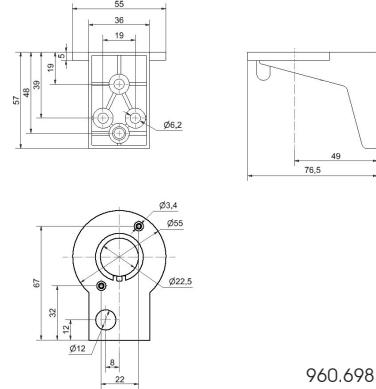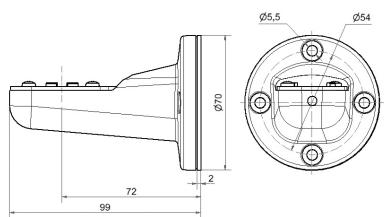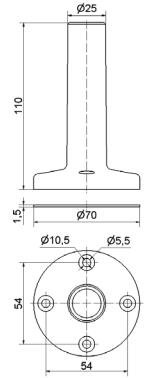
 <p>960.698.02 960.698.04</p>	 <p>960.698.01 960.698.03</p>	 <p>960.698.05</p>
 <p>960.000.65</p>	 <p>960.000.64</p>	



# Overview Accessories for Signal Towers

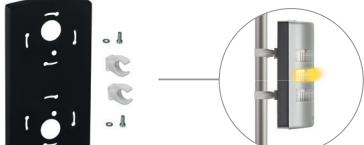Accessories		
	Surface housing single <b>Order no. 975 109 02</b>	deSIGN 42
	Bracket, stainless steel (Protection rating IP33) <b>Order no. 960 694 01</b>	deSIGN 42
	Fixing kit <b>Order no. 975 691 01</b>	FlatSIGN

↔ TECHNICAL DIAGRAMS:

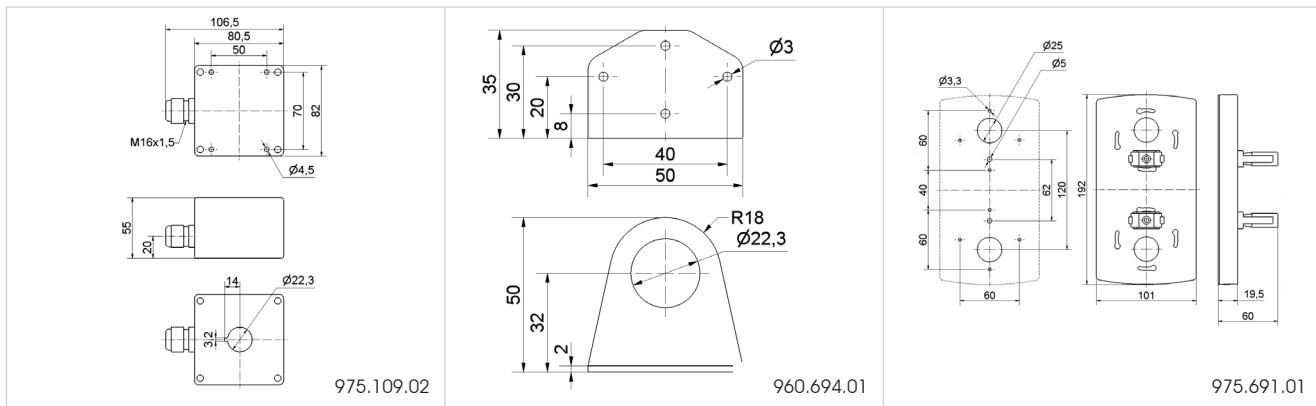





Beacons & Traffic Lights

# Overview Beacons & Traffic Lights

WERMA's beacons and traffic lights help you indicate risks and imminent danger promptly and clearly. The urgency of the required action can be indicated by the colour of the light and by the type and duration of the signal.

This allows you to make your processes safe and efficient. Simply safe. Simply better. This is what we call intelligent signal technology.



Overview Signal Beacons & Traffic Lights								
		Installation			Surface mounting			
Technical specification	Variant	Micro	Frosted	Mini	Mini	Midi	Maxi	Monitorable Beacon
		23X	240, 241, 239 ASi	80X, 816, 81X, USB, EvoSIGNAL	EvoSIGNAL	EvoSIGNAL	EvoSIGNAL	806, 829
Dimensions (Ø x Height)*		See technical specifications						
Voltage	12 V	●		●	●	●	●	
	24 V	●	●	●	●	●	●	●
	48 V							
	115 V	●		●	●	●	●	
	230 V	●		●	●	●	●	
Optical	LED Permanent Light	●	●	●				●
	LED Blinking Light		●	●				
	LED Permanent Light (multicolour)			●	TriCOLOUR	TriCOLOUR		
	TwinLIGHT (Permanent/Blinking)		●		●	●	●	
	TwinFLASH (Flash/EVS)		●		●	●	●	
	LED Flashing Light		●					
	LED EVS Light							
	Permanent Light							●
	LED Rotating				●	●	●	
	Rotating Mirror/Rotating Light				●	●	●	
Protection Rating		IP65	IP65	IP65	IP66	IP66	IP66	IP65
Page		Page 97	Page 99	Page 108	Page 114	Page 117	Page 120	Page 123


\* Technical diagrams can be found on the product page

## Installation beacons

Installation beacons are used for installation in M20/M22 drilled holes. The beacon is fixed from the back, in control panels for example, using a locking nut. This prevents subsequent tampering.

## Surface mounted beacons

Surface mounted beacons are fixed directly onto the surface of the relevant object (machines). The basic mounting options are base, bracket or tube installation.

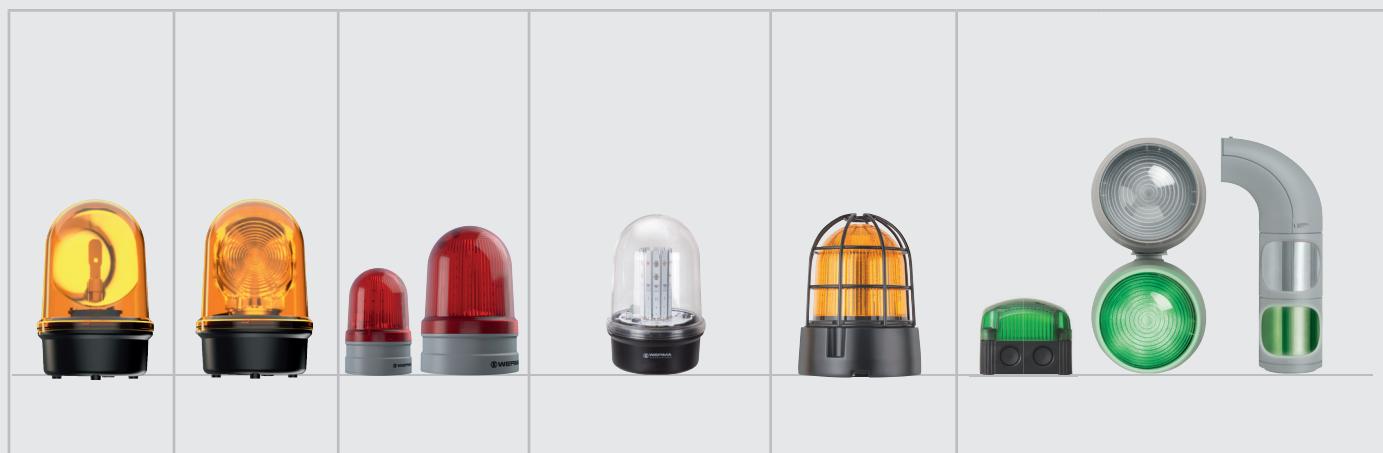

Rotating beacon			Obstruction Lights	Heavy Duty	Traffic Lights	
LED-Rotating Mirror Beacon	LED-Rotating Beacon Fresnel	LED-Rotating	Low Intensity Type A and B			
883, 885	884	EvoSIGNAL Midi + Maxi	280, 281	839	FlexSQUARE, 890, 895, 897, 894	
See technical specifications						
●	●	●	●	●	●	●
●	●	●	●	●	●	●
●	●	●	●	●	●	●
●	●	●	●	●	●	●
TriCOLOUR (Midi)						
		●			●	●
		●				
●	●	●		●	●	
IP65	IP65	IP66	IP65 / IP66/68	IP67	IP67	IP65/IP69k
Page 127	Page 129	Page 130 + 131	Page 132	Page 135	Page 138	Page 144
						Page 152





## Sizes

### Comparison of WERMA beacons and traffic lights





Series	230	240	241	EvoSIGNAL Mini
Thread	M20	M30	M22	M22
Ø	29 mm	55 mm	35 mm	62 mm
Height (Protrusion from panel)	32 mm	46 mm	64 mm	85 mm



Series	EvoSIGNAL Mini	EvoSIGNAL Midi	EvoSIGNAL Maxi
Ø	62 mm	85 mm	120 mm
Height	85 mm	130 mm	173 mm



Series	839	280	281
Ø	153 mm	142 mm	165 mm
Height	189 mm	218 mm	205 mm

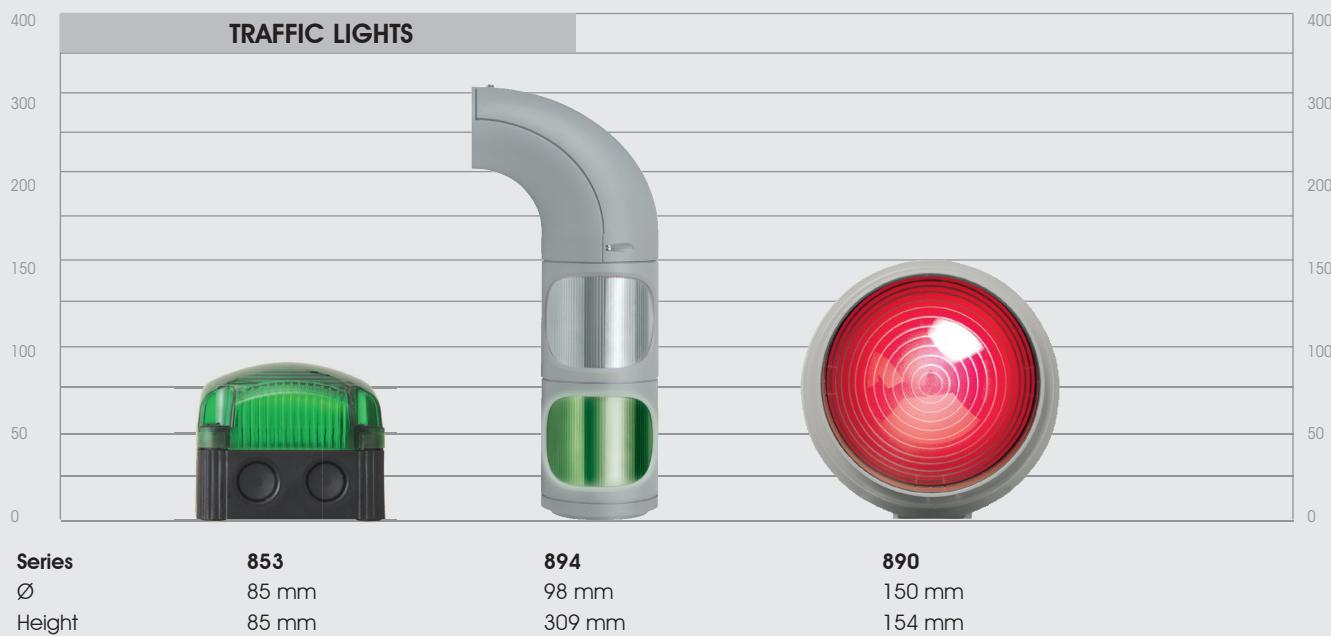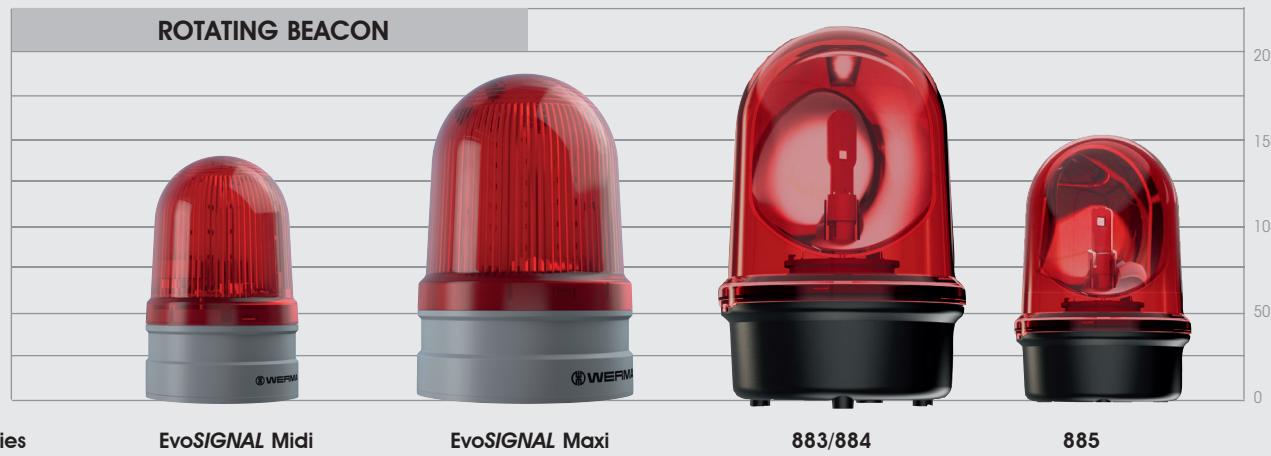



# Micro Installation Beacons - 23x

## Your benefits

Despite their size, micro installation beacons from the 230 / 231 / 232 range will provide good all-round visibility. The range includes control panel indicator lights.

- The industry standard for control panels
- Easy to install, even where space is restricted

## Typical applications

Signalling faults and statuses

- On small machines and equipment
- In building technology

## Installation options

- M22 single-hole mounting including nut
- M20 for direct installation, in safety switches, for example

## Features

- Available with a permanent light



# 230 LED Installation Beacon




Mainly sideways illumination

## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height):	29 mm x 32 mm (Protrusion from panel)			
Housing:	PC/ABS-Blend			
Lens:	PC, transparent			
Connection:	2 wires, c. 115 mm long			
Fixing:	Installation mounting for Ø 20.5 mm (M20 x 1.5 mm)			
Life duration:	Up to 100,000 hrs			
Seal included in assembly.				
Voltage:	12 V DC	24 V DC	115 V AC	230 V AC
Current consumption:	80 mA	45 mA	15 mA	20 mA
red	<b>230 100 54</b>	<b>230 100 55</b>	<b>230 100 67</b>	<b>230 100 68</b>
yellow	<b>230 300 54</b>	<b>230 300 55</b>	<b>230 300 67</b>	<b>230 300 68</b>
clear	-	<b>230 400 55</b>	-	-

Further colours on request.

## ↔ TECHNICAL DIAGRAM:

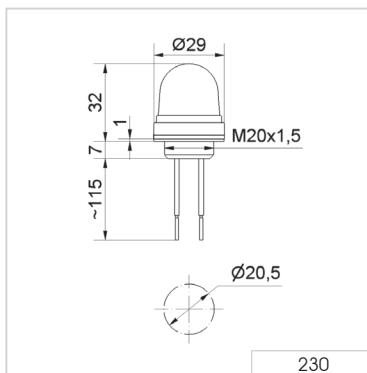

The LED Installation Beacon 230 can for example be used in applications with cable-operated switches or limit switch devices



## 231 LED Installation Beacon




Mainly sideways illumination

### ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height):	29 mm x 32 mm (Protrusion from panel)			
Housing:	PC/ABS-Blend			
Lens:	PC, transparent			
Connection:	2 wires, c. 105 mm long			
Fixing:	Installation mounting for Ø 22.5 mm (M22 x 1.5 mm)			
Life duration:	Up to 100,000 hrs			
Nut and seal included in assembly.				
Voltage:	12 V DC	24 V DC	115 V AC	230 V AC
Current consumption:	80 mA	45 mA	15 mA	20 mA
red	<b>231 100 54</b>	<b>231 100 55</b>	<b>231 100 67</b>	<b>231 100 68</b>
green	<b>231 200 54</b>	<b>231 200 55</b>	<b>231 200 67</b>	<b>231 200 68</b>
yellow	<b>231 300 54</b>	<b>231 300 55</b>	<b>231 300 67</b>	<b>231 300 68</b>
clear	<b>231 400 54</b>	<b>231 400 55</b>	<b>231 400 67</b>	<b>231 400 68</b>
blue	<b>231 500 54</b>	<b>231 500 55</b>	<b>231 500 67</b>	<b>231 500 68</b>

### ↔ TECHNICAL DIAGRAM:

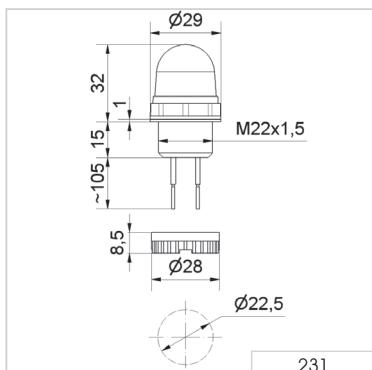

24 V



# Mini Installation Beacons - 239/24x

## Your benefits

WERMA's mini installation beacons are perfect for use on machinery and control panels. The colours can be set quite simply by means of binary inputs.

- Up to seven different colours with just one light
- Low lens, where space is restricted
- Raised lens for best visibility also from the side

## Typical applications

Signalling faults and statuses

- On control consoles of machinery
- In machine housings
- On control panels

## Installation options

- M22 single-hole mounting (239,241)
- M30 single-hole mounting (240)

## Features

- Bit-encoded actuation allows the three basic colours green, yellow and red to be displayed using just two PLC outputs. With a third output, white and blue can also be activated.
- With Spec. V 3.0, the special AS interface version is suitable for addressing (A/B mode) up to 62 modules – without an external power supply (239)

### Touch variants (MC55):

- Reporting and acknowledging an alarm when the machine is at a standstill and reporting back when the error is fixed
- Reporting a problem/error using a touch button
- Starting and stopping a machine using a touch button
- Switching a device by pressing and holding or pressing the touch button
- Escalation if an error condition persists for too long



# 239 LED Installation Beacon (Multicolour) for AS-Interface




Five colours in one beacon:  
red, yellow, green, white and blue

## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height):	50 mm x 22 mm (Protrusion from panel)
Housing:	PC/ABS-Blend, black
Lens:	PC, transparent
Fixing:	Installation mounting for Ø 22.5 mm (M22 x 1.5 mm) with anti-twist device
Connection:	Screw terminal with wire protection max. 1.5 mm <sup>2</sup>
Power supply AS-Interface:	Via bus conduction
Operating voltage:	25 V ... 31.6 V according to the AS-Interface specification
Current consumption:	≤ 100 mA
Specification:	V3.0
IO-Code:	8 <sub>HEX</sub>
ID-Code:	A <sub>HEX</sub>
ID2-Code:	E <sub>HEX</sub>
Colour options:	Red, yellow, green, white, blue
Life duration:	Up to 50,000 hrs
Nut and seal included in assembly.	
LED Installation Beacon (multicolour) for AS-Interface	<b>239 780 55</b>

## ↔ TECHNICAL DIAGRAM:

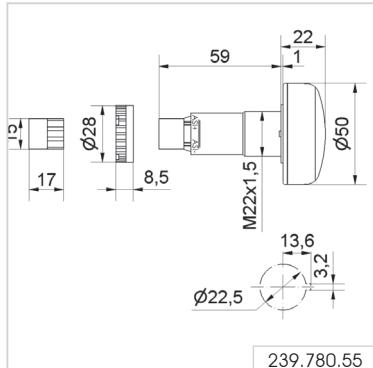

Approval No. 2001



# 241 LED Installation Beacon (Multicolour/MC35) with UL




## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS

Dimensions (Ø x Height)	35 mm x 64 mm (Protrusion from panel)	
Housing	PC/ABS-Blend, black	
Lens	PC, transparent	
Fixing	Installation mounting M22	
Connection	M12 5 PIN	
Colour options	Red, yellow, green, white, blue, violet, turquoise (Multicolour) Red, yellow, green (Tricolour)	
Light effects	Permanent light	
Life duration light	Up to 50,000 hrs	
Life duration buzzer	Up to 5,000 hrs	
Voltage	Current consumption	Plug M12
Tricolour (RGY)	24 V DC	20 mA
Multicolour (RGB)	10-30 V DC	30 mA
		<b>241 420 55</b>
		<b>241 320 50</b>

## MC35 High IO-Link

Connection	M12 4 PIN
Colour options	Multicolour LED, configurable colours > 1 million colours
Light effects	Permanent, blinking, flashing and pulse light
Voltage	18-30 V DC
Current consumption	25 mA
Order no.	<b>241 510 00</b>

## ↔ TECHNICAL DIAGRAM

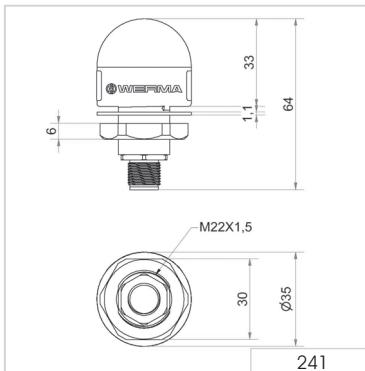



## 240 LED Installation Beacon (Multicolour/MC55) with or without UL

### ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS

Dimensions (Ø x Height)	55 mm x 46 mm (Protrusion from panel)		
Housing	PC/ABS-Blend, black PC black (UL version)		
Lens	PC, transparent		
Fixing	Installation mounting M30		
Colour options	Red, yellow, green, white, blue, violet, turquoise (Multicolour) Red, yellow, green (Tricolour)		
Light effects	Permanent light, permanent and blinking light (1 Hz) (240 110 50)		
Life duration light	Up to 50,000 hrs		
Life duration buzzer	Up to 5,000 hrs		
<b>Without UL</b>	Voltage	Current consumption	Plug M12
Tricolour (RGY)	24 V DC	45 mA	<b>240 220 55</b>
Multicolour (RGB)	10-30 V DC	60 mA	<b>240 120 50</b>
<b>With UL</b>			
Tricolour (RGY)	24 V DC	40 mA	<b>240 420 55</b>
Multicolour (RGB)	10-30 V DC	100 mA	<b>240 320 50</b>





## 240 LED Installation Beacon (Multicolour/MC55 Smart) with UL

### ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS

Dimensions (Ø x Height)	55 mm x 46 mm (Protrusion from panel)		
Housing	PC black		
Lens	PC, transparent		
Fixing	Installation mounting M30		
Connection	M12 5 PIN		
Colour options	Multicolour LED, configurable colours > 1 million colours		
Light effects	Permanent, blinking, flashing and pulse light		
Lebensdauer Optik	Up to 50,000 hrs		
Voltage	24 V DC		
Current consumption	max. 130 mA		
Order no.	<b>240 520 00</b>		

### ↔ TECHNICAL DIAGRAM

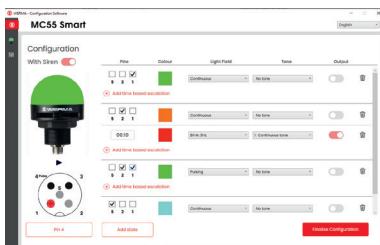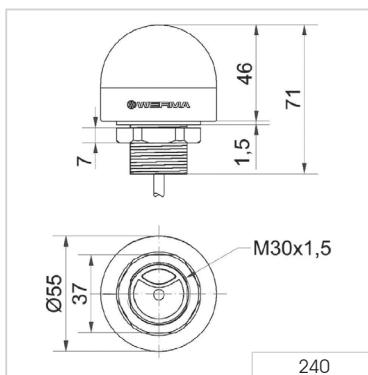

Configuration software for the Smart version

240.520.00  
240.420.55  
240.320.50



## 240 LED Installation Beacon (Multicolour/MC55 IO-Link)



### ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS

Dimensions (Ø x Height)	55 mm x 46 mm (Protrusion from panel)
Housing	PC black
Lens	PC, transparent
Fixing	Installation mounting M30
Connection	M12 4 PIN
Colour options	Multicolour LED, configurable colours > 1 million colours
Light effects	Permanent, blinking, flashing and pulse light
Life duration light	Up to 50,000 hrs
Voltage	18-30 V DC
Current consumption	55 mA
Order no.	<b>240 510 00</b>


## 240 LED Beacon (Multicolour/MC55) Tube and base mounting



### ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS

Dimensions (Ø x Height)	55 mm x 81 mm	
Housing	PC black	
Lens	PC, transparent	
Fixing	Installation mounting M30	
Connection	M12 5 PIN	
Colour options	Red, yellow, green, white, blue, violet, turquoise (Multicolour) Red, yellow, green (Tricolour)	
Light effects	Permanent light	
Life duration light	Up to 50,000 hrs	
Voltage	Current consumption	
Tricolour (RGY)	24 V DC	42 mA
Multicolour (RGB)	10-30 V DC	58 mA
		<b>240 500 02</b>
		<b>240 500 00</b>

### ↔ TECHNICAL DIAGRAM

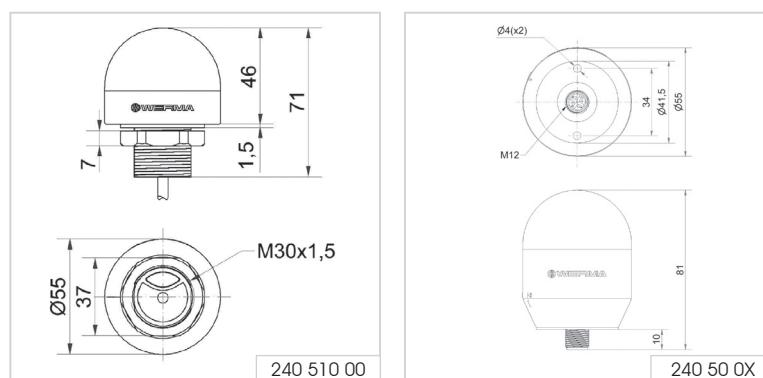



## 240 LED Installation Beacon (Multicolour/MC55 Touch)

### ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS


Dimensions (Ø x Height):	55 mm x 44 mm (Protrusion from panel)		
Housing:	PC, black		
Lens:	PC, transparent		
Fixing:	Installation mounting M30		
Connection:	M12 5 PIN		
Colour options:	Red, yellow, green (Tricolour)		
Light effects:	Permanent light		
Life duration light:	Up to 50,000 hrs		
Ausgangsstrom	max. 200 mA		
Ausgang	Puls-Feedback		
	Voltage	Current consumption	NPN
Tricolour (RGY)	24 V DC	50 mA	<b>240 260 55</b>
			PNP
			<b>240 280 55</b>

## 240 LED Installation Beacon (Multicolour/MC55 Touch Smart)

### ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS

Dimensions (Ø x Height):	55 mm x 44 mm (Protrusion from panel)		
Housing:	PC, black		
Lens:	PC, transparent		
Fixing:	Installation mounting M30		
Connection:	M12 5 PIN		
Colour options:	Multicolour LED, configurable colours > 1 million colours		
Light effects:	Permanent, Blinking, Flashing and Pulse light		
Life duration light:	Up to 50,000 hrs		
Voltage	24 V DC		
Current consumption	60 mA		
Order no.	<b>240 160 55</b>		

### ↔ TECHNICAL DIAGRAM

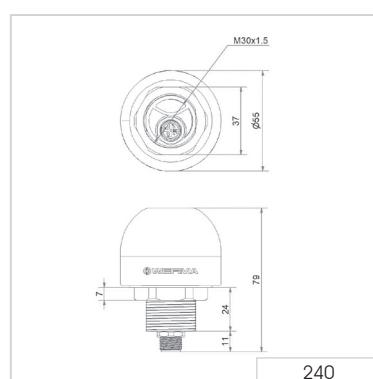

Configuration software for the Smart version




# 240 LED Installation Beacon (Multicolour/MC55 Touch IO-Link)



## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS

Dimensions (Ø x Height)	55 mm x 44 mm (Protrusion from panel)
Housing	PC black
Lens	PC, transparent
Fixing	Einbaumontage M30
Connection	M12 4 PIN
Colour options	Multicolour LED, configurable colours > 1 million colours
Light effects	Permanent, blinking, flashing and pulse light
Life duration light	Up to 50,000 hrs
Voltage	18-30 V DC
Current consumption	55 mA
Order no.	<b>240 510 02</b>

## ↔ TECHNICAL DIAGRAM

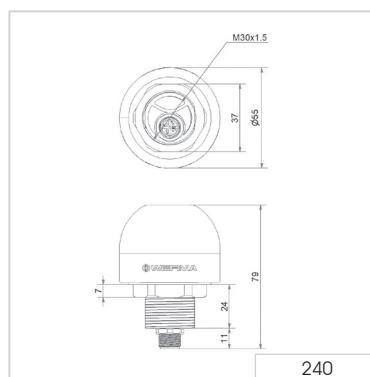



## 240 LED Beacon Multicolour MC55 High Tube and base mounting

### ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS

Dimensions (Ø x Height)	55 mm x 111 mm
Housing	PC black
Lens	PC, transparent
Fixing	Installation mounting M30
Connection	M12 5 PIN (IO-Link: M12 4 PIN)
Life duration light	Up to 50,000 hrs

### MC55 High

Colour options	Red, yellow, green, white, blue, violet, turquoise (Multicolour) Red, yellow, green (Tricolour)		
Light effects	Permanent light		
	Voltage	Current consumption	
Tricolour (RGY)	24 V DC	42 mA	<b>240 600 03</b>
Multicolour (RGB)	10-30 V DC	max. 130 mA	<b>240 600 01</b>



### MC55 High Smart

Colour options	Multicolour LED, configurable colours > 1 million colours		
Light effects	Permanent, blinking, flashing and pulse light		
Voltage	24 V DC		
Current consumption	max. 130 mA		
Order no.	<b>240 620 00</b>		

### MC55 High IO-Link

Colour options	Multicolour LED, configurable colours > 1 million colours		
Light effects	Permanent, blinking, flashing and pulse light		
Voltage	18-30 V DC		
Current consumption	55 mA		
Order no.	<b>240 610 00</b>		

### ↔ MASSZEICHNUNG

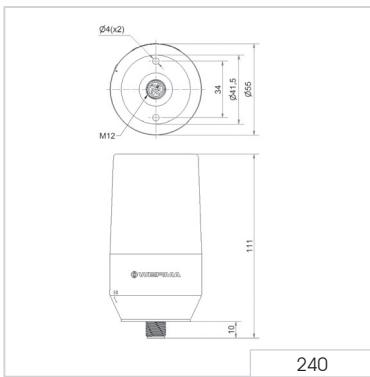

+50°C

-20°C

# 240 LED Installation Beacon Multicolour MC55 High

## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS



Dimensions (Ø x Height) 55 mm x 77 mm (in eingebautem Zustand)

Housing PC schwarz

Lens PC, transparent

Fixing Installation mounting M30

Connection M12 5 PIN (IO-Link: M12 4 PIN)

Life duration light Up to 50,000 hrs

## MC55 High

Colour options	Red, yellow, green, white, blue, violet, turquoise (Multicolour) Red, yellow, green (Tricolour)
----------------	--

Light effects Permanent light

	Voltage	Current consumption	
Tricolour (RGY)	24 V DC	42 mA	<b>240 600 11</b>
Multicolour (RGB)	10-30 V DC	max. 130 mA	<b>240 600 09</b>

## MC55 High Smart

Colour options Multicolour LED, configurable colours > 1 million colours

Light effects Permanent, blinking, flashing and pulse light

Voltage 24 V DC

Current consumption max. 130 mA

Order no. **240 620 02**

## MC55 High IO-Link

Colour options Multicolour LED, configurable colours > 1 million colours




Light effects Permanent, blinking, flashing and pulse light

Voltage 18-30 V DC

Current consumption 55 mA

Order no. **240 610 02**

## ↔ MASSZEICHNUNG

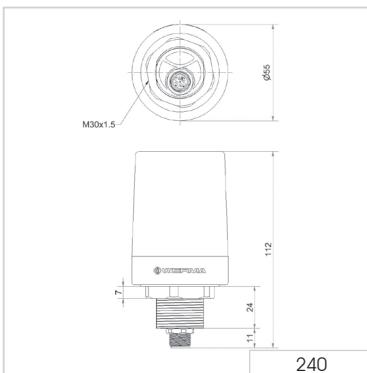

# Mini Beacons - 800/801/816 families + EvoSIGNAL

## Your benefits

The Mini Signal Beacons are used wherever space is restricted.

The beacons are easy to install and connect, even in tight spaces, thanks to convenient connection terminals and easily accessible mounting holes.

- Reliable signalling at close quarters
- Available as a permanent light or as a bright Xenon flash light to attract attention
- Robust and tamper-proof

## Typical applications

Signalling of faults

- On small machines and equipment
- In building technology

## Installation options

- Base mounting
- M22/PG29 single-hole mounting
- Bracket mounting
- Tube mounting

## Features

- High protection rating IP65 for both indoor and outdoor use

### The 816 :

- Robust and shock-resistant up to 20 joules



Size comparison Mini 239/Mini



# 260 LED Installation Beacon EvoSIGNAL Mini





## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height):	62 mm x 85 mm		
Housing:	PC-ABS, grey, high impact		
Lens:	PC, transparent		
Fixing:	Installation mounting		
Cable entry:	Cable diameter 8-12 mm		
Connection:	Push-In terminal max. 1.5 mm <sup>2</sup>		
Flash/Blink frequency:	1 Hz		
<b>TwinLIGHT (Permanent/Blinking)</b>			
Voltage:	12 V AC/DC	24 V AC/DC	115-230 V AC
Current consumption:	≤ 90 mA	≤ 75 mA	≤ 45 mA
red	<b>260 110 74</b>	<b>260 110 75</b>	<b>260 110 60</b>
green	<b>260 210 74</b>	<b>260 210 75</b>	<b>260 210 60</b>
yellow	<b>260 310 74</b>	<b>260 310 75</b>	<b>260 310 60</b>
white	<b>260 410 74</b>	<b>260 410 75</b>	<b>260 410 60</b>
blue	<b>260 510 74</b>	<b>260 510 75</b>	<b>260 510 60</b>
<b>TwinFLASH (Flash/EVS)</b>			
Voltage:	12 V AC/DC	24 V AC/DC	115-230 V AC
Current consumption:	≤ 70 mA	≤ 75 mA	≤ 45 mA
red	<b>260 120 74</b>	<b>260 120 75</b>	<b>260 120 60</b>
green	<b>260 220 74</b>	<b>260 220 75</b>	<b>260 220 60</b>
yellow	<b>260 320 74</b>	<b>260 320 75</b>	<b>260 320 60</b>
white	<b>260 420 74</b>	<b>260 420 75</b>	<b>260 420 60</b>
blue	<b>260 520 74</b>	<b>260 520 75</b>	<b>260 520 60</b>
<b>TriCOLOUR</b>			
Voltage:		24 V AC/DC	
Current consumption:		≤ 90 mA	
Order no.		<b>260 430 75</b>	

## ❖ ACCESSORIES:

Installation mounting M22	<b>260 700 03</b>
Installation mounting PG 29	<b>260 700 04</b>

## ↔ TECHNICAL DIAGRAM:

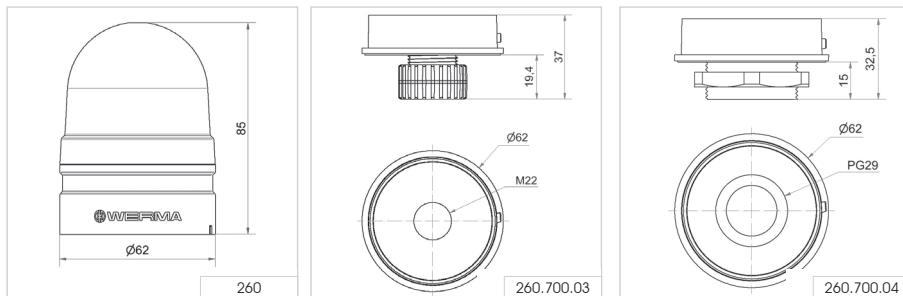

# 800 Installation Permanent Beacon - PG29 (Ø 37 mm)



Bulb change via rear access with bayonet holder



Accessories

## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:


Dimensions (Ø x Height):	57 mm x 54 mm (Protrusion from panel)
Housing:	PC/ABS-Blend
	Socket: PA-GF, high impact
Lens:	PC, transparent
Connection:	Screw terminal 0.5 -1.5 mm <sup>2</sup>
Fixing:	Installation mounting for Ø 37 mm (PG29)
Operating voltage:	12-230 V
Bulb socket:	BA15d, 5 Watt max.
Bulb change:	Via rear access with bayonet mechanism
Bulb not included in assembly.	
Voltage:	12-230 V
red	<b>800 100 00</b>
green	<b>800 200 00</b>
yellow	<b>800 300 00</b>
white	<b>800 400 00</b>
blue	<b>800 500 00</b>

## ❖ ACCESSORIES:

Bulb BA15d, 5 W total length 42 mm

Voltage:	12 V AC/DC	24 V AC/DC	30 V AC/DC	115 V AC/DC	230 V AC/DC
	<b>955 840 34</b>	<b>955 840 35</b>	<b>955 840 32</b>	<b>955 840 57</b>	<b>955 840 38</b>
Tube adaptor					<b>975 812 01</b>
Base with integrated tube, Ø 25 mm, 110 mm long, plastic					<b>975 840 10</b>
Base for tube mounting					<b>975 840 90</b>
Base for base mounting					<b>975 812 02</b>
Tube Ø 25 mm, all anodised aluminium					
100 mm long					<b>975 845 10</b>
250 mm long					<b>975 840 25</b>
400 mm long					<b>975 840 40</b>
Anti-twist device					<b>975 815 22</b>
Surface housing IP 65					
for 1 Installation Beacon					<b>975 815 03</b>
for 2 Installation Beacons					<b>975 815 07</b>
for 3 Installation Beacons					<b>975 815 08</b>
for 4 Installation Beacons					<b>975 109 05</b>

## ↔ TECHNICAL DIAGRAM:

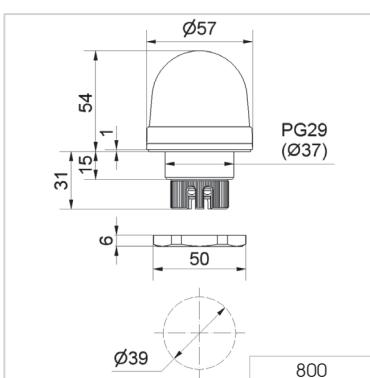

# 801 LED Installation Permanent Beacon - PG29 (Ø 37 mm)



Tube adaptor as accessory



Accessories

## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:


Dimensions (Ø x Height):	57 mm x 54 mm (Protrusion from panel)		
Housing:	PC/ABS-Blend		
	Socket: PA-GF, high impact		
Lens:	PC, transparent		
Fixing:	Installation mounting for Ø 37 mm (PG29)		
Connection:	Screw terminal 0.5 - 1.5 mm <sup>2</sup>		
Life duration:	Up to 100,000 hrs		
Voltage:	24 V AC/DC	115 V AC	230 V AC
Current consumption:	45 mA	25 mA	25 mA
red	<b>801 100 75</b>	<b>801 100 67</b>	<b>801 100 68</b>
green	<b>801 200 75</b>	<b>801 200 67</b>	<b>801 200 68</b>
yellow	<b>801 300 75</b>	<b>801 300 67</b>	<b>801 300 68</b>

Further colours and voltages on request.

## ☒ ACCESSORIES:

Tube adaptor	<b>975 812 01</b>
Base with integrated tube, Ø 25 mm, 110 mm long, plastic	<b>975 840 10</b>
Base for tube mounting	<b>975 840 90</b>
Base for base mounting	<b>975 812 02</b>
Tube Ø 25 mm, all anodised aluminium	
100 mm long	<b>975 845 10</b>
250 mm long	<b>975 840 25</b>
400 mm long	<b>975 840 40</b>
Anti-twist device	<b>975 815 22</b>
Surface housing IP 65	
for 1 Installation Beacon	<b>975 815 03</b>
for 2 Installation Beacons	<b>975 815 07</b>
for 3 Installation Beacons	<b>975 815 08</b>
for 4 Installation Beacons	<b>975 109 05</b>

## ↔ TECHNICAL DIAGRAM:

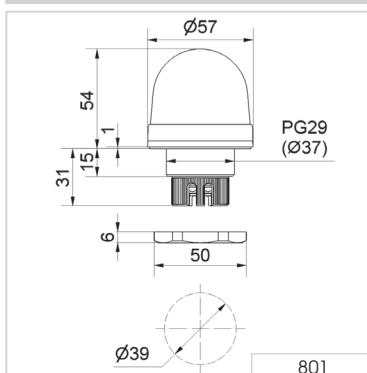

# 816 LED Beacon (Multicolour) with USB Interface - PG29 (Ø 37 mm)



Simple triggering as no special software is required

## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height):	75 mm x 66 mm (Protrusion from panel)
Housing:	ABS/PC-Blend, black
Lens:	PC, transparent
Fixing:	Shock resistance 20 Joules according to EN 60079-0 Installation mounting for Ø 37 mm (PG29) Base and wall mounting possible (accessories)
Connection:	Mini USB 2.0 downward cable outlet
Power supply:	Via USB
Colour options:	More than 200,000 colours (RGB LED)
Suitable for:	Windows®, System requirements – see Handbook
Assembly:	LED beacon, demo software, driver and USB connection cable included, 1.8 m long
Life duration:	Up to 50,000 hrs
Voltage:	5 V (USB-Connection)
Current consumption:	≤ 500 mA
clear lens	<b>816 480 53</b>


## ❖ ACCESSORIES:

You will find the appropriate accessories for base or tube mounting on page 104  
or under [www.weima.com](http://www.weima.com)

## ! ADDITIONAL INFORMATION:

The installation LED Beacon with USB interface is compatible with USB 2.0 and 1.1.  
A wide range of colours and light effects can be quickly and simply programmed by the  
customer and altered at any time.

## ↔ TECHNICAL DIAGRAM:

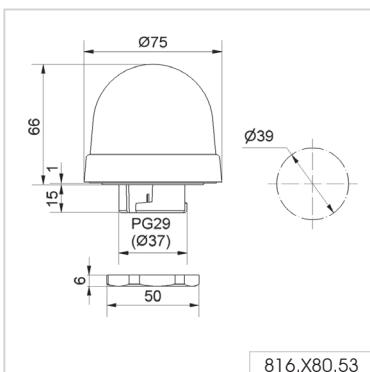

# EvoSIGNAL - LED Signal Beacon Mini, Midi, Maxi

## Your benefits

The type of optical signals used depends on the application and the surroundings. With EvoSIGNAL, finding the right signal device has never been so easy: Almost all areas of application are optimally covered by only three sizes (signal lamps) with specific mounting adapters. The new modular, simple and clear standard solution. EvoSIGNAL is one of a kind.

- Simple and easy to use: Number of different articles reduced to 20% whilst retaining a full range
- Twin functions: TwinLIGHT and TwinFLASH unite two light pattern functions in one element. They can be remote-controlled via connection terminals and also used as escalation levels
- Poka Yoke: Simple and intuitive installation - incorrect installation is impossible
- Mini and Midi also available as TriCOLOUR variants
- Maxi TwinFLASH can be used as an attention-grabbing alternative to xenon strobes and rotating mirror beacons

## Typical applications

Signal faults and statuses on machines and equipment, in building services engineering and in door and gate applications. All products are ideal for demanding indoor and outdoor applications.

- Mini – on installations with limited space
- Midi – signalling over medium distances (10–30 m)
- Maxi – signalling over long distances (> 20 m)



## Installation options

- Base mounting
- M22/PG29 single-hole mounting
- Tube mounting
- Bracket mounting

## Features

- Push-in connection terminals: Simple and permanently secure connection
- Fully compatible: Easy replacement of previous products
- Best-in-class equipment: Powerful, extremely robust (IP66), tamper-proof




Mini

Midi

Maxi



# EvoSIGNAL Mini - LED Signal Beacon

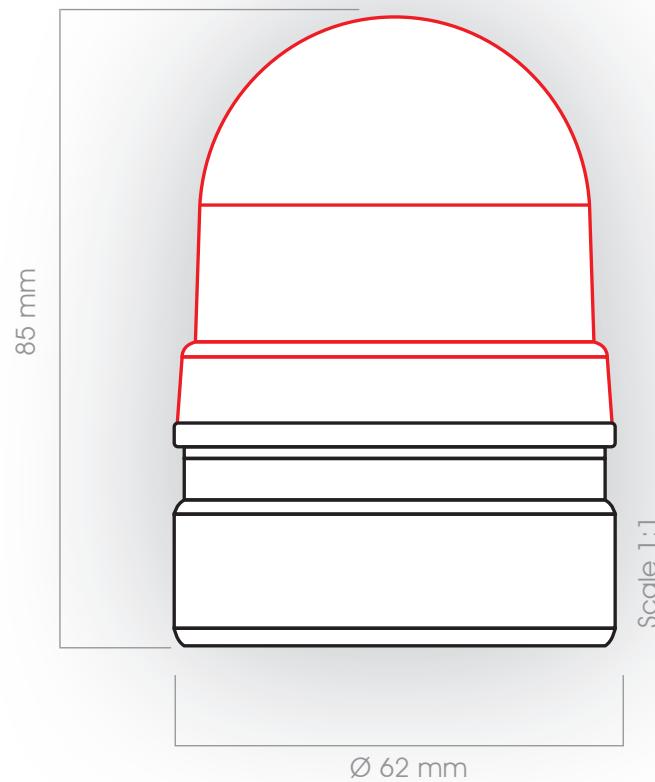

31  
TwinLIGHT, TwinFLASH,  
TriCOLOUR



6  
Mounting adapter

# Quick Finder EvoSIGNAL Mini - LED Signal Beacon



12 V AC/DC	
TwinLIGHT	TwinFLASH
Order no.	Order no.
260 110 74	260 120 74
260 210 74	260 220 74
260 310 74	260 320 74
260 410 74	260 420 74
260 510 74	260 520 74



24 V AC/DC	
TwinLIGHT	TwinFLASH
Order no.	Order no.
260 110 75	260 120 75
260 210 75	260 220 75
260 310 75	260 320 75
260 410 75	260 420 75
260 510 75	260 520 75



TriCOLOUR
260 430 75

## 115-230 V AC

115-230 V AC	
TwinLIGHT	TwinFLASH
Order no.	Order no.
260 110 60	260 120 60
260 210 60	260 220 60
260 310 60	260 320 60
260 410 60	260 420 60
260 510 60	260 520 60



## + Mounting adapter (compulsory!)

Base mounting



Order no.  
260 700 01

Installation mounting M22



Order no.  
260 700 03

Installation mounting PG 29



Order no.  
260 700 04

Tube mounting



Order no.  
260 700 05

Bracket mounting with cable gland









Order no.  
260 700 06

Bracket mounting



Order no.  
260 700 07





Tube mounting



Bracket mounting with cable gland

## EvoS/GNAL Mini - LED Signal Beacon



### ⓘ TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height):	62 mm x 85 mm		
Housing:	PC-ABS, grey, high impact		
Lens:	PC, transparent		
Fixing:	Base/Installation/Tube/Wall mounting		
Cable entry:	Cable diameter 8-12 mm		
Connection:	Push-In terminal max. 1.5 mm <sup>2</sup>		
Flash/Blink frequency:	1 Hz		
<b>TwinLIGHT (Permanent/Blinking)</b>			
Voltage:	12 V AC/DC	24 V AC/DC	115-230 V AC
Current consumption:	≤ 90 mA	≤ 75 mA	≤ 45 mA
red	<b>260 110 74</b>	<b>260 110 75</b>	<b>260 110 60</b>
green	<b>260 210 74</b>	<b>260 210 75</b>	<b>260 210 60</b>
yellow	<b>260 310 74</b>	<b>260 310 75</b>	<b>260 310 60</b>
white	<b>260 410 74</b>	<b>260 410 75</b>	<b>260 410 60</b>
blue	<b>260 510 74</b>	<b>260 510 75</b>	<b>260 510 60</b>
<b>TwinFLASH (Flash/EVS)</b>			
Voltage:	12 V AC/DC	24 V AC/DC	115-230 V AC
Current consumption:	≤ 70 mA	≤ 75 mA	≤ 45 mA
red	<b>260 120 74</b>	<b>260 120 75</b>	<b>260 120 60</b>
green	<b>260 220 74</b>	<b>260 220 75</b>	<b>260 220 60</b>
yellow	<b>260 320 74</b>	<b>260 320 75</b>	<b>260 320 60</b>
white	<b>260 420 74</b>	<b>260 420 75</b>	<b>260 420 60</b>
blue	<b>260 520 74</b>	<b>260 520 75</b>	<b>260 520 60</b>
<b>TriCOLOUR</b>			
Voltage:		24 V AC/DC	
Current consumption:		≤ 90 mA	
Order no.		<b>260 430 75</b>	


### ✎ ACCESSORIES (COMPULSORY!):

Base mounting	<b>260 700 01</b>
Installation mounting M22	<b>260 700 03</b>
Installation mounting PG 29	<b>260 700 04</b>
Tube mounting	<b>260 700 05</b>
Bracket mounting with cable gland	<b>260 700 06</b>
Bracket mounting	<b>260 700 07</b>

### ↔ TECHNICAL DIAGRAM:

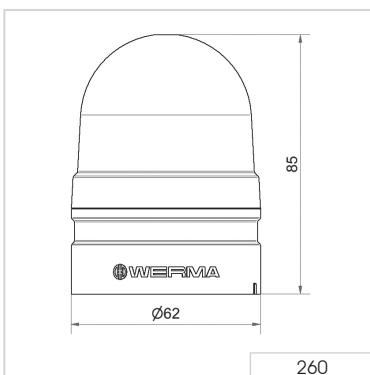

## EvoSIGNAL Midi - LED Signal Beacon

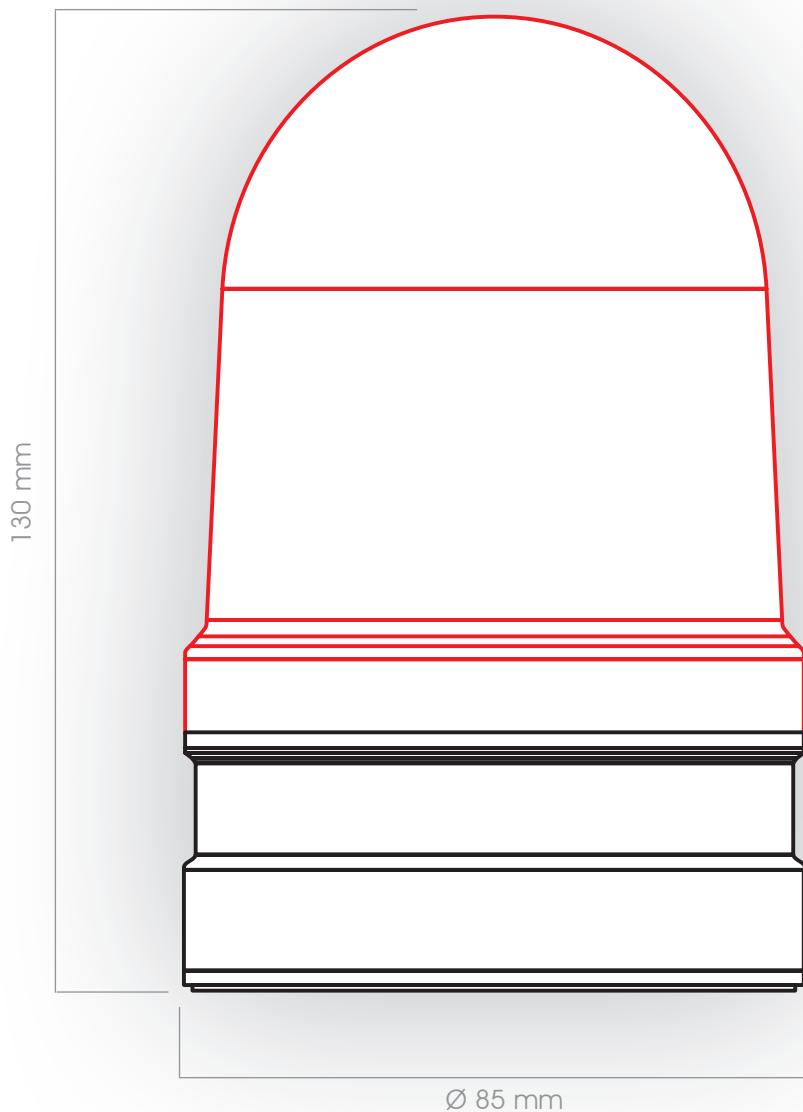

32  
TwinLIGHT, TwinFLASH,  
TriCOLOUR, Rotating Light



6  
Mounting adapter

# EvoSIGNAL Midi - LED Signal Beacon



## 12/24 V AC/DC



TwinLIGHT	TwinFLASH	Rotating
Order no.	Order no.	Order no.
261 110 70	261 120 70	261 140 70
261 210 70	261 220 70	261 240 70
261 310 70	261 320 70	261 340 70
261 410 70	261 420 70	261 440 70
261 510 70	261 520 70	261 540 70
<b>TriCOLOUR</b>		
261 430 70		

## 115-230 V AC

TwinLIGHT	TwinFLASH	Rotating
Order no.	Order no.	Order no.
261 110 60	261 120 60	261 140 60
261 210 60	261 220 60	261 240 60
261 310 60	261 320 60	261 340 60
261 410 60	261 420 60	261 440 60
261 510 60	261 520 60	261 540 60
<b>TriCOLOUR</b>		
261 430 60		

## + Mounting adapter (compulsory!)

Base mounting



Order no.  
261 700 01

Base mounting  
with cable gland



Order no.  
261 700 02

Tube mounting



Order no.  
261 700 05

Bracket mounting  
with cable gland



Order no.  
261 700 06

Bracket  
mounting




Order no.  
261 700 07


Horn




Order no.  
261 700 03




261




261.700.01




261.700.02




261.700.03



261.700.05



261.700.06



261.700.07

# EvoSIGNAL Midi - LED Signal Beacon



Bracket  
mounting



Tube mounting



## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height):	85 mm x 130 mm
Housing:	PC/ABS, grey, high impact
Lens:	PC, transparent
Fixing:	Base/Tube/Wall mounting
Cable entry:	Cable Diameter 8-12 mm
Connection:	Push-In terminal max. 1.5 mm <sup>2</sup>

### TwinLIGHT

Blinking/Flash frequency:	1 Hz	
Voltage:	12/24 V AC/DC	115-230 V AC
Current consumption:	≤ 185 mA	≤ 65 mA
red	<b>261 110 70</b>	<b>261 110 60</b>
green	<b>261 210 70</b>	<b>261 210 60</b>
yellow	<b>261 310 70</b>	<b>261 310 60</b>
white	<b>261 410 70</b>	<b>261 410 60</b>
blue	<b>261 510 70</b>	<b>261 510 60</b>

### TwinFLASH

Blinking/Flash frequency:	1 Hz	
Voltage:	12/24 V AC/DC	115-230 V AC
Current consumption:	≤ 850 mA	≤ 110 mA
red	<b>261 120 70</b>	<b>261 120 60</b>
green	<b>261 220 70</b>	<b>261 220 60</b>
yellow	<b>261 320 70</b>	<b>261 320 60</b>
white	<b>261 420 70</b>	<b>261 420 60</b>
blue	<b>261 520 70</b>	<b>261 520 60</b>

### Rotation

Rotation rate:	180 r.p.m.	
Voltage:	12/24 V AC/DC	115-230 V AC
Current consumption:	≤ 130 mA	≤ 110 mA
red	<b>261 140 70</b>	<b>261 140 60</b>
green	<b>261 240 70</b>	<b>261 240 60</b>
yellow	<b>261 340 70</b>	<b>261 340 60</b>
white	<b>261 440 70</b>	<b>261 440 60</b>
blue	<b>261 540 70</b>	<b>261 540 60</b>

### TriCOLOUR

Voltage:	12/24 V AC/DC	115-230 V AC
Current consumption:	≤ 145 mA	≤ 50 mA
clear	<b>261 430 70</b>	<b>261 430 60</b>


## ❖ ACCESSORIES:

Base mounting	<b>261 700 01</b>
Base mounting with cable gland	<b>261 700 02</b>
Tube mounting	<b>261 700 05</b>
Bracket mounting with cable gland	<b>261 700 06</b>
Bracket mounting	<b>261 700 07</b>
Horn	<b>261 700 03</b>

## ↔ TECHNICAL DIAGRAM:



# EvoSIGNAL Maxi - LED Signal Beacon

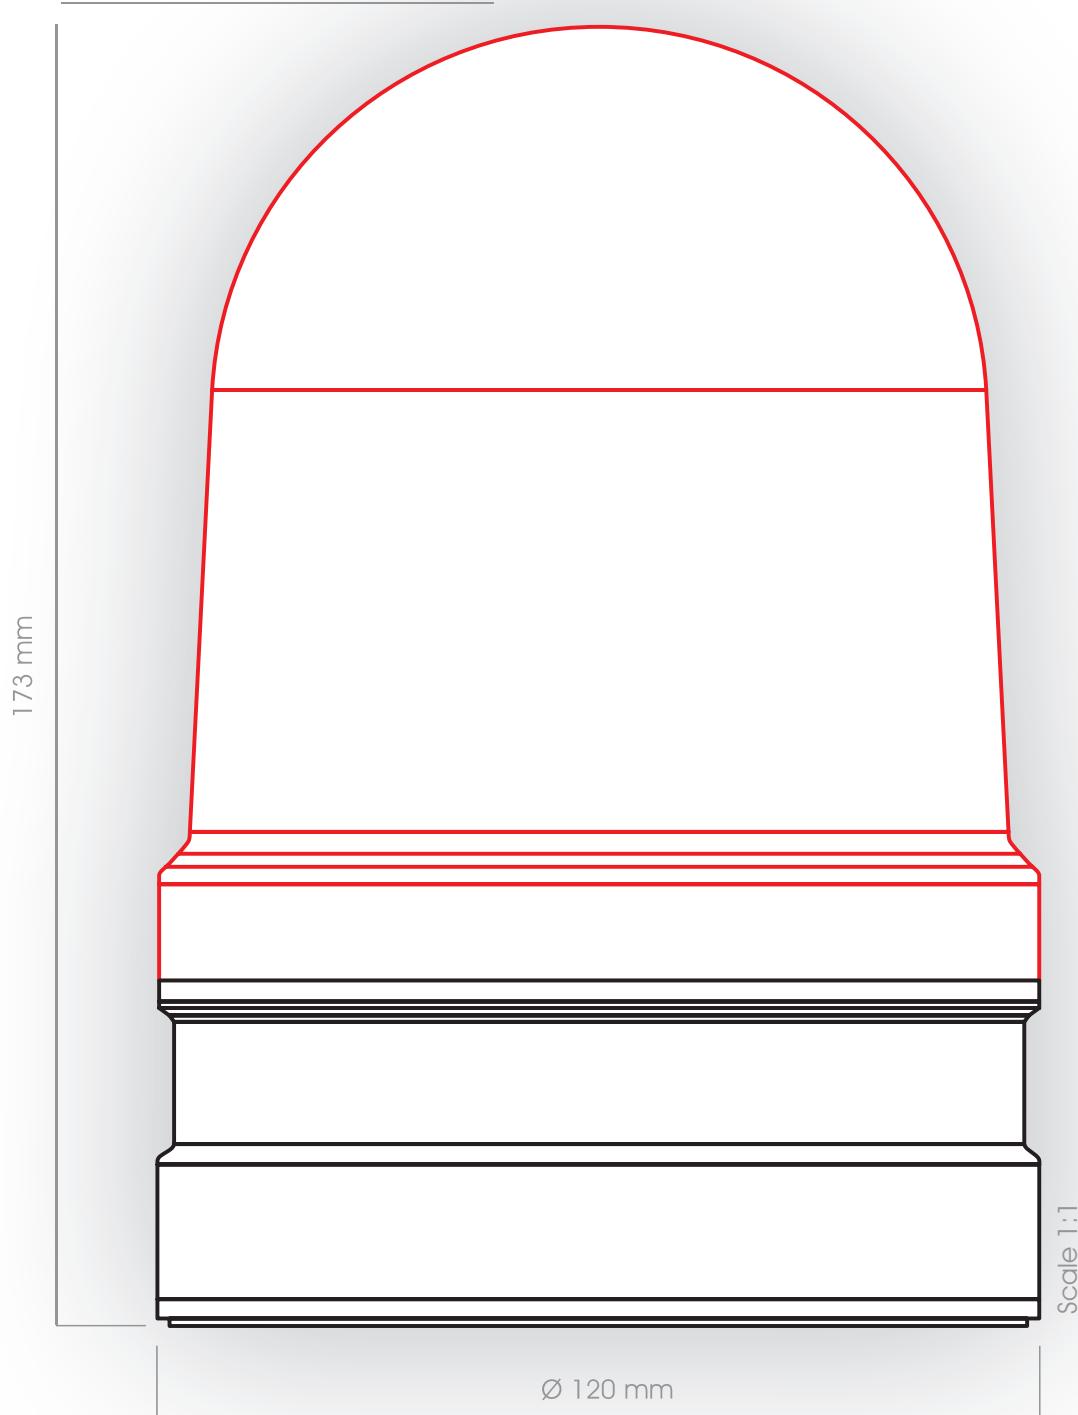

30  
TwinLIGHT, TwinFLASH,  
Rotating Light



4  
Mounting adapter

# Quick-Finder EvoS/GNAL Maxi - LED Signal Beacon



12/24 V AC/DC		
TwinLIGHT	TwinFLASH	Rotating
Order no.	Order no.	Order no.
262 110 70	262 120 70	262 140 70
262 210 70	262 220 70	262 240 70
262 310 70	262 320 70	262 340 70
262 410 70	262 420 70	262 440 70
262 510 70	262 520 70	262 540 70

115-230 V AC		
TwinLIGHT	TwinFLASH	Rotating
Order no.	Order no.	Order no.
262 110 60	262 120 60	262 140 60
262 210 60	262 220 60	262 240 60
262 310 60	262 320 60	262 340 60
262 410 60	262 420 60	262 440 60
262 510 60	262 520 60	262 540 60

## + Mounting adapter (compulsory!)



Order no.  
262 700 01




Order no.  
262 700 02




Order no.  
262 700 06




Order no.  
262 700 07




262.700.01



262.700.02



262.700.06



262.700.07





Bracket mounting with cable gland



Base mounting with cable exit at side

## EvoS/GNAL Maxi - LED Signal Beacon



### ⓘ TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height):	120 mm x 173 mm	
Housing:	PC/ABS	
Lens:	PC, transparent	
Fixing:	Base/Wall/Tube mounting	
Cable entry:	Cable Diameter 8-12 mm	
Connection:	Push-In terminal max. 1.5 mm <sup>2</sup>	
Rotation rate:	180 r.p.m.	
Flash/Blinking frequency:	1 Hz	
<b>TwinLIGHT</b>		
Voltage:	12/24 V AC/DC	115-230 V AC
Current consumption:	≤ 700 mA	≤ 165 mA
red	<b>262 110 70</b>	<b>262 110 60</b>
green	<b>262 210 70</b>	<b>262 210 60</b>
yellow	<b>262 310 70</b>	<b>262 310 60</b>
white	<b>262 410 70</b>	<b>262 410 60</b>
blue	<b>262 510 70</b>	<b>262 510 60</b>
<b>TwinFLASH</b>		
Voltage:	12/24 V AC/DC	115-230 V AC
Current consumption:	≤ 760 mA	≤ 165 mA
red	<b>262 120 70</b>	<b>262 120 60</b>
green	<b>262 220 70</b>	<b>262 220 60</b>
yellow	<b>262 320 70</b>	<b>262 320 60</b>
white	<b>262 420 70</b>	<b>262 420 60</b>
blue	<b>262 520 70</b>	<b>262 520 60</b>
<b>Rotating</b>		
Voltage:	12/24 V AC/DC	115-230 V AC
Current consumption:	≤ 550 mA	≤ 170 mA
red	<b>262 140 70</b>	<b>262 140 60</b>
green	<b>262 240 70</b>	<b>262 240 60</b>
yellow	<b>262 340 70</b>	<b>262 340 60</b>
white	<b>262 440 70</b>	<b>262 440 60</b>
blue	<b>262 540 70</b>	<b>262 540 60</b>

### ☒ ACCESSORIES:

Base mounting	<b>262 700 01</b>
Base mounting with cable exit at side	<b>262 700 02</b>
Bracket mounting with cable gland	<b>262 700 06</b>
Bracket mounting with concealed cable entry	<b>262 700 07</b>

### ↔ TECHNICAL DIAGRAM:

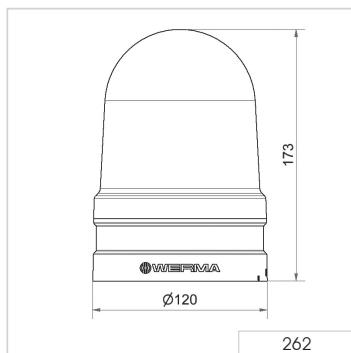

# Monitored / Monitorable Beacons for safety applications – 806 / 829 families

## Your benefits

For applications where safety is an issue, we recommend WERMA's monitored beacons. These beacons are certified by the TÜV Technical Inspection Agency and can be integrated into the safety assessment of your machinery/plant equipment in accordance with EN 13849-1 and EN 62061.

### 806 monitorable LED beacons:

- TÜV certified LED light that enables current monitoring

### 829 monitored LED beacons:

- Built-in monitoring electronics with two potential-free outputs; the light thus achieves PL e as per EN 13849-1 and safety category 4
- Approval confirmed by TÜV certificate
- Maintenance-free LED technology

### 826 monitored beacons:

- Built-in monitoring electronics with two potential-free outputs; the light thus achieves PL e as per EN 13849-1 and safety category 4
- Approval confirmed with a TÜV certificate

## Typical applications

Signalling of faults in applications where safety is an issue

- on machinery and plant equipment
- in building service industry

## Installation options

- Base mounting
- Bracket mounting with accessories
- Wire guard accessory to protect against mechanical damage

## Features

- Further safety-related products are available on request



Size comparison 806 / 826+829 / EvoSIGNAL Maxi





Bracket (accessory)



Accessories

## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height):	70 mm x 97 mm
Housing:	Terminal element: PA-GF, high impact Cap: PC
Lens:	PC, transparent
Fixing:	Base mounting, Bracket mounting
Cable entry:	Cable diameter max. 14 mm
Connection:	CAGE CLAMP® technology max. 2.5 mm <sup>2</sup>
Duty cycle:	100 %
Current consumption following failure of 3 of the 6 strips:	< 5 mA
Life duration:	Up to 100,000 hrs
Voltage:	24 V DC
Current consumption:	60 mA
yellow	<b>806 350 55</b>
clear	<b>806 450 55</b>

## ❖ ACCESSORIES:



Bracket, including cable gland	<b>960 000 02</b>
Bracket for 1-sided mounting	<b>975 840 85</b>

## ! ADDITIONAL INFORMATION:


### What does Muting mean?

Muting is the temporary automatic overriding of a safety protection device by means of a control system within the normal operating cycle of a machine. This bridging of the safety protection must be visually displayed in order to prevent staff mistakenly entering a dangerous area.

It is therefore necessary that the signal beacon in such applications can be triggered by failsafe technology and the bulb function can be monitored. The standard colour for muting signalisation is clear; yellow is however also permitted.

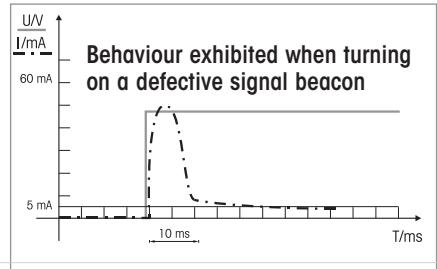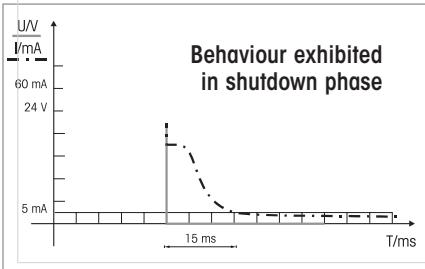

## ↔ TECHNICAL DIAGRAM:




# 829 Monitored LED Permanent Beacon



Monitored Permanent Beacon  
with long life, maintenance-free  
LED technology



Bracket (accessory)




## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height):	98 mm x 137 mm
Housing:	PC/ABS-Blend
Lens:	PC, transparent
Fixing:	Base, bracket and tube mounting. Base 975 840 90 must be ordered twice for tube mounting - once as socket for beacon and once as base
Cable entry:	Cable diameter 5-7 mm
Connection:	Screw terminal with wire protection 0.5-1.5 mm <sup>2</sup>
Installation position:	Vertical
Cable outlet:	Downwards
Duty cycle:	100 %
Rated voltage:	24 V DC
Input power 24 V DC:	c. 3.5 W
Output current capability:	30 V DC / 100 mA
On state resistance of an output:	Max. 25 Ω
Atmospheric humidity:	≤ 95 % without moisture condensation
Response time, normal operation and with LED failure:	1 ms to 5 ms
in fault cases with safety release:	< 1 s (with short-circuit current ≥ 1 A)
Certification:	EN ISO 13849-1:2008 category 4, Performance Level "e" EN ISO 13849-2:2008 validation
Life duration:	Up to 50,000 hrs
Voltage:	24 V DC
Current consumption:	≤ 150 mA
red	<b>829 170 55</b>
yellow	<b>829 370 55</b>
clear	<b>829 470 55</b>

## ❖ ACCESSORIES:

Bracket	<b>975 826 05</b>
---------	-------------------

## ! ADDITIONAL INFORMATION:

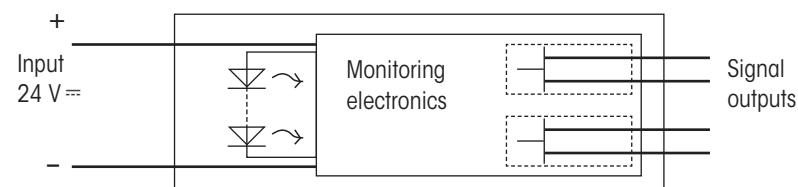

### Function

The device is equipped with monitoring electronics which signal the current flow of the beacon back to two electrically isolated, potential-free semiconductor outputs A and B (outputs closed).

If the beacon has not been actuated, both outputs are open. In case of a fault at least one output is opened.

## ↔ TECHNICAL DIAGRAM:





# LED Maxi Beacons – 883/884/885 families

## Your benefits

WERMA's Maxi Beacons give flexible signalling over larger distances. The IP65 rated units are ideally suited for use in both indoor and outdoor applications.

### 838 xenon double flash:

- Very bright, even in direct sunlight and over longer distances

### 883/884 rotating mirror beacons:

- High intensity light and robust housing
- Easy to connect, without removing the mechanical assembly

## Typical applications

Signalling faults and relaying alarms

- In building technology
- For door and gate systems
- On machinery and plant equipment, over long distances

## Installation options

- Base mounting
- Tube mounting
- Bracket mounting

## Features

- Tamper-proof and shock-resistant up to 20 joules
- Optional wire guard to protect against mechanical damage

### 883/884 rotating mirror beacons:

- Quiet, with low-wear wheel and disc drive

### 884 revolving beacon:

- Special Fresnel lenses produce beams of light that can be seen over longer distances even in poor light conditions



# 883 Rotating Mirror Beacon



Bracket (accessory)



Plastic bracket, adaptor for tube  
mounting and wire guard  
(accessories)

## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:


Dimensions (Ø x Height):	142 mm x 218 mm	
Housing:	PC/ABS	
Lens:	PC, transparent	
Fixing:	Base mounting, bracket mounting, tube mounting (accessory)	
Cable entry:	Cable diameter 5-7 mm	
Connection:	Screw terminal 0.5 -1.5 mm <sup>2</sup>	
Drive:	Wheel and disc drive, motor in centre of gravity	
Mirror rotation rate:	180 r.p.m.	
Life duration LED:	> 50,000 hrs	
Service life of drive:	> 5,000 hrs	
Duty cycle:	100 %	
Voltage:	24 V AC/DC	115 -230 V AC
Current consumption:	250 mA	95 mA
red	<b>883 130 75</b>	<b>883 130 60</b>
green	<b>883 230 75</b>	<b>883 230 60</b>
yellow	<b>883 330 75</b>	<b>883 330 60</b>
blue	<b>883 530 75</b>	<b>883 530 60</b>

Further colours and voltages on request.

## ❖ ACCESSORIES:

Plastic bracket for wall mounting	<b>975 883 06</b>
Adaptor for tube mounting	<b>975 883 09</b>
Base for tube mounting	<b>975 840 91</b>
Tube, Ø 25 mm, 100 mm long	<b>975 845 10</b>
Tube, Ø 25 mm, 250 mm long	<b>975 840 25</b>
Wire guard, only for base mounting	<b>975 883 08</b>

## ↔ TECHNICAL DIAGRAM:

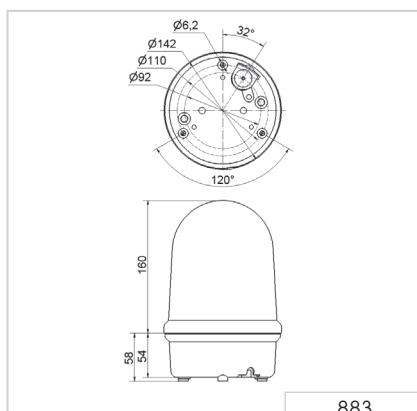

883





## 885 Rotating Mirror Beacon

### ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Housing:	PC/ABS
Lens:	PC, transparent
Connection:	Screw terminal max. 1.5 mm <sup>2</sup>
Cable entry:	Cable diameter 5-7 mm
Installation position:	Standing, Tube mounting if required
Mirror rotation rate:	c. 180 r.p.m.
Life duration LED:	> 50,000 hrs
Service life of drive:	> 5,000 hrs
Duty cycle:	100 %

#### Base/Bracket mounting

Dimensions (Ø x Height):	98 mm x 151 mm
Voltage:	24 V AC/DC
Current consumption:	175 mA
red	<b>885 130 75</b>
green	<b>885 230 75</b>
yellow	<b>885 330 75</b>
blue	<b>885 530 75</b>
115-230 V AC	65 mA
<b>885 130 60</b>	<b>885 230 60</b>
<b>885 330 60</b>	<b>885 530 60</b>


#### Tube mounting

Dimensions (Ø x Height):	98 mm x 200 mm
Voltage:	24 V AC/DC
Current consumption:	175 mA
red	<b>885 140 75</b>
green	<b>885 240 75</b>
yellow	<b>885 340 75</b>
blue	<b>885 540 75</b>
115-230 V AC	65 mA
<b>885 140 60</b>	<b>885 240 60</b>
<b>885 340 60</b>	<b>885 540 60</b>

### ❖ ACCESSORIES:

Plastic bracket for wall mounting	<b>975 826 05</b>
Wire guard, galvanised, only for base mounting	<b>975 826 03</b>
Tube Ø 25 mm, all anodised aluminium	
100 mm long	<b>975 845 10</b>
250 mm long	<b>975 840 25</b>
Base for tube mounting, plastic, Ø 25 mm	<b>975 840 90</b>
Base for tube mounting, metal, Ø 25 mm	<b>975 840 91</b>

### ↔ SCHÉMAS:

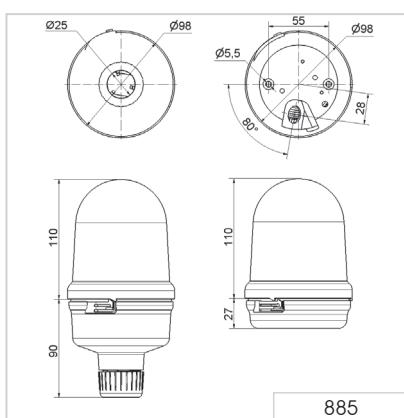

# 884 Revolving Signal Beacon



Bracket  
(accessory)



Plastic bracket, adaptor for tube  
mounting and wire guard  
(accessories)

## ⓘ TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:


Dimensions (Ø x Height):	142 mm x 218 mm	
Housing:	PC/ABS	
Lens:	PC, transparent	
Fixing:	Base mounting, bracket mounting, tube mounting (accessory)	
Cable entry:	Cable diameter 5-8 mm	
Connection:	Screw terminal 0.5 - 1.5 mm <sup>2</sup>	
Drive:	Wheel and disc drive, motor in centre of gravity	
Mirror rotation rate:	60 r.p.m.	
Life duration LED:	> 50,000 hrs	
Service life of drive:	> 5,000 hrs	
Duty cycle:	100 %	
Voltage:	24 V AC/DC	115-230 V AC
Current consumption:	250 mA	95 mA
red	<b>884 130 75</b>	<b>884 130 60</b>
green	<b>884 230 75</b>	<b>884 230 60</b>
yellow	<b>884 330 75</b>	<b>884 330 60</b>
blue	<b>884 530 75</b>	<b>884 530 60</b>

Further colours and voltages on request.

## ☒ ACCESSORIES:

Plastic bracket for wall mounting	<b>975 883 06</b>
Adaptor for tube mounting	<b>975 883 09</b>
Base for tube mounting	<b>975 840 91</b>
Tube, Ø 25 mm, 100 mm long	<b>975 845 10</b>
Tube, Ø 25 mm, 250 mm long	<b>975 840 25</b>
Wire guard, only for base mounting	<b>975 883 08</b>

## ↔ TECHNICAL DIAGRAM:

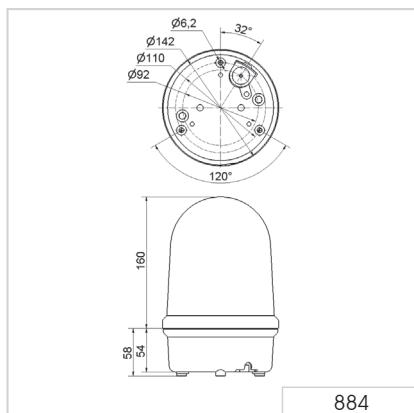



Bracket mounting



Tube mounting



## EvoS/GNAL Midi - LED Signal Beacon

### ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height):	85 mm x 130 mm
Housing:	PC/ABS, grey, high impact
Lens:	PC, transparent
Fixing:	Base/Tube/Wall mounting
Cable entry:	Cable Diameter 8-12 mm
Connection:	Push-In terminal max. 1.5 mm <sup>2</sup>


#### Rotation

Rotation rate:	180 r.p.m.	
Voltage:	12/24 V AC/DC	115-230 V AC
Current consumption:	≤ 130 mA	≤ 110 mA
red	<b>261 140 70</b>	<b>261 140 60</b>
green	<b>261 240 70</b>	<b>261 240 60</b>
yellow	<b>261 340 70</b>	<b>261 340 60</b>
white	<b>261 440 70</b>	<b>261 440 60</b>
blue	<b>261 540 70</b>	<b>261 540 60</b>


### ❖ ACCESSORIES:

Base mounting	<b>261 700 01</b>
Base mounting with cable gland	<b>261 700 02</b>
Tube mounting	<b>261 700 05</b>
Bracket mounting with cable gland	<b>261 700 06</b>
Bracket mounting	<b>261 700 07</b>
Horn	<b>261 700 03</b>


### ↔ TECHNICAL DIAGRAM:




261




261.700.01




261.700.02




261.700.03




261.700.05



261.700.06



261.700.07



# EvoS/GNAL Maxi - LED Signal Beacon



Bracket mounting with cable gland



Base mounting with cable exit at side

## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height):	120 mm x 173 mm
Housing:	PC/ABS
Lens:	PC, transparent
Fixing:	Base/Wall/Tube mounting
Cable entry:	Cable Diameter 8-12 mm
Connection:	Push-In terminal max. 1.5 mm <sup>2</sup>
Rotation rate:	180 r.p.m.
Flash/Blinking frequency:	1 Hz






### Rotating

Voltage:	12/24 V AC/DC	115-230 V AC
Current consumption:	≤ 550 mA	≤ 170 mA
red	<b>262 140 70</b>	<b>262 140 60</b>
green	<b>262 240 70</b>	<b>262 240 60</b>
yellow	<b>262 340 70</b>	<b>262 340 60</b>
white	<b>262 440 70</b>	<b>262 440 60</b>
blue	<b>262 540 70</b>	<b>262 540 60</b>

## ❖ ACCESSORIES:

Base mounting	<b>262 700 01</b>
Base mounting with cable exit at side	<b>262 700 02</b>
Bracket mounting with cable gland	<b>262 700 06</b>
Bracket mounting with concealed cable entry	<b>262 700 07</b>

## ↔ TECHNICAL DIAGRAM:





## Why do obstacles need to be illuminated?

The law stipulates that buildings of a specific height and in the vicinity of airports as well as factory chimneys, towers, masts etc. must be equipped with obstruction lights.

This special lighting makes obstacles visible for pilots in the dark or when visibility is poor. Obstruction lighting is one of the most important aspects of flight safety.

## What directives and regulations are there?

The method of marking obstacles to air traffic is laid down by diverse laws, regulations and recommendations. These regulations have a clearly defined sphere of influence and are **internationally interlinked**.

The International Civil Aviation Organisation (**ICAO**) is a special organisation within the United Nations created to establish and develop universal regulations for safety, continuity and economic efficiency in international air traffic. The recommendations of the ICAO are not directly binding in the member states, but must be transformed by them into the appropriate **national legal regulations**.

In **Germany** the Ministry for Transport and Construction Development (**BMVBS**) issues the regulations covering obstruction lighting on buildings. The **ICAO** regulations regarding the methods of marking and lighting aviation obstacles can be found in ICAO Annex 14.

- **"Low intensity obstacle beacon type A"**: a red permanent night-time warning beacon for fixed obstructions with a brightness of 10 cd.
- **"Low intensity obstacle beacon type B"**: a red permanent night-time warning beacon for fixed obstructions with a brightness of 32 cd.

## Where are obstacle lights deployed?



- **Germany**: Marking of aviation obstacles by night at any height providing the highest point of the obstacle can be marked.
- **According to ICAO**: Marking of aviation obstacles by night up to 45 m ("Low-intensity Obstacle Light, Type A"), additionally in combination with "medium-intensity obstacle lights"





# 280 Low-intensity LED Obstruction Light Type A and B



LED Obstruction Light Type B



LED Obstruction Light Type A - The adaptor (accessory) allows quick and simple mounting on a tube



Plastic bracket, adaptor for tube mounting (accessories)

## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height):	142 mm x 218 mm
Housing:	PC/ABS-Blend
Lens:	PC, transparent, clear
Connection:	Screw terminal 0.5 - 1.5 mm <sup>2</sup>
Cable entry:	Cable diameter 5-7 mm
Fixing:	Base mounting, bracket mounting (accessory), tube mounting (accessory)
Duty cycle:	100 %
Life duration:	Up to 50,000 hrs
Current consumption at failure of 2 of the 12 LED strips:	< 50mA

### Low-intensity LED Obstruction Light Type A

<b>Voltage:</b>	12-50 V DC		
<b>Current consumption:</b>	500-100 mA		
aviation red	<b>280 410 55</b>		


### Low-intensity LED Obstruction Light Type B (includes Type A)

<b>Voltage:</b>	24 V DC	230 V AC	230 V AC (monitorable)
<b>Current consumption:</b>	~ 500 mA	~ 200 mA	~ 200 mA / < 50 mA (Failure mode)
aviation red	<b>280 470 55</b>	<b>280 470 68</b>	<b>280 480 68</b>

## ❖ ACCESSORIES:

Plastic bracket for wall mounting	<b>975 883 06</b>
Wire guard, only for base mounting	<b>975 883 08</b>
Adaptor for tube mounting	<b>975 883 09</b>

## ↔ TECHNICAL DIAGRAM:

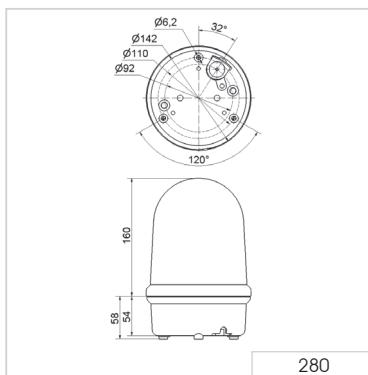



LED Obstruction Light Type B



LED Obstruction Light Type A



## 281 Low-intensity LED Obstruction Light Type A and B

### ⓘ TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height):	165 mm x 205 mm
Housing:	Aluminium, coloured powder coating
Lens:	Reinforced borosilicate glass
Connection:	Screw terminal 0.5 - 1.5 mm <sup>2</sup>
Cable entry:	Cable gland M25 x 1.5 mm (included in assembly), Cable diameter 9-17 mm Reducer unit (included in assembly)
Fixing:	Base mounting, tube mounting M25 (no accessory required)
Life duration:	Up to 50,000 hrs



### Low-intensity LED Obstruction Light Type A

Voltage:	12-50 V DC		
Current consumption:	500-100 mA		
aviation red	<b>281 410 55</b>		

### Low-intensity LED Obstruction Light Type B (includes Type A)

Voltage:	24 V DC	230 V AC	230 V AC (monitorable)
Current consumption:	~ 500 mA	~ 200 mA	~ 200 mA / < 50 mA (Failure mode)
aviation red	<b>281 470 55</b>	<b>281 470 68</b>	<b>281 480 68</b>

### ↔ TECHNICAL DIAGRAM:

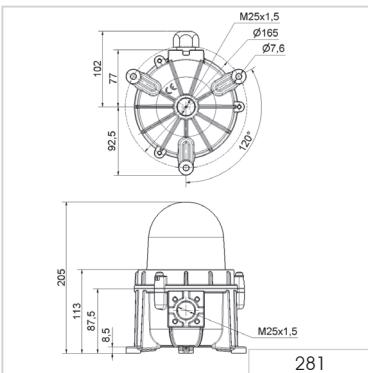

# Heavy-Duty Beacons - 839



## Your benefits

The heavy-duty beacons have the advantage of a robust and seawater-resistant aluminium housing unit in conjunction with a shock-resistant wire guard. These products are therefore especially suitable for use in harsh environments, locations exposed to seawater, or situations where excellent shock resistance is required.

- Maintenance-free operation permits use in locations where access is difficult
- Optimum protection against even severe mechanical strain or exposure to seawater

## Typical applications

Signalling faults and relaying alarms

- In outdoor and indoor areas under extreme conditions
- For maritime applications on ships or in harbour areas

## Installation options

- Base mounting
- Bracket mounting

## Features

- Special screwed cable gland for equalising the pressure in the housing with the environmental pressure
- IP66 / 67 for use in harsh conditions



Size comparison EvoSIGNAL Midi/EvoSIGNAL Maxi/Heavy Duty





## 839 LED Permanent Beacon



### ⓘ TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height):	153 mm x 189 mm	
Housing:	Black coated aluminium with integral wire guard	
Lens:	PC, transparent	
Fixing:	Base mounting, Bracket mounting (accessory)	
Connection:	Screw terminal 0.5 - 1.5 mm <sup>2</sup>	
Cable entry:	Cable gland M20 x 1.5 mm (included in assembly) Cable diameter 6-13 mm	
Installation position:	As required	
Life duration:	Up to 50,000 hrs	
Voltage:	12-50 V DC	230 V AC
Current consumption:	500-100 mA	50 mA
red	<b>839 100 55</b>	<b>839 100 68</b>
yellow	<b>839 300 55</b>	<b>839 300 68</b>

### ⚡ ACCESSORIES:

Mounting bracket	<b>975 839 02</b>
------------------	-------------------

### ↔ TECHNICAL DIAGRAM:

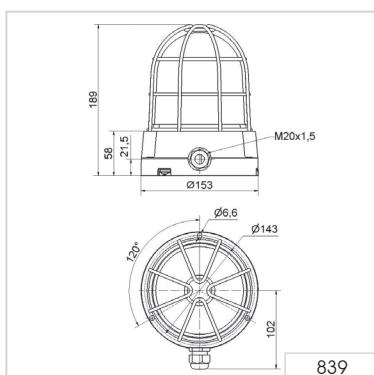

## 839 LED Rotating Beacon



### ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height):	153 mm x 189 mm	
Housing:	Black coated aluminium with integral wire guard	
Lens:	PC, transparent	
Fixing:	Base mounting, Bracket mounting (accessory)	
Connection:	Screw terminal 0.5 -1.5 mm <sup>2</sup>	
Cable entry:	Cable gland M20 x 1.5 mm (included in assembly) Cable diameter 6-13 mm	
Installation position:	As required	
Rotation rate:	c. 180 r.p.m.	
Life duration:	Up to 50,000 hrs	
Voltage:	24 V DC	115-230 V AC
Current consumption:	150 mA	70-180 mA
red	<b>839 120 55</b>	<b>839 120 68</b>
yellow	<b>839 320 55</b>	<b>839 320 68</b>




Mounting bracket  
(accessory)

### ❖ ACCESSORIES:

Mounting bracket	<b>975 839 02</b>
------------------	-------------------

### ↔ TECHNICAL DIAGRAM:

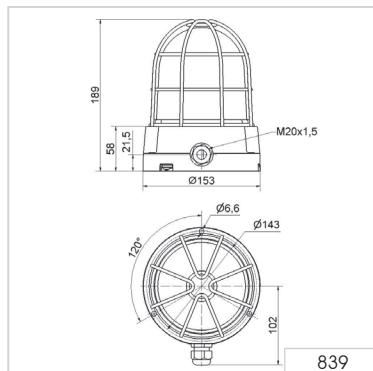



# FlexSQUARE – Square shaped beacons

## Your benefits

The compact 853 LED beacon is particularly versatile. With an IP67 protection rating, it is suitable for all indoor and outdoor applications, even in harsh environmental conditions.

- Powerful high-output, forward-directed light effect
- Clearly visible, also from the side
- Easy mounting and electrical installation thanks to the elastic, self-sealing, membranes or optional M20 cable gland for mounting on different sides
- Many combinations possible (traffic lights, for example)
- Where space is restricted: Multi-coloured version available, with up to seven colours

### 153 multi-tone siren:

- Loud audible signal to complement 853 beacon or as a stand-alone product
- Eight signal tones to choose from and a signal escalation option using three different externally triggerable tones

## Typical applications

Signalling of faults

- In lift and hoist systems (48 V)
- In building technology

## Installation options

- Wall mounting
- Base mounting

## Features

- Signal escalation possible with LED permanent light, LED double flash and EVS light in different colours
- Wide range of light effects and voltage options (12V, 24V, 48V and 115-230V)
- With the multi-coloured version, the three basic colours red, yellow and green can be activated with just two PLC outputs. With a third output, a further four colours are available

### 153 multi-tone siren:


- The sound output can be adjusted remotely

### Size comparison

EvoS/GNAL Mini/FlexSQUARE/EvoS/GNAL Maxi



# 853 LED Permanent Beacon



LED Permanent Light multicolour: 7 colours in one beacon: red, yellow, green, clear, blue, violet, turquoise

## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (L x H x W):	85 mm x 85 mm x 72 mm			
Housing:	PP-GF, black			
Lens:	PC, transparent			
Connection:	Screw terminal 0.5 - 1.5 mm <sup>2</sup> CAGE CLAMP® 0.5 to 1.5 mm <sup>2</sup> (Multicolour, RGY)			
Fixing:	Wall, base and ceiling mounting			
Possible colours:	Red, yellow, green, white, blue, violet, turquoise (multicolour)			
Equipment:	Elastic self-sealing membranes for cable entry without tools Eight integrated M20 threads, no nuts required Optional use of a cable gland, thread length of cable gland ≤ 9 mm (accessory)			
Assembly:	Incl. snap-on fixing bracket (optional use)			
Life duration:	Up to 50,000 hrs			

### LED Permanent Beacon

Voltage:	12 V DC	24 V DC	48 V AC	115-230 V AC
Current consumption:	< 180 mA	< 80 mA	< 35 mA	< 40 mA
red	<b>853 100 54</b>	<b>853 100 55</b>	<b>853 100 66</b>	<b>853 100 60</b>
green	<b>853 200 54</b>	<b>853 200 55</b>	<b>853 200 66</b>	<b>853 200 60</b>
yellow	<b>853 300 54</b>	<b>853 300 55</b>	<b>853 300 66</b>	<b>853 300 60</b>
clear	<b>853 400 54</b>	<b>853 400 55</b>	<b>853 400 66</b>	<b>853 400 60</b>
blue	<b>853 500 54</b>	<b>853 500 55</b>	<b>853 500 66</b>	<b>853 500 60</b>


### LED Permanent Beacon (multicolour)

Voltage:	24 V DC	115-230 V AC
Current consumption:	< 150 mA	< 35 mA
Multicolour	<b>853 480 55</b>	-
RGY (red, green, yellow)	-	<b>853 480 60</b>


## ❖ ACCESSORIES:

Connector for traffic light combinations	<b>975 853 01</b>
Cable gland M20 x 1.5 mm, 8mm thread length	<b>975 853 02</b>

## ↔ TECHNICAL DIAGRAM:

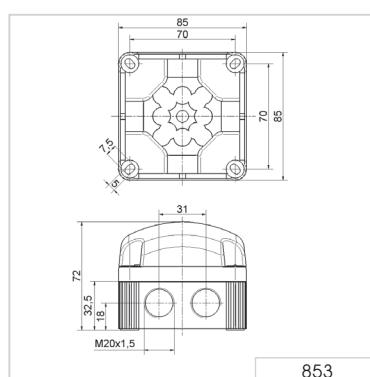

853



24 V



Intense double flash effect  
with low power consumption

## 853 LED Double Flash Beacon


### ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (L x H x W):	85 mm x 85 mm x 72 mm			
Housing:	PP-GF, black			
Lens:	PC, transparent			
Connection:	Screw terminal 0.5 - 1.5 mm <sup>2</sup>			
Fixing:	Wall, base and ceiling mounting			
Equipment:	Elastic self-sealing membranes for cable entry without tools Eight integrated M20 threads, no nuts required Optional use of a cable gland, thread length of cable gland ≤ 9 mm (accessory)			
Assembly:	Incl. snap-on fixing bracket (optional use)			
Life duration:	Up to 50,000 hrs			
Voltage:	12 V DC	24 V DC	48 V AC	115-230 V AC
Current consumption:	< 100 mA	< 80 mA	< 95 mA	< 180 mA
red	<b>853 110 54</b>	<b>853 110 55</b>	<b>853 110 66</b>	<b>853 110 60</b>
green	<b>853 210 54</b>	<b>853 210 55</b>	<b>853 210 66</b>	<b>853 210 60</b>
yellow	<b>853 310 54</b>	<b>853 310 55</b>	<b>853 310 66</b>	<b>853 310 60</b>
clear	<b>853 410 54</b>	<b>853 410 55</b>	<b>853 410 66</b>	<b>853 410 60</b>
blue	<b>853 510 54</b>	<b>853 510 55</b>	<b>853 510 66</b>	<b>853 510 60</b>

### ❖ ACCESSORIES:

Connector for traffic light combinations	<b>975 853 01</b>
Cable gland M20 x 1.5 mm, 8mm thread length	<b>975 853 02</b>

### ↔ TECHNICAL DIAGRAM:

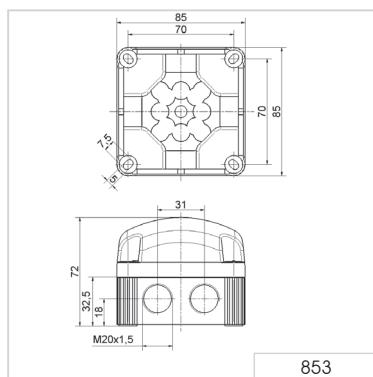

## 853 LED EVS Beacon



The innovative connector (accessory) enables traffic light combinations to be created in a matter of seconds



The "EVS" light signal ensures a maximum attention-grabbing effect.


## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (L x H x W):	85 mm x 85 mm x 72 mm			
Housing:	PP-GF, black			
Lens:	PC, transparent			
Connection:	Screw terminal 0.5 - 1.5 mm <sup>2</sup>			
Cable entry:	Cable diameter max. 8 mm, optional cable gland M20 (accessory)			
Fixing:	Wall, base and ceiling mounting			
Equipment:	Elastic self-sealing membranes for cable entry without tools Eight integrated M20 threads, no nuts required Optional use of a cable gland, thread length of cable gland ≤ 9 mm (accessory)			
Assembly:	Incl. snap-on fixing bracket (optional use)			
Life duration:	Up to 50,000 hrs			
Voltage:	12 V DC	24 V DC	48 V AC	115-230 V AC
Current consumption:	< 400 mA	< 200 mA	< 95 mA	< 160 mA
red	<b>853 120 54</b>	<b>853 120 55</b>	<b>853 120 66</b>	<b>853 120 60</b>
green	<b>853 220 54</b>	<b>853 220 55</b>	<b>853 220 66</b>	<b>853 220 60</b>
yellow	<b>853 320 54</b>	<b>853 320 55</b>	<b>853 320 66</b>	<b>853 320 60</b>
clear	<b>853 420 54</b>	<b>853 420 55</b>	<b>853 420 66</b>	<b>853 420 60</b>
blue	<b>853 520 54</b>	<b>853 520 55</b>	<b>853 520 66</b>	<b>853 520 60</b>

## ACCESSORIES:


Connector for traffic light combinations	<b>975 853 01</b>
Cable gland M20 x 1.5 mm, 8mm thread length	<b>975 853 02</b>

## ↔ TECHNICAL DIAGRAM:

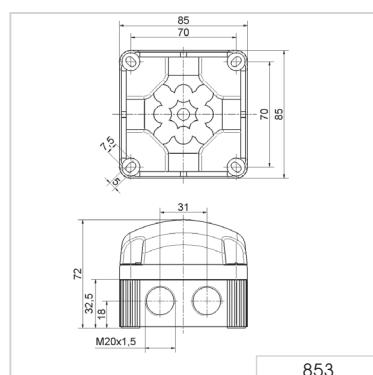



The innovative connector (accessory) enables traffic light combinations to be created in a matter of seconds



Three highly visible light effects are available



The LED beacon can be used with the sounder

## 853 LED Traffic Light


### ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (L x H x W):	85 mm x 85 mm x 72 mm
Housing:	PP-GF, black
Lens:	PC, transparent
Connection:	Screw terminal 0.5 - 1.5 mm <sup>2</sup> CAGE CLAMP® 0.5 - 1.5 mm <sup>2</sup> (Multicolour, RGY)
Fixing:	Wall, base and ceiling mounting
Possible colours:	Red, green, yellow, clear, blue
Operating voltage:	12 V DC, 24 V DC, 115-230 V AC
Current consumption:	Max. 80 mA at 24 V (LED Permanent Beacon) Max. 80 mA at 24 V (LED Double Flash Beacon) Max. 200 mA at 24 V (LED EVS Beacon) Max. 150 mA at 24 V (Multicolour)
Equipment:	Eight self-sealing membranes for cable entry without tools Eight integrated M20 threads, no nuts required Optional use of a cable gland, thread length of cable gland ≤ 9 mm (accessory)
Assembly:	Incl. snap-on fixing bracket (optional use)
Life duration:	Up to 50,000 hrs
LED Permanent Beacon 853	<a href="#">see page 139</a>
LED Permanent Beacon 853 (multicolour)	<a href="#">see page 139</a>
LED Permanent Beacon 853 (RGY)	<a href="#">see page 139</a>
LED Double Flash Beacon 853	<a href="#">see page 140</a>
LED EVS Beacon 853	<a href="#">see page 141</a>
Sounder 153	<a href="#">see next page</a>

### ❖ ACCESSORIES:

Connector for traffic light combinations	<b>975 853 01</b>
Cable gland M20 x 1.5 mm, 8mm thread length	<b>975 853 02</b>

### ↔ TECHNICAL DIAGRAM:

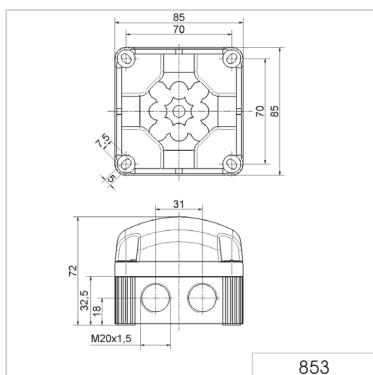

# 853/153 Sounder/ LED Beacon Combination



The innovative connector (accessory) enables traffic light combinations to be created in a matter of seconds

## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (L x H x W):	85 mm x 85 mm x 72 mm		
Housing:	PP-GF, black		
Lens:	LED Beacon 853: PC, transparent Sounder 153: PC, tinted black		
Connection:	Screw terminal 0.5 - 1.5 mm <sup>2</sup>		
Cable entry:	Cable diameter max. 8 mm, optional Cable gland M20 (accessory)		
Fixing:	Wall and ceiling mounting		
Current consumption:	Max. 200 mA at 24 V		
Equipment:	Eight self-sealing membranes for cable entry without tools Eight integrated M20 threads, no nuts required Optional use of a cable gland, thread length of cable gland ≤ 9 mm (accessory)		
Assembly:	Incl. snap-on fixing bracket (optional use)		
Voltage:	12 V DC	24 V DC	48 V AC
Current consumption:	70 mA	120 mA	150 mA
Order no.:	<b>153 000 54</b>	<b>153 000 55</b>	<b>153 000 66</b>
			<b>153 000 60</b>

The technical specifications and order specifications of the LED Beacons can be found at [www.werma.com](http://www.werma.com) or on page 139 (LED Permanent Beacon), page 140 (LED Double Flash Beacon) and page 141 (LED EVS Beacon).



## ❖ ACCESSORIES:

Connector for traffic light combinations	<b>975 853 01</b>
Cable gland M20 x 1.5 mm, 8mm thread length	<b>975 853 02</b>


## ♪ TONE TYPES AND FREQUENCIES:

Tone	Tone type	Tone	Tone type
1	Continuous tone (c. 3000 Hz)	5	800 - 970 Hz rising @ 1 Hz
2	Horn tone (c. 110 Hz)	6	2400 - 2850 Hz rising @ 7 Hz
3	1 Hz tone (c. 3,0 kHz)	7	1200 - 500 Hz falling @ 1 Hz
4	20 Hz whistle tone (c. 3,0 kHz)	8	Alternating tone 800 Hz/1200 Hz@1 Hz

## ↔ TECHNICAL DIAGRAM:



12 V, 24 V 48 V, 115-230 V





# Traffic Lights - 890/895/894

## Your benefits

Signal lights and traffic lights from the 890/895/894 range provide reliable signalling, both as single lights or as combined signalling lights.

### Modular traffic lights 890 and multi-tone sounder 190:

- Cost-effective LED traffic light with clear lenses
- Easy installation in just a few steps and with any combination of 4 lights

### Multi-colour variant 890 (RGY):

- Drastic reduction in number of variants by combining three light colours in a single product – Ideal where space is restricted
- Additional high-output audible signalling of up to 110 dB(A) available in combination with multi-tone sounder/vocal alarm 190

### Compact LED traffic light 894 for extreme ambient conditions:

- With high IP65/IP69K protection rating for use in extremely harsh conditions



## Typical applications

- Garages and car parks
- Access control or buildings
- Traffic regulation on construction sites
- Signalling for loading bays
- Car washes/washing areas

## Installation options

### Modular traffic light 890:

- Direct mounting or bracket mounting of up to 4 lights with fixing bracket

### Compact LED traffic light 894:

- Wall mounting and tube mounting with additional adapter

## Features

### 190 Vocal Alarm:

- The vocal alarm enables the high-output playback of spoken messages, music and tones provided in mp3 format



# 890 LED Beacon/LED Traffic Light



LED Permanent Beacon



LED Traffic Light Combination  
with mounting bracket  
(accessory)



Clear lenses ensure effective  
signalling even in direct sunlight

## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height):	150 mm x 154 mm
Housing:	PC/ABS-Blend, grey
Lens:	PC, transparent
Fixing:	Base mounting, bracket mounting (accessory), tube mounting (accessory)
Cable entry:	From top or bottom with cable gland M20 x 1.5 mm or from the back with rubber grommet Ø 6-12 mm, included in assembly.
Colours:	Red, green, yellow
Connection:	CAGE CLAMP® 0.5 - 1.5 mm <sup>2</sup>
Installation position:	As required
Life duration:	Up to 50,000 hrs

### LED Beacon/LED Traffic Light

Voltage:	12-24 V DC	115-230 V AC
Current consumption:	< 260 mA	< 35 mA
red	<b>890 120 55</b>	<b>890 120 68</b>
green	<b>890 220 55</b>	<b>890 220 68</b>
yellow	<b>890 320 55</b>	<b>890 320 68</b>

### LED Permanent Light (RGY)

Voltage:	12-24 V DC	230 V AC
Current consumption:	< 220 mA	< 40 mA
RGY (red, green, yellow)	<b>890 480 55</b>	<b>890 480 68</b>

## ❖ ACCESSORIES:

### FIXING BRACKET

Fixing bracket for one beacon	<b>975 890 33</b>
Fixing bracket for two beacons	<b>975 890 34</b>
Fixing bracket for three beacons	<b>975 890 35</b>
Fixing bracket for four beacons	<b>975 890 37</b>

Mounting material and connecting grommet included in assembly.  
Further information can be found on page 144.



### CONNECTING GROMMET

Connecting grommet for traffic light combinations	<b>975 890 25</b>
---	-------------------

## ! ADDITIONAL INFORMATION:

Traffic light configurator at [www.werma.com](http://www.werma.com)

## ↔ TECHNICAL DIAGRAM:

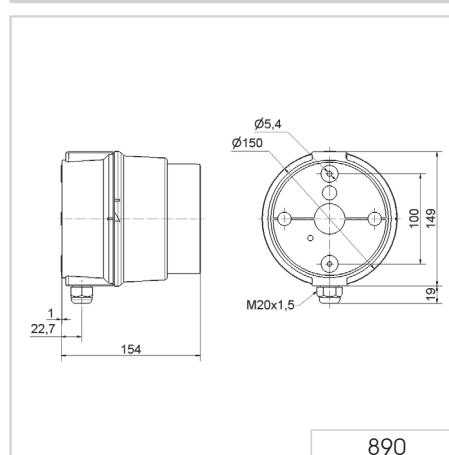



High-output traffic light combination



Vocal alarm 190

## 890/190 (LED) Beacon 890/Multi-Tone Sounder 190/Vocal alarm 190 Combination

### ⓘ TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

#### (LED-)Beacon/Sounder 190/Vocal Alarm 190

Dimensions (Ø x Height):	150 mm x 154 mm (890) 150 mm x 127 mm (190) 150 mm x 148 mm (Vocal Alarm 190)
Housing:	PC/ABS-Blend, grey
Lens:	PC, transparent
Fixing:	Base mounting, fixing bracket (accessory)
Cable entry:	From top or bottom with cable gland M20 x 1.5 mm or from the back with rubber grommet Ø 6-12 mm, included in assembly
Connection:	CAGE CLAMP® 0.5 - 1.5 mm <sup>2</sup>

#### Vocal Alarm 190

Sound output:	Adjustable, up to 110 dB
File Transfer:	Via USB connection and provided software
Possible data format:	mp3 and wav files
Number of sequences:	15 files can be remotely triggered or one sequence with max. 50 files
Suitable for:	Windows®, System requirements - see Handbook
Assembly:	Vocal alarm, USB connection cable and software

#### Multi-Tone Sounder 190

Voltage:	10-30 V DC	115 V AC	230 V AC
Current consumption:	< 180 mA	< 55 mA	< 30 mA
grey	<b>190 000 55</b>	<b>190 000 67</b>	<b>190 000 68</b>

#### Vocal Alarm 190

Voltage:	24 V DC
Current consumption:	< 500 mA Low Power < 1500 mA High Power
grey	<b>190 020 55</b>

#### LED Beacon 890 see page 145

#### Permanent Beacon 890 see page 148





### ⚡ ACCESSORIES:

Fixing bracket, tube adaptor and connecting grommet see page 144

### ⌈ TONE TYPES AND FREQUENCIES:

Selectable via DIP switch, see tone table on page 180.

### ↔ TECHNICAL DIAGRAM:

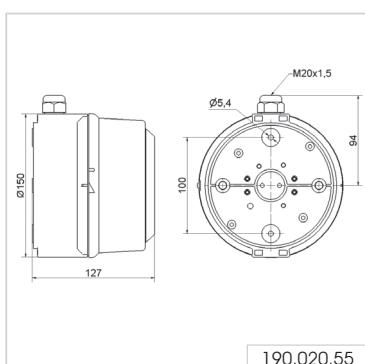

# 895 Permanent Beacon



## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:



Dimensions (Ø x Height):	150 mm x 148 mm
Housing:	PC/ABS-Blend, grey
Lens:	PC, transparent
Socket:	E27 max. 25 W with adhesive stickers E27 max. 15 W
Fixing:	Base mounting, tube mounting and fixing bracket (accessory)
Connection:	Screwed cable gland 0.5 - 1.5 mm <sup>2</sup>
Cable entry:	From top or bottom with cable gland M20 x 1.5 mm or from the back with rubber grommet Ø 6-12 mm
Voltage:	12-230 V AC/DC
red	<b>895 100 00</b>
green	<b>895 200 00</b>
yellow	<b>895 300 00</b>
clear	<b>895 400 00</b>
blue	<b>895 500 00</b>

Bulb not included in assembly.

## ❖ ACCESSORIES:

Fixing bracket, additional reflector, Bulbs and LED Bulbs, Adhesive Stickers see Permanent/Traffic Light Beacon (page 149).

## ↔ TECHNICAL DIAGRAM:

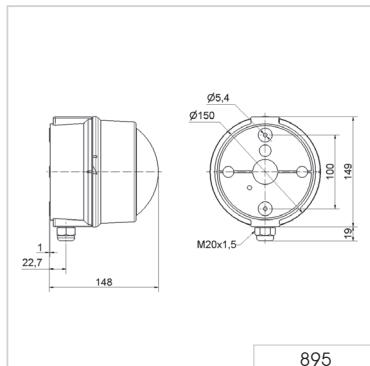



Permanent Beacon

Traffic Light Combination  
with mounting bracket  
(accessory)

## 890 Permanent/Traffic Light

### ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height):	150 mm x 154 mm
Housing:	PC/ABS-Blend, grey
Lens:	PC, transparent
Socket:	E27 max. 25 W for 890 X00 00 with adhesive stickers E27 max. 15 W
Fixing:	Base mounting, fixing bracket (accessory), tube mounting (accessory)
Connection:	Screwed cable gland 0.5 - 1.5 mm <sup>2</sup>
Cable entry:	From top or bottom with cable gland M20 x 1.5 mm or from the back with rubber

#### PERMANENT BEACON

Voltage:	12-230 V AC/DC
red	<b>890 100 00</b>
green	<b>890 200 00</b>
yellow	<b>890 300 00</b>
clear	<b>890 400 00</b>
blue	<b>890 500 00</b>

Further colours and voltages on request.

### ❖ ACCESSORIES: SEE NEXT PAGE



# 890 Permanent/Traffic Light Beacon



Beacon 890 in combination with Multi-Tone Sounder 190 (see page 146)



The adaptor (accessory) allows quick and simple mounting on a tube ( $\varnothing$  75 mm)



890 with adhesive sticker (accessory)

## ❖ ACCESSORIES:

### FIXING BRACKET

Fixing bracket for one beacon	<b>975 890 33</b>
Fixing bracket for two beacons	<b>975 890 34</b>
Fixing bracket for three beacons	<b>975 890 35</b>
Fixing bracket for four beacons	<b>975 890 37</b>

Mounting material and connecting grommet included in assembly.  
Further information can be found on page 150.

### CONNECTING GROMMET

Connecting grommet for traffic light combinations	<b>975 890 25</b>
---	-------------------

### REFLECTOR

Additional reflector for 890 X00 00	<b>975 890 02</b>
-------------------------------------	-------------------

### ADAPTER

Tube adapter	<b>975 890 36</b>
--------------	-------------------


### BULBS

LED bulb premium E27, 24 V	<b>956 X20 75</b>
LED bulb premium E27, 115 V	<b>956 X20 67</b>
LED bulb premium E27, 230 V	<b>956 X20 68</b>
For colours see page 151	
LED Bulb E27, 115 V AC, white	<b>956 050 67</b>
LED Bulb E27, 230 V AC, white	<b>956 050 68</b>
LED Bulb E27, 12-24 V AC/AC, white	<b>956 050 75</b>

### ADHESIVE STICKERS:

→	<b>975 890 52</b>
STOP	<b>975 890 53</b>
START	<b>975 890 54</b>
↓	<b>975 890 64</b>
↙	<b>975 890 65</b>

## ↔ TECHNICAL DIAGRAM:

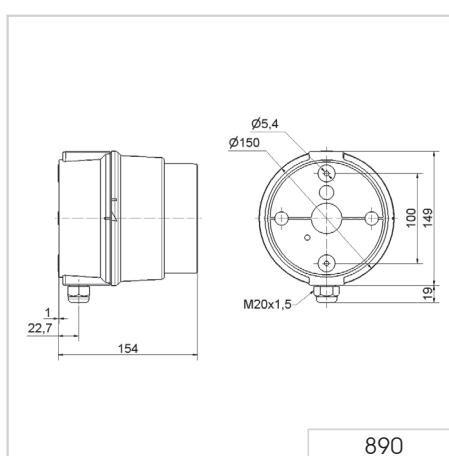



Fixing bracket for  
(LED) Beacons 890  
and Multi-Tone Sounder 190





The fixing bracket can be mounted  
pointing inwards or outwards

## 890 Fixing bracket for 890/190

### ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Material Fixing bracket:	PC/ABS-Blend, grey
Material Connecting Grommet:	PA 6.6
Assembly:	Fixing bracket with mounting material and connecting grommet
Suitable for:	LED Beacon/LED Traffic Light 890 Permanent/Traffic Light Beacon 890 Multi-Tone Sounder 190
Fixing bracket for one beacon	<b>975 890 33</b>
Fixing bracket for two beacons	<b>975 890 34</b>
Fixing bracket for three beacons	<b>975 890 35</b>
Fixing bracket for four beacons	<b>975 890 37</b>

### ↔ TECHNICAL DIAGRAM:

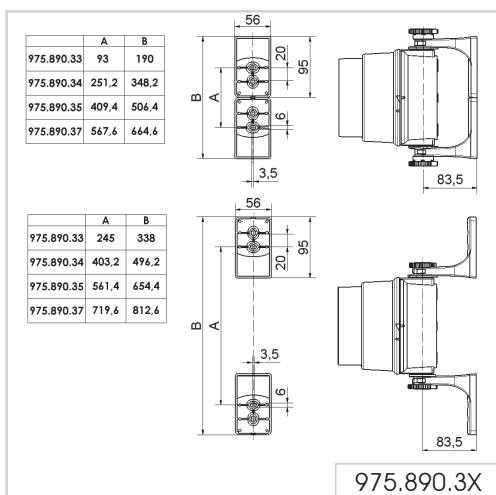

## 956 LED Bulb E27 premium



### ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Socket:	E27		
For use with:	890, 895		
Slight deviations in the form of the bulbs are possible.			
Voltage:	24 V AC/DC	115 V AC	230 V AC
Current consumption:	≤ 20 mA	≤ 30 mA	≤ 20 mA
red	<b>956 120 75</b>	<b>956 120 67</b>	<b>956 120 68</b>
green	<b>956 220 75</b>	<b>956 220 67</b>	<b>956 220 68</b>
yellow	<b>956 320 75</b>	<b>956 320 67</b>	<b>956 320 68</b>



Suitable for use in  
Permanent/Traffic Light  
Beacons 890 (see page 148)





LED Traffic Light (3 tier)



The direction of the optical signal can be individually adjusted



Clear lenses ensure effective signalling even in direct sunlight

## 894 LED Traffic Light (IP69k)

### ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:



Dimensions (Ø x Height):	2 tier: 85 mm x 309 mm x 136 mm 3 tier: 85 mm x 394 mm x 136 mm
Housing:	PC/ABS, grey
Lens:	PC, transparent
Fixing:	Wall mounting, tube mounting (accessory)
Cable entry:	Cable diameter max. 13 mm
Connection:	Screw terminal 0.5 - 1.5 mm <sup>2</sup>
Installation position:	Vertical/hanging
Duty cycle:	100 %
Life duration:	Up to 50,000 hrs
Voltage:	24 V DC
Current consumption:	60 mA (red/yellow) 120 mA (green)
red/green	<b>894 160 55</b>
red/yellow/green	<b>894 180 55</b>
	115-230 V AC 30 mA per tier at 230 V/50 Hz
	<b>894 160 68</b>
	<b>894 180 68</b>

### ❖ ACCESSORIES:

Fixing bracket underneath

**975 894 01**

### ↔ TECHNICAL DIAGRAM:

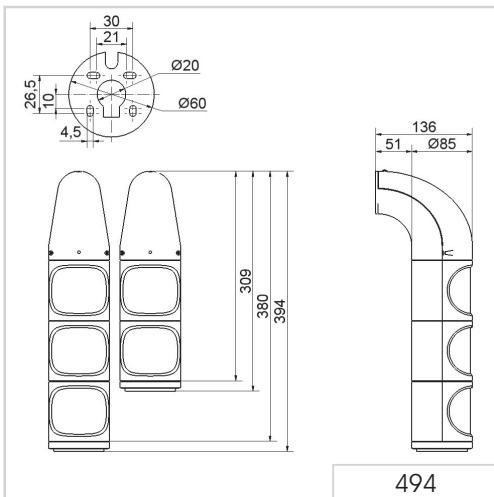

# 894 LED Traffic Light (IP69k)




The direction of the optical signal can be individually adjusted

## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height):	2 tier: 85 mm x 309 mm x 136 mm 3 tier: 85 mm x 394 mm x 136 mm
Housing:	PC/ABS, grey
Lens:	PC, transparent
Fixing:	Wall mounting, tube mounting (accessory)
Cable entry:	Cable diameter max. 13 mm
Connection:	Screw terminal 0.5 - 1.5 mm <sup>2</sup>
Installation position:	Vertical/hanging
Duty cycle:	100 %
Life duration:	Up to 50,000 hrs
Voltage:	24 V DC
Current consumption:	60 mA (red/yellow) red/green <b>894 060 55</b> red/yellow/green <b>894 080 55</b>
	115-230 V AC 30 mA per tier at 230 V/50 Hz <b>894 060 68</b> <b>894 080 68</b>

## ↔ TECHNICAL DIAGRAM:

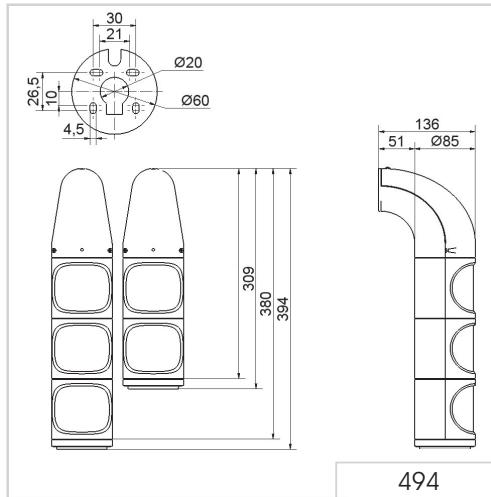





Horns & Sirens

# Overview Buzzer, Sirens, Horns and Sounders

## Audible signals are everywhere!

Audible signals warn, protect and guide us in the modern industrial world. They function where caution, prudence and clarity are imperative, indicate emergencies and demand direct action. They are globally understood, irrespective of language, written or spoken.

Audible signals are deployed where an optical signal is insufficient or inappropriate. The basic signal is provided by one or more tones or a sequence of tones, raising awareness and alerting to a specific danger.



Overview Buzzer, Sirens, Horns and Sounders		Installation	Free-standing	Free-standing	Free-standing
Category	Product range	Installation Sirens and Buzzer	EvoSIGNAL Mini	EvoSIGNAL Midi	Horns & Sounders
Dimensions (Ø x Height)*		See technical specifications			
Dimensions (L x H x W)					
Voltage	12 V	●	●	●	●
	24 V	●	●	●	●
	30 V				
	48 V	●			●
	115 V	●	●	●	●
	230 V	●	●	●	●
Audible	Continuous tone	●	●		●
	Pulse tone	●	●		●
	Multi-tone sounder	●		●	●
	Horn				●
	Alternating tone				●
	Vocal alarm				
	Alarm bell				
Protection rating		IP30-65	IP33-65	IP66	IP33-65
Page		Page 158	Page 167	Page 170	Page 173

\* Technical diagrams can be found on the product page



<b>Free-standing</b> Design Multi-Tone Sounder	<b>Free-standing</b> Vocal alarm	<b>Free-standing</b> Heavy Duty Multi-Tone Sounder	<b>Free-standing</b> Alarm Bell
See technical specifications			
•	•	•	•
•		•	
•		•	
•		•	
•		•	
•		•	
IP65	IP65	up to IP67	IP66
Page 180	Page 185	Page 187	Page 194

# Installation Buzzers and Sounders

## Your benefits

WERMA Installation Buzzers and Sounders have been specifically designed for easy installation in control panels.

- Quick and easy installation
- Tamper-proof when installed
- Minimal protrusion from panel installations where space is tight

## Typical applications

Signalling faults or status messages

- in control cabinets

## Installation options

- Installation mounting

## Features

- Proven piezo technology (except 382)

### 107, 109, 110, 111

- High IP65 protection rating for outdoor applications
- Easy to connect using a plug-in connection
- Up to 8 tones for signalling different statuses



# 107 Electronic Installation Buzzer




## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height):	28 mm x 12 mm (Protrusion from panel)	
Housing:	PA fibreglass, high-impact	
Tone frequency:	c. 2,400 Hz / c. 3,200 Hz (12 V)	
Tone type:	Continuous tone or pulse tone with approx. 1 Hz	
Fixing:	Installation mounting for Ø 22.5 mm (M22)	
Connection:	Connector plug with screw terminal max. 1.5 mm <sup>2</sup>	
Life duration:	> 5,000 hrs	
Voltage:	12-24 V AC/DC	115-230 V AC
Current consumption:	8 mA	12 mA
Continuous tone	<b>107 000 70</b>	<b>107 000 60</b>
Pulse tone	<b>107 010 70</b>	<b>107 010 60</b>


## ↔ TECHNICAL DIAGRAM:



Simple connection by means of connector plug

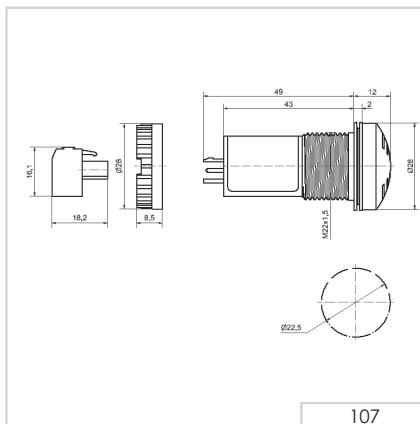

High protection rating IP 65 for use in arduous conditions



# 109 Electronic Installation Buzzer



Surface housing (accessory)



Surface housing (triple) for 2 beacons and 1 audible element (not included in assembly)


## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height):	52 mm x 35 mm (Protrusion from panel)		
Housing:	PC/ABS-Blend; Cap: PC		
Tone frequency:	c. 2,100 Hz		
Tone type:	Continuous tone or pulse tone with approx. 1 Hz		
Fixing:	Installation mounting for Ø 22.5 mm (M22) with anti-twist device		
Connection:	Connector plug with screw terminal max. 1.5 mm <sup>2</sup>		
Life duration:	> 5,000 hrs		
Voltage:	24 V AC/DC	115 V AC/DC	230 V AC
Current consumption:	25 mA	25 mA	25 mA
Continuous tone	<b>109 000 75</b>	<b>109 000 77</b>	<b>109 000 68</b>
Pulse tone	<b>109 010 75</b>	<b>109 010 77</b>	<b>109 010 68</b>

## ☒ ACCESSORIES:

Bracket with protective cap (IP54), only 24 V	<b>975 109 01</b>
Single surface housing	<b>975 109 02</b>
Double surface housing	<b>975 109 03</b>
Triple surface housing	<b>975 109 04</b>
Assembly comprises of only the surface housing. Beacons 800-802 or 815-817 have to be ordered additionally.	

## ↔ TECHNICAL DIAGRAM:

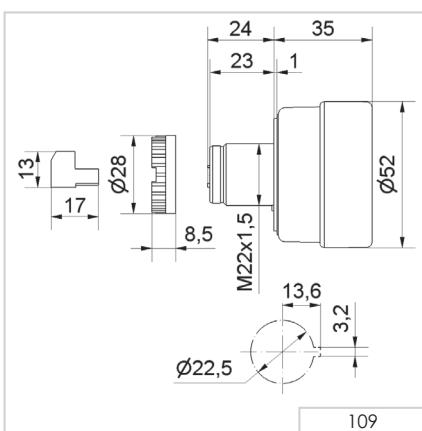

# 110 Electronic Installation Multi-Tone Sounder



Surface housing (accessory)



Bracket (accessory)

## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height):	72 mm x 40 mm (Protrusion from panel)		
Housing:	PC/ABS-Blend; Cap: PC		
Sound output:	Max. 100 dB (sound output is adjustable on rear side when mounted)		
Fixing:	Installation mounting for Ø 22.5 mm (M22) with anti-twist device		
Connection:	Connector plug with screw terminal max. 1.5 mm <sup>2</sup>		
Life duration:	> 5,000 hrs		
Voltage:	24 V AC/DC	115 V AC	230 V AC
Current consumption:	80 mA	40 mA	40 mA
Order No.:	<b>110 000 75</b>	<b>110 000 67</b>	<b>110 000 68</b>

## ♪ TONE TYPES AND FREQUENCIES:



8 tones selectable on rear side of the housing

	position 0		1.6 kHz	86 dB (A)
	position 1		1.6 kHz	86 dB (A)
	position 2		1.6 kHz	86 dB (A)
	position 3		1.6 kHz	88 dB (A)
	position 4		3.4 kHz	90 dB (A)
	position 5		3.4 kHz	100 dB (A)
	position 6		3.4 kHz	96 dB (A)
	position 7		3.4 kHz	100 dB (A)

## ☒ ACCESSORIES:

Bracket with protective cap (IP 54)	<b>975 109 01</b>
Surface housing IP 65 (single)	<b>975 109 02</b>
Surface housing IP 65 (double)	<b>975 109 03</b>
for 1 installation beacon and 1 Installation siren	
Surface housing IP 65 (triple)	<b>975 109 04</b>
for 2 installation beacons and 1 Installation siren	

## ↔ TECHNICAL DIAGRAM:

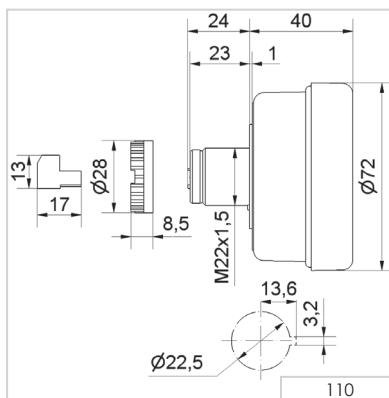



With its minimum level of protrusion the installation buzzer 111 is ideal for control panel applications





Simple installation with single hole mounting for M22

## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height):	50 mm x 22 mm (Protrusion from panel)
Housing:	PC/ABS-Blend, black; Cap: PC
Tone frequency:	c. 2,800 Hz
Tone type:	Continuous or pulse tone
Fixing:	Installation mounting for Ø 22.5 mm (M22 x 1.5 mm)
Connection:	Connector plug with screw terminal max. 1.5 mm <sup>2</sup>
Life duration:	> 5,000 hrs
Assembly:	Nut and seal included in assembly
Voltage:	24 V DC      230 V AC
Current consumption:	25 mA      20 mA
Continuous tone	<b>111 000 55</b> <b>111 000 68</b>

## ↔ TECHNICAL DIAGRAM:

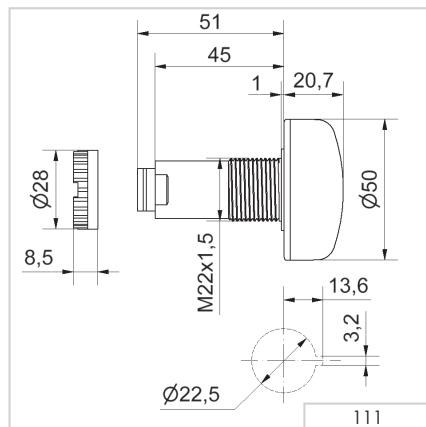


# 114 Electronic Installation Buzzer



## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height):	42.5 mm x 10 mm (Protrusion from panel)
Housing:	PC/ABS-Blend; Nut: PA fibreglass, high-impact
Connection:	Spades 6.3 x 0.8 mm, finger proof model according to BGV A2, when used with insulated spades
Tone frequency:	c. 2,400 Hz
Fixing:	Installation mounting for Ø 30.5 mm (M30)
Voltage:	24 V DC (12-30 V)
Current consumption:	20 mA
Order No.:	<b>114 068 15</b>

## ↔ TECHNICAL DIAGRAM:

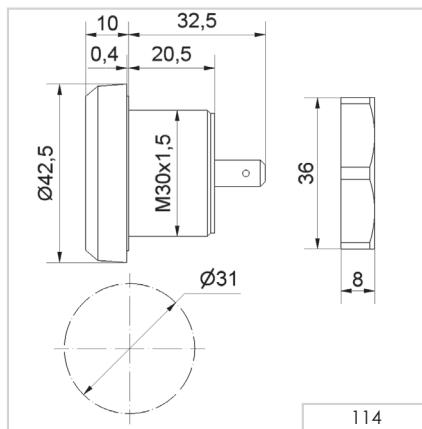

# 118/119 Electronic Installation Buzzer



Cap




## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height):	43 mm x 49 mm (Protrusion from panel)				
Housing:	PC/ABS-Blend				
Connection:	Spades 6.3 x 0.8 mm, finger proof model according to BGV A2, when used with insulated spades				
Tone frequency:	c. 2,400 Hz				
Tone type:	Type 118 Continuous tone Type 119 Continuous tone and pulse tone, c. 1 Hz, selectable via plug-in terminal Version with 3 tones: 2.7 kHz, 270 Hz, 337 Hz				
Fixing:	Installation mounting for Ø 28.5 mm (M28)				
Voltage:	12 V DC	24 V AC/DC	48 V AC/DC	115 V AC/DC	230 V AC
Current consumption:	20 mA	20 mA	20 mA	20 mA	20 mA
Continuous tone	<b>118 068 14</b>	<b>118 068 15</b>	<b>118 068 26</b>	<b>118 068 27</b>	<b>118 068 28</b>
Continuous/pulse tone	-	<b>119 068 15</b>	<b>119 068 26</b>	<b>119 068 27</b>	<b>119 068 28</b>
Voltage:	24 V DC (9-29 V DC)				
Current consumption:	< 30 mA (Tone 1)				
3 tones	<b>119 004 55</b>				

## ❖ ACCESSORIES:

Cap	<b>975 118 00</b>
-----	-------------------

## ↔ TECHNICAL DIAGRAM:

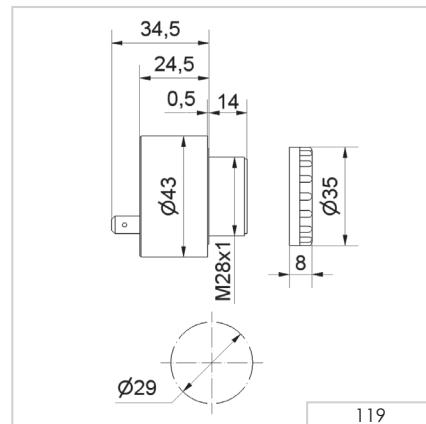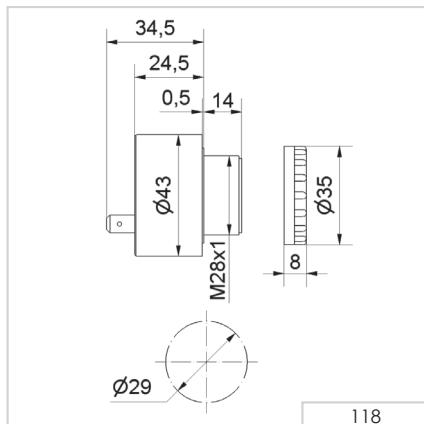



Midi

Mini





## Your benefits

The type of audible signals used depends on the application and the environment. With *EvoSIGNAL*, finding the right signal device has never been so easy: almost all applications are covered by only two sizes with specific mounting adapters. The new modular, simple and clear standard solution. *EvoSIGNAL* is one of a kind.

- Simple and easy to use: Number of different articles reduced to 20% whilst retaining a full range
- Adaptable: Adjustable volume, 10 tones available with Midi range
- Poka Yoke: Simple and intuitive installation - incorrect installation is impossible

## Typical applications

Signal faults and statuses on machines and equipment, in building services engineering and for electric gates and entry access systems. All products are ideal for demanding indoor and outdoor applications.

- Mini – in installation sites with limited space
- Midi – signalling over medium distances (10–30 m)

## Installation options


- Base mounting
- M22/PG 29 single-hole mounting
- Tube mounting
- Bracket mounting

## Features

- Push fit connection terminals: Simple and permanently secure connection
- Fully compatible: Easy replacement of previous products
- Best-in-class equipment: Powerful, extremely robust (IP66), tamper-proof



## EvoSIGNAL Mini - Horns & Sirens

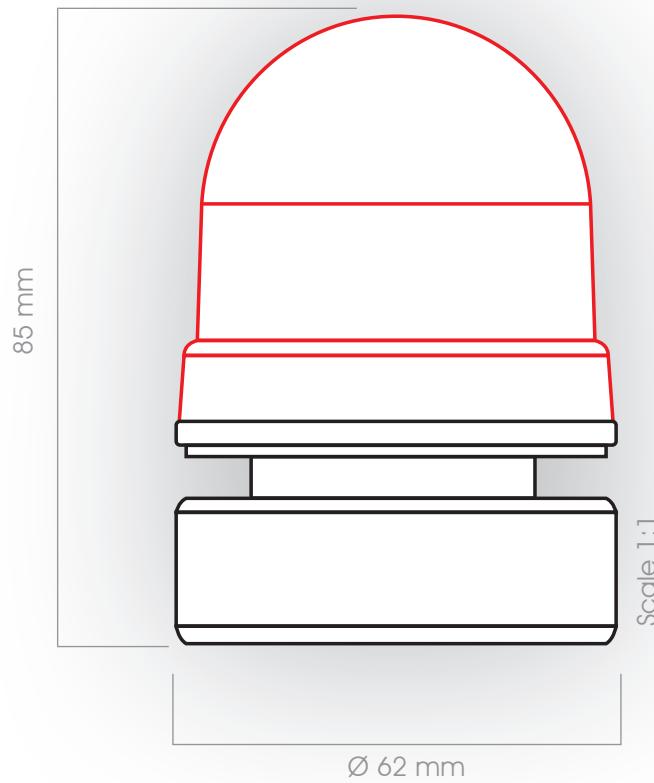

3  
Horns & Sirens



6  
Mounting adapter



# Quick-Finder EvoS/GNAL Mini - Horns & Sirens



**12 V AC/DC**

160 700 74

**24 V AC/DC**

160 700 75

**115-230 V AC**

160 700 60

+ Mounting adapter (compulsory!)

Base mounting



Order no.  
260 700 01

Installation  
mounting M22



Order no.  
260 700 03

Installation  
mounting PG 29




Order no.  
260 700 04

Tube mounting



Order no.  
260 700 05

Bracket mounting  
with cable gland




Order no.  
260 700 06


Bracket mounting




Order no.  
260 700 07

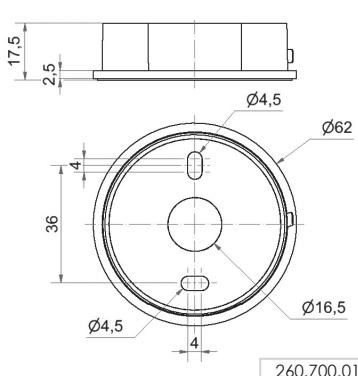


260.700.01

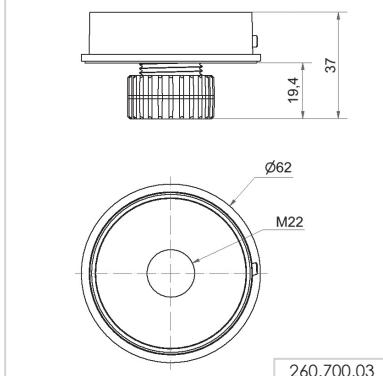


260.700.03

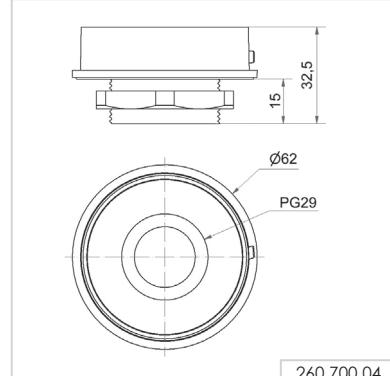


260.700.04

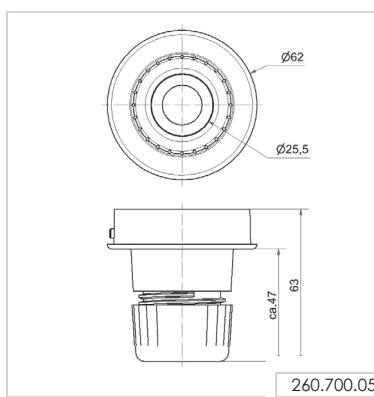

260.700.05

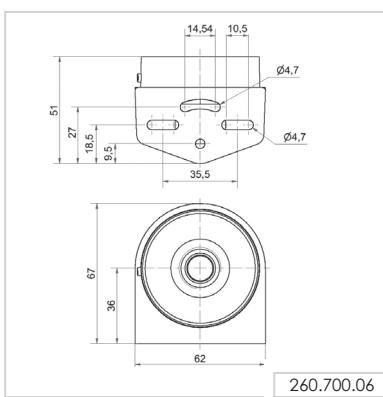

260.700.06

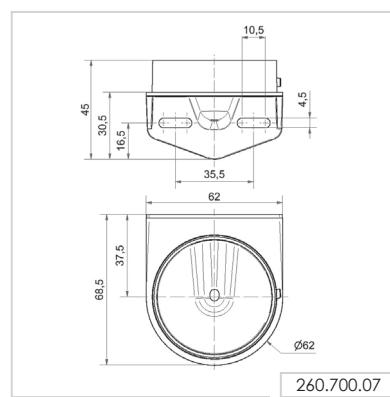

260.700.07



# EvoS/GNAL Mini - Horns & Sirens



Bracket mounting  
with cable gland


## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height):	62 mm x 85 mm		
Housing:	PC/ABS		
Lens:	PC, grey		
Fixing:	Base/Tube/Wall and Installation mounting		
Cable entry:	Cable diameter 8-12 mm		
Connection:	Push-In terminal max. 1.5 mm <sup>2</sup>		
Tone type:	Pulse or Permanent tone		
Voltage:	12 V AC/DC	24 V AC/DC	115-230 V AC
Current consumption:	≤ 30 mA	≤ 40 mA	≤ 30 mA
Order no.	<b>160 700 74</b>	<b>160 700 75</b>	<b>160 700 60</b>


## ❖ ACCESSORIES:

Base mounting	<b>260 700 01</b>
Installation mounting M22	<b>260 700 03</b>
Installation mounting PG 29	<b>260 700 04</b>
Tube mounting	<b>260 700 05</b>
Bracket mounting with cable gland	<b>260 700 06</b>
Bracket mounting	<b>260 700 07</b>

## ↔ TECHNICAL DIAGRAM:

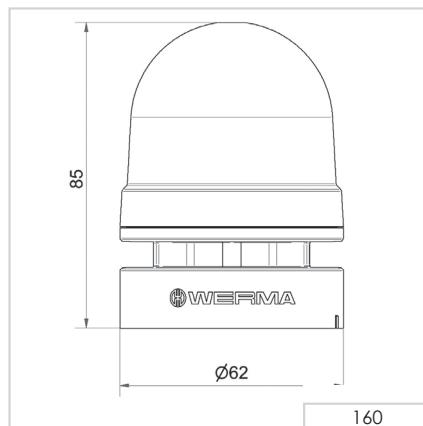

# EvoSIGNAL Midi - Horns & Sirens

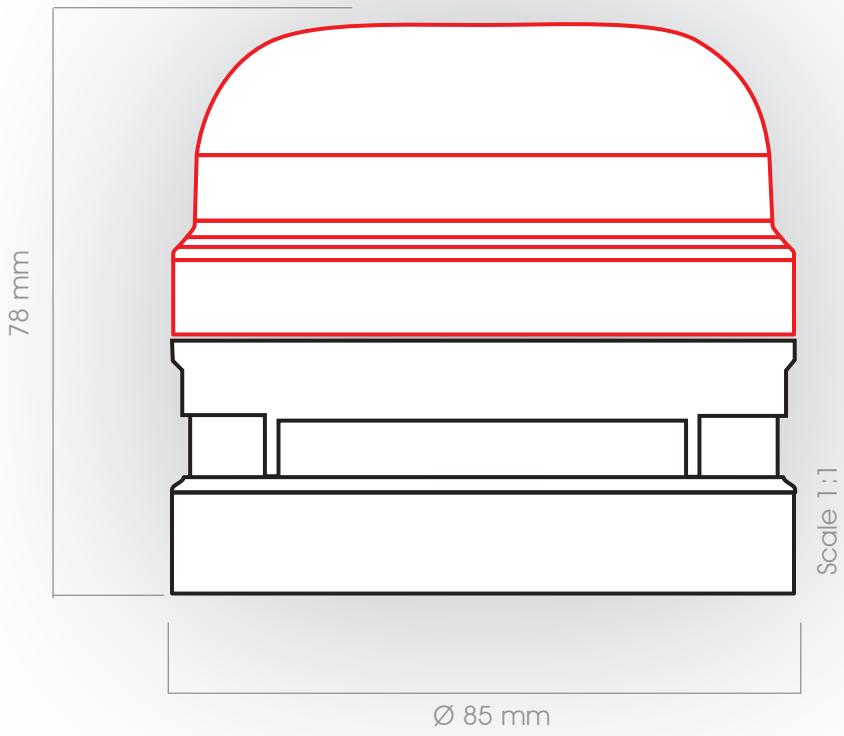

2  
Horns & Sirens



6  
Mounting adapter

# Quick-Finder EvoS/GNAL Midi - Horns & Sirens



**12/24 V AC/DC**

161 700 70

**115-230 V AC**

161 700 60

**+ Mounting adapter (compulsory!)**

Base mounting



Order no.  
261 700 01

Base mounting  
with cable gland



Order no.  
261 700 02

Tube mounting



Order no.  
261 700 05

Bracket mounting  
with cable gland



Order no.  
261 700 06

Bracket mounting









Order no.  
261 700 07

Horn



Order no.  
261 700 03

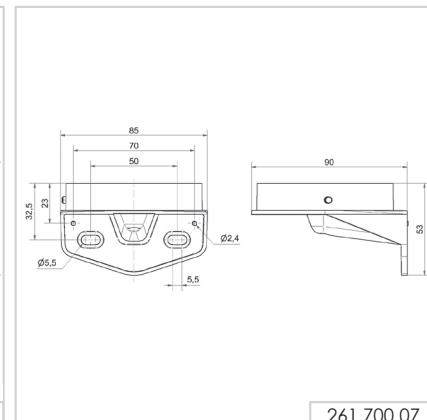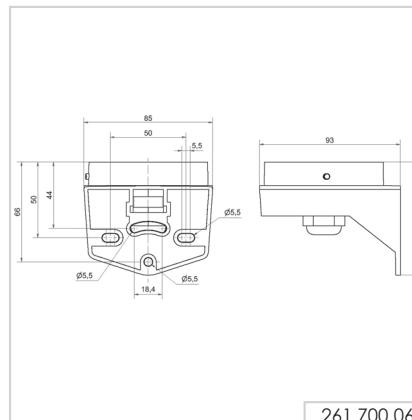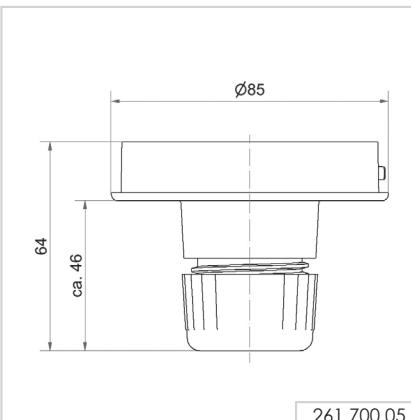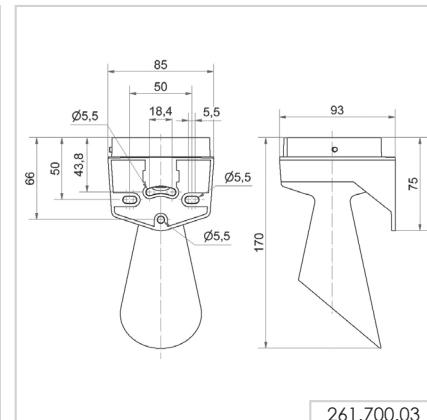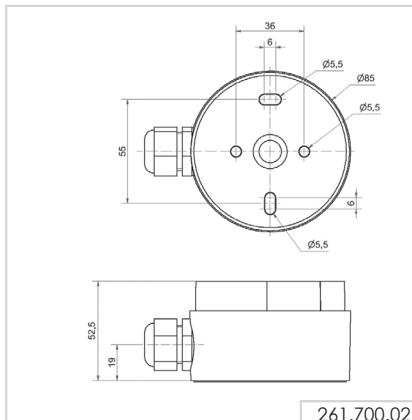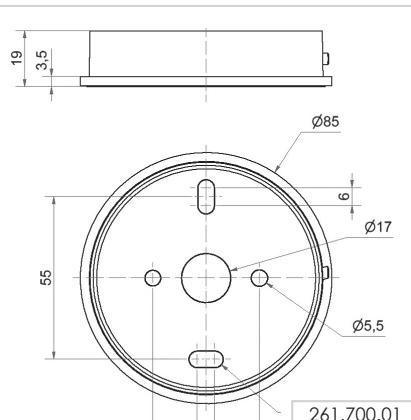



Base mounting



Tube mounting



Bracket mounting

## EvoS/GNAL Midi - Horns & Sirens

### ⓘ TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS

Dimensions (Ø x Height):	85 mm x 78 mm
Housing:	PC/ABS
Lens:	PC, grey
Fixing:	Base/Tube/Wall mounting
Cable entry:	Cable diameter 8-12 mm
Connection:	Push-In terminal max. 1.5 mm <sup>2</sup>
Tone type:	Multi-tone
Tone frequency:	3300 Hz

Voltage:	12/24 V AC/DC	115-230 V AC
Current consumption:	≤ 175 mA	≤ 105 mA
Order no.	<b>161 700 70</b>	<b>161 700 60</b>

### ♪ TONE TYPES AND FREQUENCIES


10 selectable tones and adjustable sound output

Tone	Tone type
0	Horn tone (ca. 110 Hz), max. 107 dB(A)
1	Continuous tone (ca. 3.3 kHz), max. 106 dB(A)
2	Pulse tone 1 Hz (ca. 3.3 kHz), max. 110 dB(A)
3	Whistle tone 20 Hz (ca. 3.3 kHz), max. 110 dB(A)
4	800 – 970 Hz rising @ 1 Hz, max. 95 dB(A)
5	2400 - 2850 Hz rising @ 7 Hz, max. 99 dB(A)
6	1200 – 500 Hz falling @ 1 Hz, max. 101 dB(A)
7	Alternating tone 800 Hz / 1200 Hz @ 1 Hz, max. 100 dB(A)
8	Sweep-Tone 2100 – 4100 Hz @ 0.5 Hz, max. 110 dB(A)
9	Continuous tone (c. 700 Hz), max. 97 dB(A)

### 🛠 ACCESSORIES:

Base mounting	<b>261 700 01</b>
Base mounting with cable gland	<b>261 700 02</b>
Tube mounting	<b>261 700 05</b>
Bracket mounting with cable gland	<b>261 700 06</b>
Bracket mounting	<b>261 700 07</b>
Horn	<b>261 700 03</b>

### ↔ TECHNICAL DIAGRAM

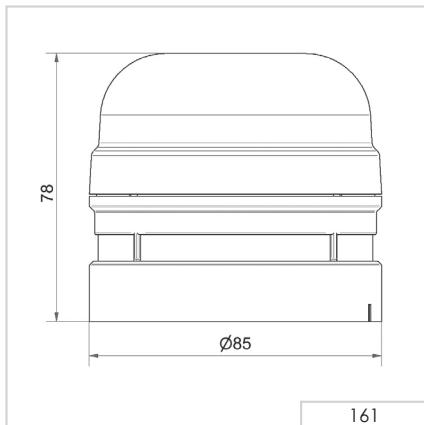

# Horns and Sirens

## Your benefits

The loud Horns, Sounders and Sirens from WERMA provide safety and security by delivering reliable audible warning when faults occur over longer distances or in noisy environments.

- Quick and easy installation
- Tamper-proof when installed
- Ideal for noisy environments

## Typical applications

Fault signalling

- On machine controllers and on large equipment
- In building service systems (e.g. gas alarm)
- Alarm in the event of overload (e.g. mobile cranes)

## Installation options

- Wall mounting

## Features

- 574/575 series with ten times longer life duration compared to electromechanical versions
- Up to 8 tones for signalling different statuses






## 123 Electronic Siren

### ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (L x H x W):	54 mm x 67 mm x 67 mm	
Housing:	ABS	
Tone frequency:	2.5 / 3.5 kHz	
Tone type:	Alternating	
Connection:	2 wires, c. 450 mm long	
Fixing:	Metal bracket	
Voltage:	12 V DC	24 V DC
Current consumption:	100 mA	100 mA
Order No.:	123 100 54	123 200 55

### ↔ TECHNICAL DIAGRAM:

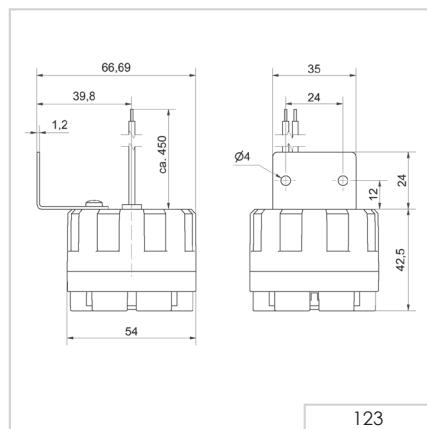



# 126 Electronic Multi-Tone Sounder



## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (L x H x W):	70 mm x 79.5 mm x 77 mm
Housing:	PC/ABS-Blend
Tone types and frequencies:	4 selectable tones adjustable Continuous tone: c. 2,700 Hz Continuous tone: c. 530 Hz Bell: c. 2,700 Hz (pulse 20 Hz) Pulse tone: c. 2,700 Hz (pulse 1 Hz)
Connection:	Screw terminal 0.5 - 1.5 mm <sup>2</sup>
Cable entry:	Cable diameter max. 9 mm
Fixing:	Wall mounting, Sound outlet facing downwards
Voltage:	12-24 V DC
Current consumption:	80 mA
Order No.:	<b>126 052 15</b>

## ↔ TECHNICAL DIAGRAM:

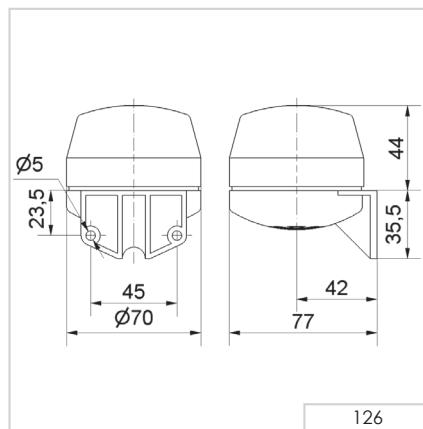


# 570 Electromechanical Signal Horn



## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (L x H x W):	148 mm x 350 mm x 152 mm			
Housing:	PC/ABS-Blend			
Connection:	Screw terminal 0.5 - 2.5 mm <sup>2</sup>			
Fixing:	Wall mounting, Sound outlet facing downwards			
Voltage:	24 V AC (50 Hz)	42-48 V AC (50/60 Hz)	115 V AC (50/60 Hz)	230 V AC (50 Hz)
Current consumpt.:	500 mA	250 mA	200 mA	70 mA
Order No.:	<b>570 052 65</b>	<b>570 052 66</b>	<b>570 052 67</b>	<b>570 052 68</b>
<b>Pulse tone (AC)</b>				
Voltage:			230 V AC (50 Hz)	
Current consumpt.:			≤ 70 mA	
Order No.:			<b>570 100 68</b>	
<b>Continuous tone (DC)</b>				
Voltage:	24 V DC		115 V DC	230 V DC
Current consumpt.:	350 mA		150 mA	100 mA
Order No.:	<b>570 052 55</b>		<b>570 052 57</b>	<b>570 052 58</b>
Further voltages on request.				

## ↔ TECHNICAL DIAGRAM:

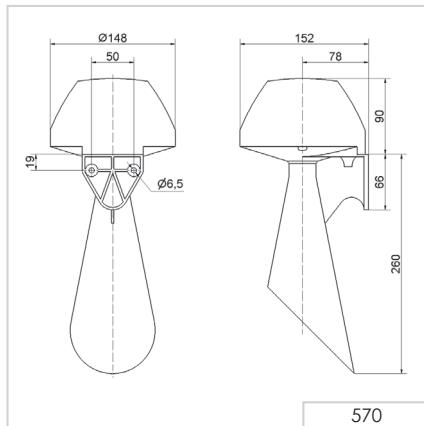

570




# 573 Electromechanical Signal Horn



## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (L x H x W):	104 mm x 232 mm x 232 mm				
Fixing dimensions (W x H):	130 mm x 160 mm				
Housing:	PC/ABS-Blend				
Connection:	Screw terminal 0.5 - 2.5 mm <sup>2</sup>				
Cable entry:	Cable gland M16 x 1.5 mm Cable diameter 5-10 mm				
Fixing:	Wall mounting, Sound outlet facing downwards				
Voltage:	24 V DC	24 V AC (50 Hz)	42-48 V AC (50/60 Hz)	115 V AC (50/60 Hz)	230 V AC (50 Hz)
Current consumption:	350 mA	500 mA	250 mA	200 mA	70 mA
Order No.:	573 000 55	573 000 65	573 000 66	573 000 67	573 000 68

## ↔ TECHNICAL DIAGRAM:

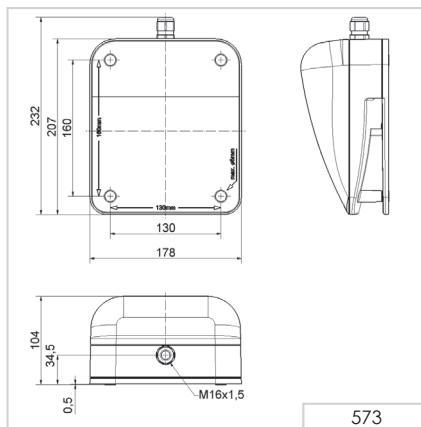

573






## 574 Electronic Signal Horn

### ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height):	134 mm x 340 mm		
Housing:	PC/ABS-Blend, grey		
Fixing:	Wall mounting, integrated mounting bracket		
Installation position:	Sound outlet facing downwards		
Connection:	Screw terminal 0.5 - 1.5 mm <sup>2</sup>		
Cable entry:	Cable diameter max. 11 mm		
Tone frequency:	C, 110 Hz		
Life duration:	Up to 5,000 hrs		
Voltage:	24 V AC/DC	12-48 V AC/DC*	115-230 V AC
Current consumption:	55 mA	210 mA	30 mA
Order No.:	<b>574 000 75</b>	<b>574 000 70</b>	<b>574 000 60</b>

\* Current consumption at 10 V / 115 V

### ↔ TECHNICAL DIAGRAM:

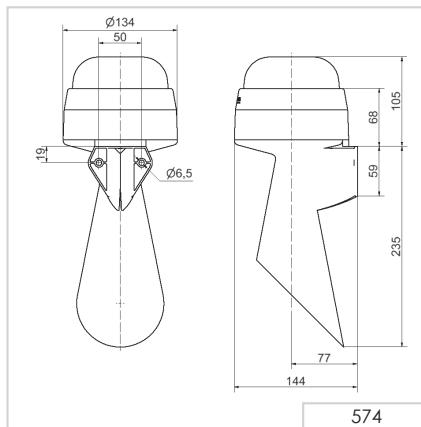

# 575 Electronic Signal Horn



Quick and simple wall mounting without additional accessories with the integrated mounting bracket




## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (L x H x W):	134 mm x 169 mm x 144 mm		
Housing:	PC/ABS-Blend, grey		
Fixing:	Wall mounting, integrated mounting bracket		
Installation position:	Sound outlet facing downwards		
Connection:	Screw terminal 0.5 - 1.5 mm <sup>2</sup>		
Cable entry:	Cable diameter max. 11 mm		
Tone frequency:	C, 110 Hz		
Life duration:	Up to 5,000 hrs		
Voltage:	24 V AC/DC	10-48 V AC/DC*	115-230 V AC
Current consumption:	55 mA	210 mA	30 mA
Order No.:	<b>575 000 75</b>	<b>575 000 70</b>	<b>575 000 60</b>

\* Current consumption at 10 V / 115 V

## ↔ TECHNICAL DIAGRAM:

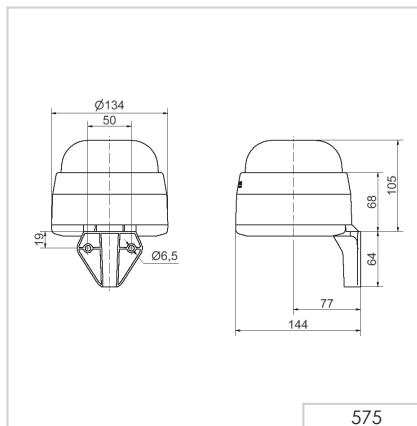

# Design Multi-Tone Sounder

## Your benefits

WERMA Design Multi-Tone Sounders provide safety and security by providing an audible warning in applications with greater aesthetic requirements. The innovative housing design makes for simple mounting in many diverse applications.

- Ideal signalling effect over great distances
- Many application options with up to 32 tones available
- Up to 3 tones can be externally triggered for the escalation of signals
- Includes standardised tones (including those used in fire alarms)

## Typical applications

- Signalling faults or alarms in the event of danger
- in building service systems
- on machinery and equipment

## Installation options

- Wall mounting
- Base mounting
- Ceiling mounting

## Features

- Up to 32 tones (standardised according to various standards and guidelines)
- Multi-voltage versions allow multiple applications with a single device



# 140 Multi-Tone Sounder





## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height):	100 mm x 110 mm
Housing:	PC/ABS-Blend
Connection:	Screw terminal max. 2.5 mm <sup>2</sup>
Cable entry:	Cable gland M20 x 1.5 mm
	Cable gland not included in assembly
Tone types and frequencies:	Selectable via DIP switch, see table page 182
Installation position:	Sound outlet not facing upwards
Voltage:	9-28 V DC
Current consumption:	≤ 120 mA
red	<b>140 150 50</b>
white	<b>140 950 50</b>
Voltage:	110-240 V AC
Current consumption:	≤ 40 mA
red	<b>140 150 60</b>
white	<b>140 950 60</b>

## ❖ ACCESSORIES:

Cable gland M20 x 1.5 mm **975 444 01**

## ↔ TECHNICAL DIAGRAM:

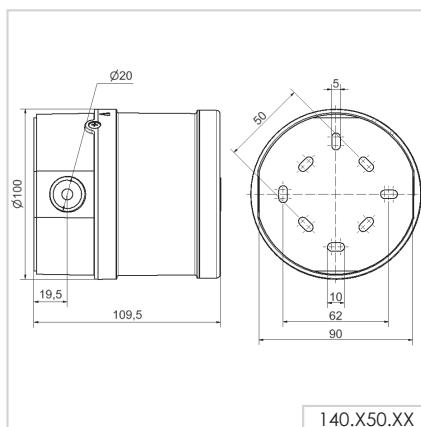



# 140 Tone table

The 140 Multi-Tone Sounder offers a large choice of internationally recognised signal tones for the widest spectrum of applications. The low voltage version allows two tones to be triggered externally. Selectable via DIP switch.

<b>♪ TONE TYPES AND FREQUENCIES:</b>					
<b>Tone 1 No.</b>	<b>Tone type</b>	<b>Description</b>	<b>Sound output (dBA)</b> (12 V)	<b>Sound output (dBA)</b> (24 V)	<b>Tone 2</b> Low voltage
1	alternating 800/970 Hz in 2 Hz stroke	BS 5839-1: 2002	101	105	14
2	rising 800/970 Hz in 7 Hz stroke		103	107	14
3	rising 800/970 Hz in 1 Hz stroke	BS 5839-1: 2002; VdS tested	104	108	14
4	continuous 2,850 Hz		110	115	14
5	rising 2,400-2,850 Hz in 7 Hz stroke		108	114	4
6	rising 2,400-2,850 Hz in 1 Hz stroke		109	115	4
7	500-1,200 Hz rising in 3 sec., 0.5 sec OFF		100	104	14
8	falling 1,200-500 Hz in 1 Hz stroke	DIN 33404; VdS tested	99	104	14
9	alternating 2,400/2,850 Hz in 2 Hz stroke		108	115	4
10	pulse 970 Hz in 0.5 Hz stroke	Back-up-alarm BS 5839 Part 1 1988	98	105	14
11	alternating 800/970 Hz in 1 Hz stroke	BS 5839 Part 1 1988	100	105	14
12	pulse 2,850 Hz in 0.5 Hz stroke		107	114	4
13	970 Hz pulse: 0.25 sec. ON / 1 sec. OFF		96	105	14
14	continuous 970 Hz	BS 5839-1: 2002	101	105	15
15	554 Hz/100 ms alternating 440 Hz/400 ms	French alarm signal AFNOR NFS 32 S 32-001	97	102	14
16	660 Hz pulse: 150 ms ON, 150 ms OFF	Swedish alarm signal	97	101	17
17	660 Hz pulse: 1.8 sec. ON, 1.8 sec. OFF	Swedish alarm signal	97	103	16
18	660 Hz pulse: 6.5 sec. ON, 13 sec. OFF	Swedish alarm signal	99	103	14
19	continuous 660 Hz	Swedish alarm signal	99	103	21
20	alternating 554/440 Hz in 0.5 Hz stroke		99	103	21
21	pulse 660 Hz in 1 Hz stroke	Swedish alarm signal	98	104	19
22	2,850 Hz pulse: 150 ms ON, 100 ms OFF	Pedestrian crossing GB	109	115	14
23	rising 800/970 Hz in 50 Hz stroke	Low frequency BS 5839 Part 1 1988	101	106	14
24	rising 2,400-2,850 Hz in 50 Hz stroke	High frequency	106	112	4
25	970 Hz pulse: 3 x 500 ms ON, 500 ms OFF, Pause 1.5 sec.	ISO 8201 Low frequency: Evacuation	101	105	26
26	2,850 Hz pulse: 3 x 500 ms ON, 500 ms OFF, Pause 1.5 sec.	ISO 8201 High frequency	109	115	25
27	970/800 Hz alternating: 1.5 s ON, 0.5 s OFF		96	105	17
28	alternating 800/970 Hz in 2 Hz stroke	FP 1063.1 -Telecoms/BS 5839-1: 2002	99	105	10
29	alternating 988/645 Hz in 2 Hz stroke		99	104	988 Hz cont. tone
30	alternating 510/610 Hz in 2 Hz stroke		97	102	510 Hz cont. tone
31	falling 1,200-300 Hz in 1 Hz stroke		99	104	13
32	alternating 510/610 Hz in 1 Hz stroke		97	102	510 Hz cont. tone

# 144 Multi-Tone Sounder



Base Mounting



Wall mounting

## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (L x H x W):	109 mm x 113 mm x 150 mm		
Housing:	PC/ABS-Blend		
Connection:	24 V: Screw terminal 0.5 - 1.5 mm <sup>2</sup> 115/230 V: CAGE CLAMP®		
Cable entry:	Membrane for cable diameter max. 13 mm		
Fixing:	Wall, base and ceiling mounting		
Tone types and frequencies:	Selectable via DIP switch, see table on page 184		
Voltage:	24 V AC/DC	115 V AC	230 V AC
Current consumption:	200 mA	55 mA	30 mA
Order No.:	<b>144 000 75</b>	<b>144 000 67</b>	<b>144 000 68</b>



## ❖ ACCESSORIES:

Cable gland M20 x 1.5 mm (for cable strain relief)

**975 444 01**

Protection rating IP 65 is provided even without cable gland

## ↔ TECHNICAL DIAGRAM:

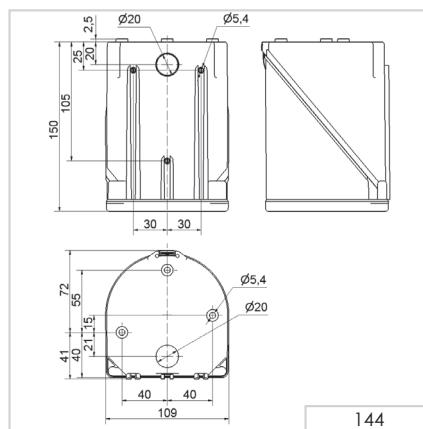



## 144 Tone table

The 144 Multi-Tone Sounder offers a large choice of internationally recognised signal tones for the widest spectrum of applications. 3 tones can be triggered externally.

<b>♪ TONE TYPES AND FREQUENCIES:</b>							
<b>Tone 1</b>	<b>Tone type</b>	<b>Frequency (Hz)</b>	<b>Description</b>	<b>Use</b>	<b>Tone 2</b>	<b>Tone 3</b>	<b>Output (dB)</b>
1	continuous	200		BS 5839-1:2002	440 Hz cont.	554 Hz cont.	97
2	rising	800 & 970	7 Hz		14	800 Hz cont.	102
3	rising	800 & 970	1 Hz		14	800 Hz cont.	103
4	continuous	2850	3 s, then 0.5 s OFF (then repeat)		14	9	104
5	rising	2400 - 2850	7 Hz		4	2400 Hz cont.	109
6	rising	2400 - 2850	1 Hz		4	2400 Hz cont.	110
7	rising	500 - 1200	3 s, then 0.5 s OFF (then repeat)		14	8	106
8	falling	1200 - 500	1 Hz	DIN 33404-3	14	7	104
9	alternating	2400 & 2850	2 Hz		4	2400 Hz cont.	111
10	pulse	970	0.5 Hz (1 s On/1 s Off)	BS 5839 Part 1 1988	14	800 Hz cont.	101
11	alternating	800 & 970	1 Hz	BS 5839 Part 1 1988	14	800 Hz cont.	105
12	pulse	2850	0.5 Hz		4	22	104
13	pulse	970		0,25 s On/1 s Off	14	800 Hz cont.	98
14	continuous	970		BS 5839-1:2002 PFEER - Toxic gas	10	8	102
15	alternating	554 & 440		France NFS	14	800 Hz cont.	101
16	pulse	660	150 ms On/150 ms Off	Swedish	16	14	96
17	pulse	660	1.8 s On/1.8 s Off	Swedish	17	14	98
18	pulse	660	6.5 s On/13 s Off	Swedish	18	14	98
19	continuous	660		Swedish	19	31	98
20	alternating	554 & 440	0.5 Hz		20	19	102
21	pulse	660	1 Hz	Swedish	21	4	97
22	pulse	2850	150 ms On/100 ms Off	GB	14	4	104
23	rising	800 - 970	50 Hz (low)	BS 5839 Part 1 1988	14	800 Hz cont.	102
24	rising	2400 - 2850	50 Hz (high)		4	2400 Hz cont.	109
25	pulse	970	3 x 500 ms ON/500 ms OFF / 1.5 s silence, then repeat (low)	ISO 8201 US Temporal	26	14	101
26	pulse	2850	3 x 500 ms ON/500 ms OFF / 1.5 s silence, then repeat (high)	ISO 8201 US Temporal	25	4	104
27	continuous	4000			27	6	92
28	rising	2000 - 2850	7 Hz		2000 Hz cont.	4	111
29	alternating	988 & 645	2 Hz		988 Hz cont.	645 Hz cont.	102
30	alternating	510 & 610	2 Hz		510 Hz cont.	610 Hz cont.	102
31	alternating	800 & 970	2 Hz	5839-1:2002	800 cont.	14	105
32	alternating	800 & 1200	1 Hz		800 cont.	1200 Hz cont.	105

# Vocal alarm

## Your benefits

This extremely loud Vocal Alarm provides the ability to play application-specific audio files in order to produce clear and targeted instructions. It is particularly suitable for large assembly facilities and can address defined groups of people (for example, a particular work unit) in a targeted manner.

- Reliable alarm output over long distances or in noisy environments
- Easy to adjust to local conditions
- Excellent audio and sound quality for optimum clarity of signalling
- Completely flexible; select the audio file yourself

## Typical applications

Signalling faults or issuing specific instructions

- For areas with high ambient noise levels
- In production and assembly environments

## Installation options

- Wall mounting

## Features

- Plays customer-specific audio files (sounds, melodies and your own recorded messages)
- 15 files can be played, or a sequence with a maximum of 50 files
- Simple USB data transfer
- Sound output can be externally triggered up to 110 dB






Vocal alarm 154

## 154 Vocal alarm



### ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (L x H x W):	111 mm x 98 mm x 111 mm
Housing:	PP-GF, PC/ABS Blend
Sound output:	Adjustable, up to 110 dB
File Transfer:	Via USB connection and provided software
Possible data format:	mp3 and wav files
Number of sequences:	15 files can be remotely triggered or one sequence with max. 50 files
Suitable for:	Windows®, System requirements - see Handbook
Assembly:	Vocal alarm, USB connection cable and software
Voltage:	24 V DC
Current consumption:	< 500 mA Low Power < 1500 mA High Power
Order No.:	<b>154 000 55</b>

### ↔ TECHNICAL DIAGRAM:

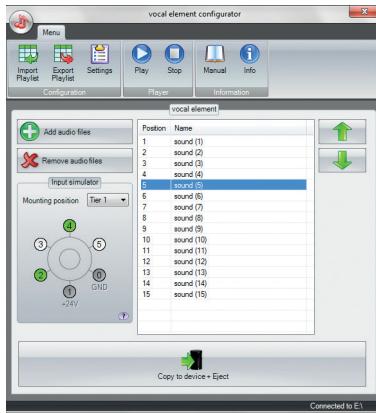

User-friendly software ensures easy transfer of audio files and simple operation

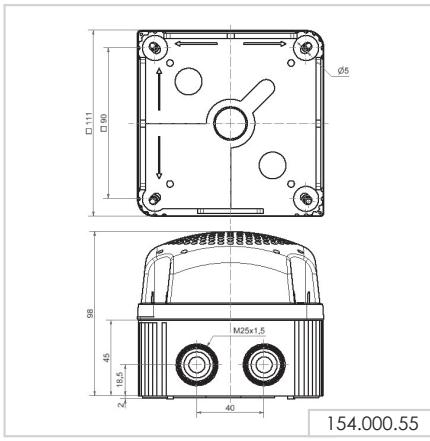

# Heavy Duty Multi-Tone Sounder

## Your benefits

The robust housings of WERMA Heavy Duty Multi-Tone Sounders are particularly well-suited for use in public areas or in harsh industrial environments. Versions with an aluminium housing and separate certification (German Lloyd) are available for marine applications.

- Ideal in extremely noisy environments and over long distances
- Many application options with up to 42 tones
- Up to 3 tones can be externally triggered for the escalation of signals
- Includes standardised tones (including those used in fire alarms)

## Typical applications

Signalling of faults and alarms

- outdoors in extreme conditions
- in larger industrial plants
- in maritime applications

## Installation options

- Wall mounting

## Features

- High protection rating up to IP67
- Multi-voltage versions allow multiple applications with a single device





# 129 Electronic Multi-Tone Sounder (110 dB)



## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (L x H x W):	143 mm x 161 mm x 161 mm		
Housing:	Die-cast aluminium		
Connection:	Screw terminal 0.5 - 2.5 mm <sup>2</sup>		
Cable entry:	Cable gland M20 x 1.5 mm Cable diameter 8-12 mm		
Tone types and frequencies:	Selectable via DIP switch, see table page 189		
Voltage:	24 V DC	115 V AC	230 V AC
Current consumption:	400 mA	120 mA	60 mA
Order No.:	<b>129 052 55</b>	<b>129 052 67</b>	<b>129 052 68</b>

## ↔ TECHNICAL DIAGRAM:

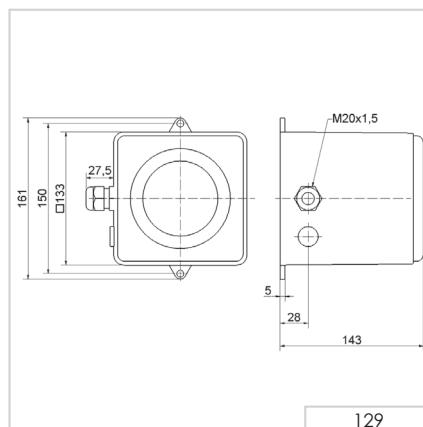

# 129 Tone table

The 129 Multi-Tone Sounder offers a large choice of internationally recognised signal tones for the widest spectrum of applications.

<b>♪ TONE TYPES AND FREQUENCIES:</b>		
<b>Tone 1+2 No.</b>	<b>Tone type</b>	<b>Description</b>
1	falling 1,200-500 Hz in 1 Hz stroke	DIN 33404
2	950 Hz pulse: 3 x 500 ms ON, 500 ms OFF, Pause 1.5 sec.	ISO 8201
3	alternating 825 Hz/1,025 Hz in 2 Hz stroke	
4	continuous 950 Hz	
5	950 Hz pulse: 1 sec. ON, 1 sec. OFF	
6	500-1,200 Hz rising and falling in 3 sec.	Siren
7	554 Hz/100 ms alternating 440 Hz/400 ms	French fire alarm signal AFNOR NFS 32 S 32-001
8	pulse 700 Hz: 150 ms ON, 150 ms OFF, cycle 1 Min.	
9	pulse 800 Hz: 4 ms ON, 4 ms OFF	
10	continuous 500 Hz	
11	continuous 725 Hz	
12	continuous 825 Hz	
13	continuous 1,250 Hz	
14	continuous 1,500 Hz	
15	pulse 500 Hz: 500 ms ON, 500 ms OFF	
16	pulse 825 Hz: 500 ms ON, 500 ms OFF	
17	pulse 725 Hz: 0.7 sec. ON, 0.3 sec. OFF	
18	pulse 800 Hz: 0.25 sec. ON, 1 sec. OFF	
19	alternating 800 Hz/1,000 Hz in 2 Hz stroke	
20	pulse 825 Hz: 2.5 sec. ON, 2.5 sec OFF x 7, then 7 sec. pulse	
21	pulse 950 Hz: 1 sec. ON, 1 sec. OFF, 3 sec. ON, 1 sec. OFF	
22	rising 500-1,200 Hz in 3 sec., 0.5 sec OFF	
23	rising 500-2,400 Hz in 3 sec.	
24	alternating 825 Hz/1,075 Hz in 1 Hz stroke	
25	alternating 500 Hz/900 Hz in 2 Hz stroke	
26	alternating 1,200 Hz/1,400 Hz in 25 Hz stroke	
27	rising 300-1,200 Hz in 3 sec.	
28	700-1,500 Hz rising and falling in 3 sec.	
29	rising 150-1,000 Hz in 10 sec., 40 sec. ON, falling in 10 sec.	
30	pulse 680 Hz: 0.875 sec. ON, 0.875 sec. OFF	
31	rising 1,400-1,600 Hz in 1 sec., falling in 0.5 sec.	





# 139 Electronic Multi-Tone Sounder (105 dB)

## ⓘ TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (L x H x W):	136 mm x 108 mm x 119 mm	
Housing:	ABS	
Connection:	Screw terminal 0.5 - 2.5 mm <sup>2</sup>	
Cable entry:	Cable gland M20 x 1.5 mm (not included in assembly)	
Tone types and frequencies:	Selectable via DIP switch	
Voltage:	9-60 V DC	115/230 V AC
Current consumption:	15 mA (24V)	20 mA (230 V)
red	<b>139 000 55</b>	<b>139 000 68</b>
grey	<b>139 100 55</b>	<b>139 100 68</b>


## ⚒ ACCESSORIES:

Cable gland M20 x 1.5 mm **975 444 01**

## ⌈ TONE TYPES AND FREQUENCIES:

For further details see [www.werma.com](http://www.werma.com).

## ↔ TECHNICAL DIAGRAM:

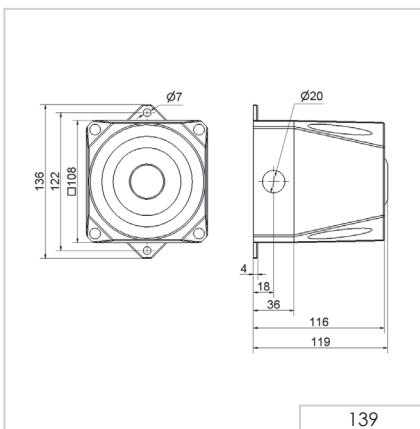

139



# 141 Electronic Multi-Tone Sounder (110 dB)



## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (L x H x W):	165 mm x 136 mm x 132 mm	
Housing:	PC/ABS-Blend	
Connection:	Screw terminal 0.5 - 2.5 mm <sup>2</sup>	
Cable entry:	Cable gland M20 x 1.5 mm (not included in assembly)	
Tone types and frequencies:	Selectable via DIP switch	
Voltage:	9-60 V DC	115/230 V AC
Current consumption:	120 mA (24V)	22 mA (230 V)
red	<b>141 000 55</b>	<b>141 000 68</b>
grey	<b>141 100 55</b>	<b>141 100 68</b>


## ❖ ACCESSORIES:

Cable gland M20 x 1.5 mm **975 444 01**

## ♪ TONE TYPES AND FREQUENCIES:

For further details see [www.werma.com](http://www.werma.com).

## ↔ TECHNICAL DIAGRAM:

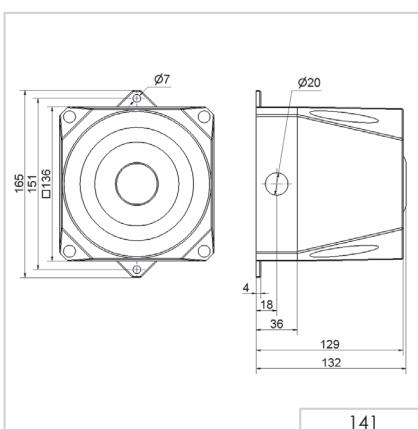

# 142 Electronic Multi-Tone Sounder (120 dB)



## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:


Dimensions (L x H x W):	168 mm x 168 mm x 155 mm	
Housing:	PC/ABS-Blend	
Connection:	Screw terminal 0.5 - 2.5 mm <sup>2</sup>	
Cable entry:	Cable gland M20 x 1.5 mm (not included in assembly)	
Tone types and frequencies:	Selectable via DIP switch, see table on page 193	
Voltage:	18-30 V DC	115/230 V AC
Current consumption:	450 mA	130 mA (115 V) / 65 mA (230 V)
red	<b>142 000 55</b>	<b>142 000 68</b>
grey	<b>142 100 55</b>	<b>142 100 68</b>

## ❖ ACCESSORIES:

Cable gland M20 x 1.5 mm **975 444 01**



## ↔ TECHNICAL DIAGRAM:

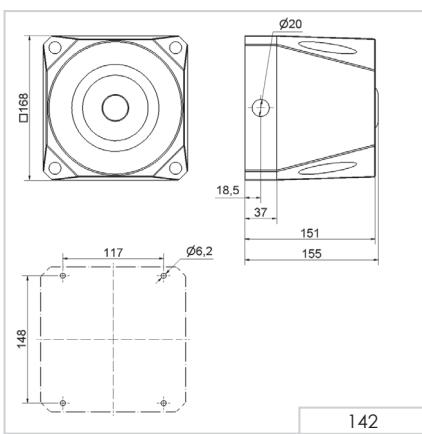

# 142 Tone table

The 142 Multi-Tone Sounder offers a large choice of internationally recognised signal tones for the widest spectrum of applications. The first two tones can be freely chosen. The third tone is paired with the second tone.

<b>♪ TONE TYPES AND FREQUENCIES:</b>				
<b>Tone 1+2 No.</b>	<b>Tone type</b>	<b>Description</b>	<b>Output (dBA)</b>	<b>Tone 3</b>
1	alternating 800/970 Hz in 2 Hz stroke (250 ms-250 ms)		120	14
2	rising 800/970 Hz in 7 Hz stroke (7/s)		120	14
3	rising 800/970 Hz in 1 Hz stroke (1/s)		120	14
4	continuous 2,850 Hz		111	9
5	rising 2,400-2,850 Hz in 7 Hz stroke		109	4
6	rising 2,400-2,850 Hz in 1 Hz stroke		110	4
7	500-1,200 Hz rising in 3 sec., 0.5 sec. OFF	Slow Whoop Holland	119	14
8	falling 1,200-500 Hz in 1 Hz stroke	DIN/PFEER (PAPA), DIN 33404-3, VDS tested	119	14
9	alternating 2,400/2,850 Hz in 2 Hz stroke (250 ms-250 ms)		119	14
10	pulse 970 Hz in 0.5 Hz stroke (1 sec. ON / 1 sec. OFF)	PFEER Alarm	113	4
11	alternating 800/970 Hz in 1 Hz stroke (500 ms-500 ms)		117	14
12	pulse 2,850 Hz in 0.5 Hz stroke (1 sec. ON / 1 sec. OFF)		118	144
13	970 Hz pulse: 0.25 sec. ON / 1 sec. OFF		112	14
14	continuous 970 Hz	PFEER - Toxic gas	117	8
15	554 Hz/100 ms alternating 440 Hz/400 ms	French alarm signal AFNOR NFS 32 S 32-001	118	14
16	660 Hz pulse: 150 ms ON, 150 ms. OFF	Swedish alarm signal	115	14
17	660 Hz pulse: 1.8 sec. ON, 1.8 sec. OFF	Swedish alarm signal	114	14
18	660 Hz pulse: 6.5 sec. ON, 13 sec. OFF	Swedish alarm signal	115	14
19	continuous 660 Hz	Swedish alarm signal	116	1
20	alternating 554/440 Hz in 0.5 Hz stroke (1 sec. ON / 1 sec. OFF)	Swedish alarm signal	115	19
21	pulse 660 Hz in 1 Hz stroke (500 ms-500 ms)	Swedish alarm signal	115	4
22	pulse 2,850 Hz in 4 Hz stroke (150 ms ON / 100 ms OFF)		110	4
23	rising 800-970 Hz in 50 Hz stroke		117	14
24	rising 2,400-2,850 Hz in 50 Hz stroke		110	4
25	970 Hz pulse: 3 x 500 ms. ON, 500 ms OFF, break 1.5 sec.	ISO 8201 / US Temporal	118	14
26	2,850 Hz pulse: 3 x 500 ms. ON, 500 ms OFF, break 1.5 sec.	ISO 8201 / US Temporal	112	4
27	continuous 4,000 Hz		105	6
28	alternating 800/970 Hz in 2 Hz stroke (250 ms-250 ms)		118	14
29	alternating 990/650 Hz in 2 Hz stroke (250 ms-250 ms)		117	14
30	alternating 510/610 Hz in 2 Hz stroke (250 ms-250 ms)		116	14
31	rising 300-1,200 Hz in 1 Hz stroke		118	14
32	continuous Bell		117	3
33	continuous Bell: 3x500 ms. Pulse, 1.5 sec. Silence, then repeat	Bell / US Temporal	117	14
34	alternating 1,000/2,000 Hz in 1 Hz stroke (500 ms-500 ms)	Singapore	115	4
35	pulse 420 Hz (0,625 sec.)	Australian alarm signal	118	14
36	500-1,200 Hz rising in 3,75 sec., then 0,25 sec. OFF	Australian alarm signal (Evacuation)	117	14
37	rising 1,400-1,600 Hz in 1 sec., falling in 0.5 sec.	NF C 48-265	116	14
38	500-1,200 Hz rising and falling 3 sec.	Siren	117	14
39	pulse 720 Hz: 0.7 sec. ON, 0.3 sec. OFF	German industrial alarm	118	14
40	rising 422-775 Hz in 0.85 sec., 1 sec. silence, then repeat	NFPA Whoop	118	14
41	continuous 470 Hz	Horn (USA)	114	3
42	continuous 370 Hz	Air Horn (USA)	113	3



# Alarm Bell

## Your benefits

A signalling technology classic: The robust WERMA Alarm Bell for signalling break-time or machine activation warnings.

- Many application possibilities
- Robust housing prevents damage when used in public areas or in harsh industrial environments

## Typical applications

As a bell or alarm

- Goods receiving areas
- Entry/exit applications
- Counter service call point, etc.

## Installation options

- Wall mounting

## Features

- High IP66 protection rating for outdoor use




## 914 Alarm Bell



### ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Depth):	167 mm x 76 mm	
Housing:	Steel bell, epoxy powder coated	
Connection:	Screw terminal max. 1.5 mm <sup>2</sup>	
Cable entry:	Cable gland M16 x 1.5 mm Cable diameter 5-10 mm	
Voltage:	24 V DC	110 V AC (50/60 Hz)
Current consumption:	300 mA	90 mA
Order No.:	<b>914 052 55</b>	<b>914 052 67</b>
		<b>914 052 68</b> (50 Hz)

### ↔ TECHNICAL DIAGRAM:

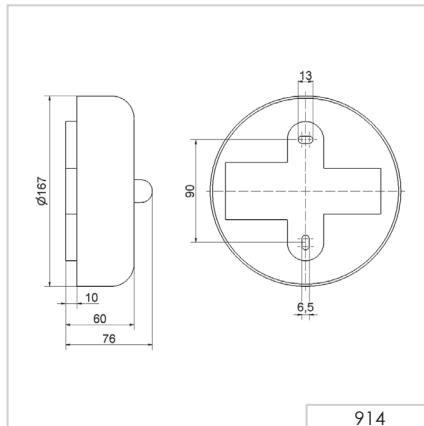


914



at DC - 98 dB(A)  
at AC - 100 dB(A)

Optische & Akustische  
Kombinationen



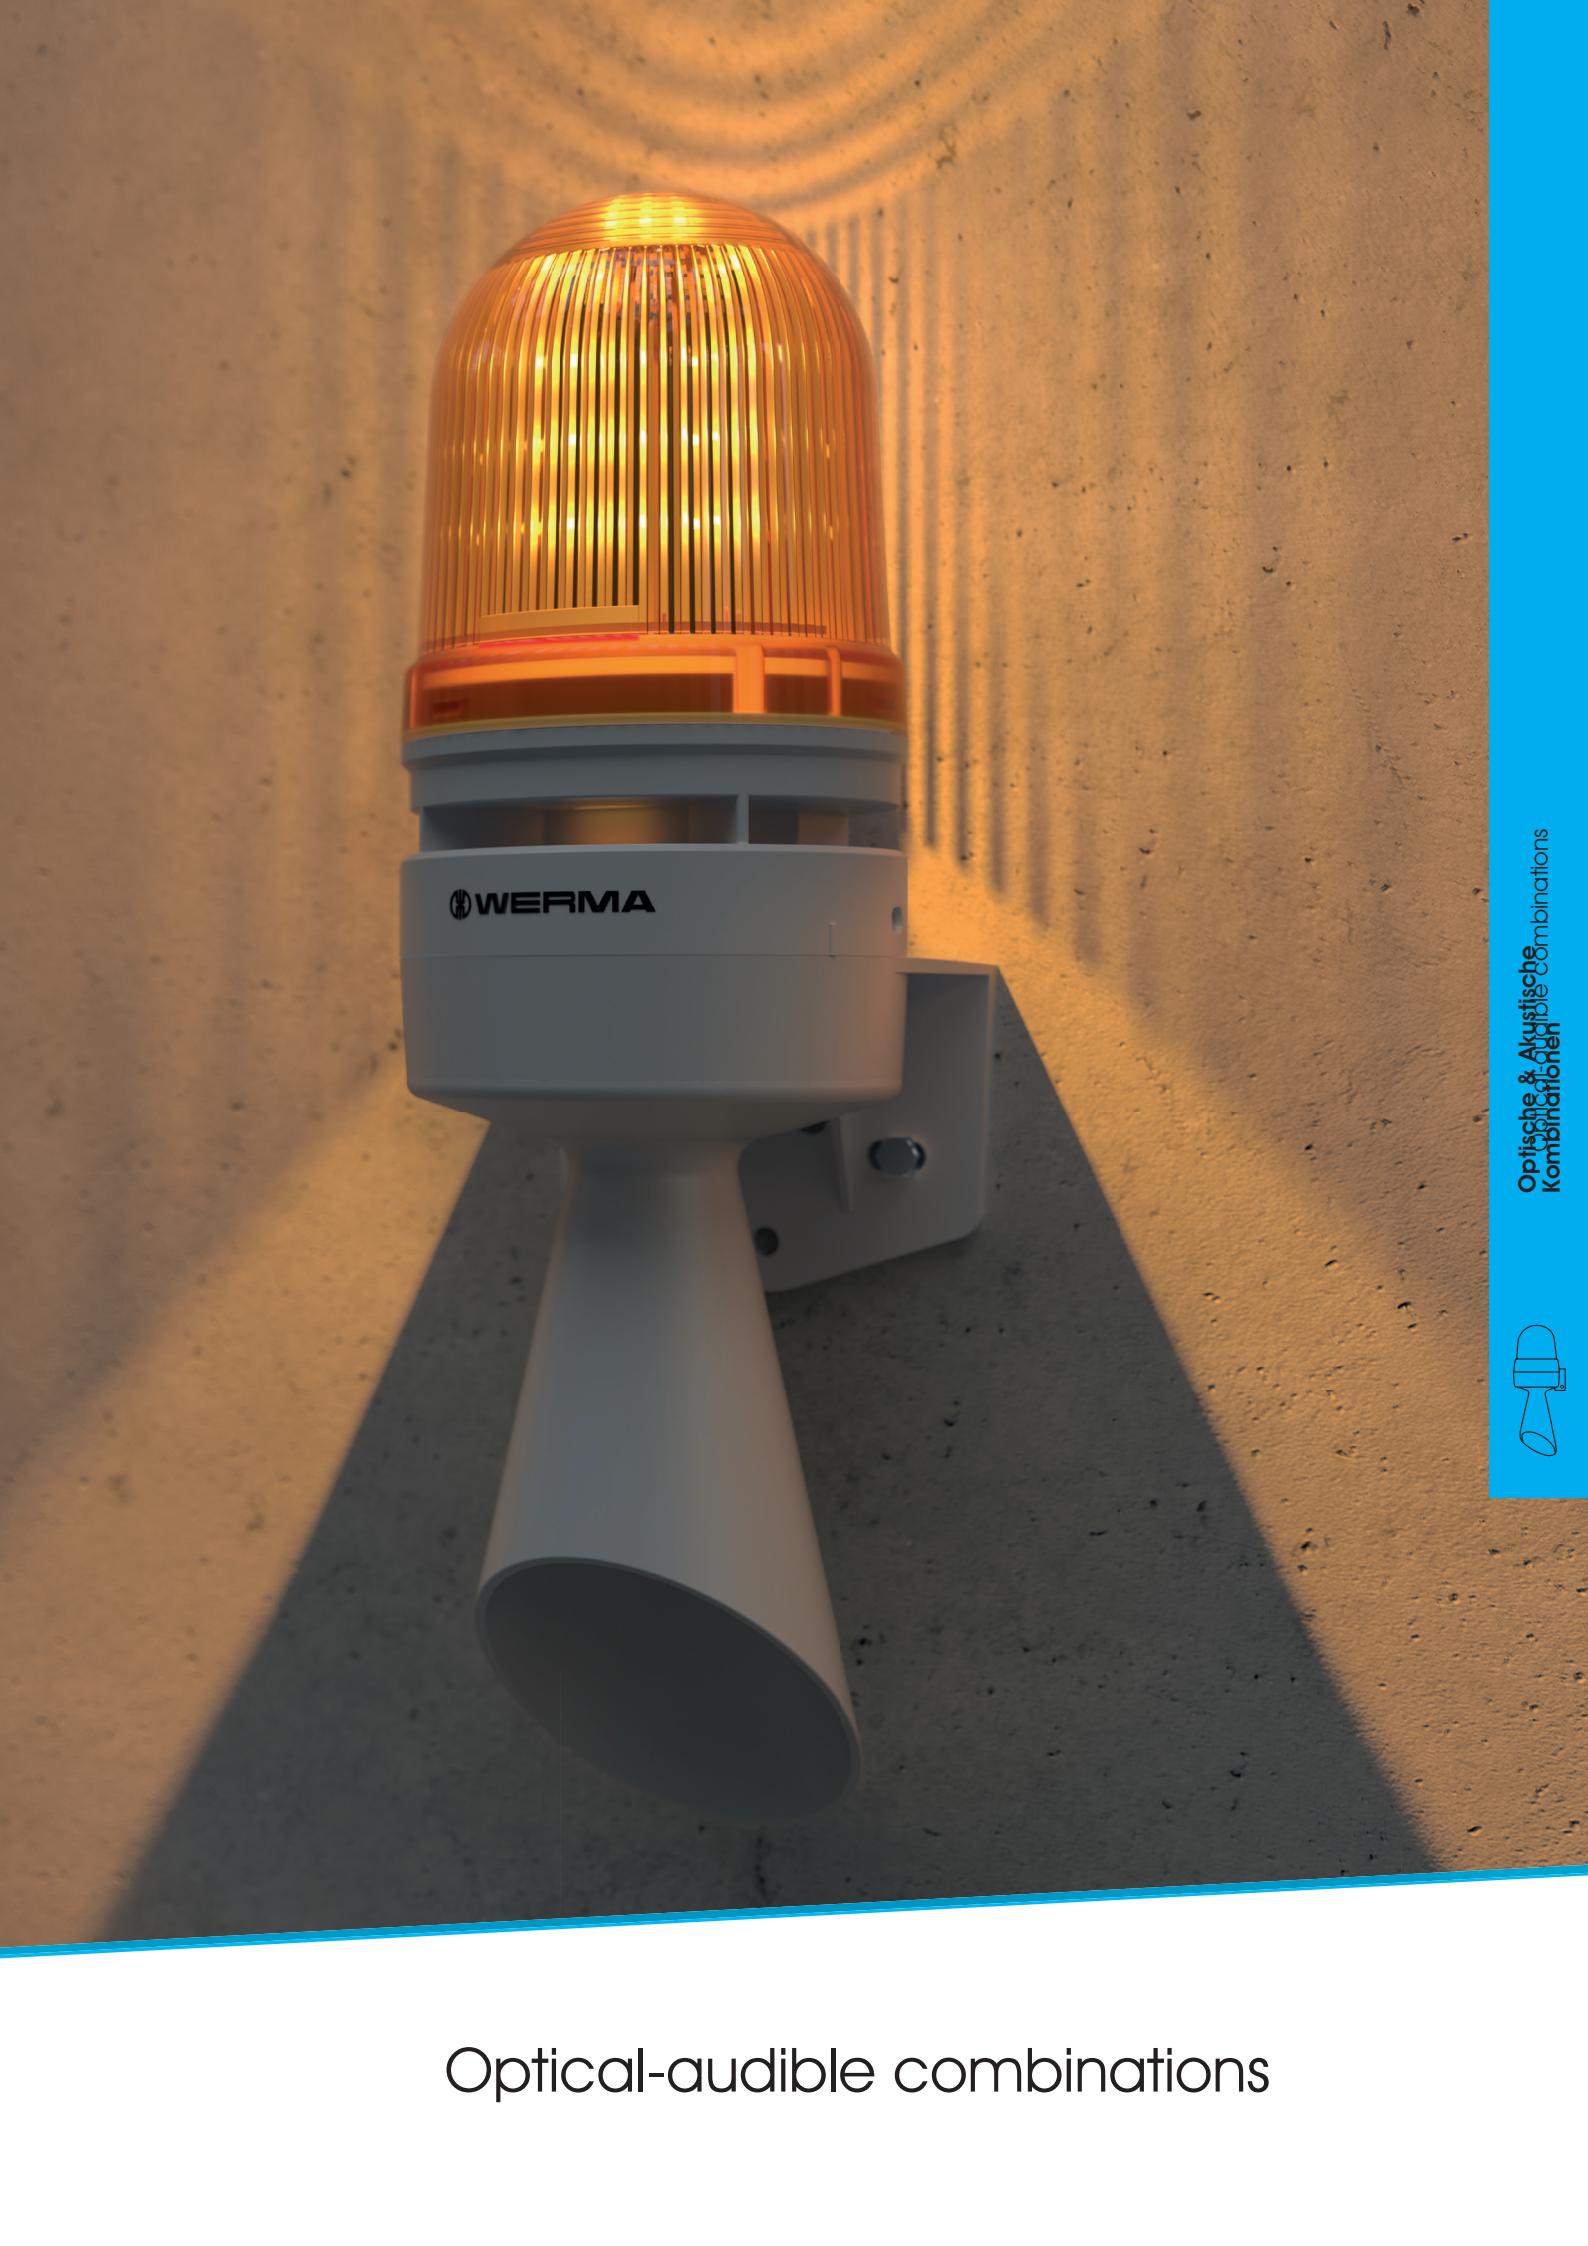

Optical-audible combinations

Optische & Akustische  
Kombinationen



# Overview Optical and Audible Combinations

## Double the safety with optical-audible signals

Large systems are often managed by only a few people, especially in automated production facilities and large machine shops. This results in optical signals not always being in the machine operator's immediate field of vision. In such cases, an audible signal may also be used. The use of both optical and audible alarms will help to counter an audible alarm not always being heard above an ambient noise level.

Overview Optical and Audible Combinations							
Product type		Installation	Free-standing	Free-standing	Free-standing	Free-standing	Free-standing
Mounting	Product range	Installation Combinations	EvoSIGNAL Mini	EvoSIGNAL Midi	Combinations	Design Combinations	Heavy Duty Combinations
Dimensions (Ø x Height)*		50 x 22 mm	62 x 85 mm	85 x 130 mm	146 x 171 mm 134 x 235 mm	-	
Dimensions (L x H x W)		-	-	-	134 x 407 x 144 mm	109 x 112,5 x 152 mm	136 x 138 x 119 mm 165 x 169 x 132 mm 168 x 211 x 155 mm
Voltage	12 V		●	●			●
	24 V	●	●	●	●	●	●
	60 V						●
	115 V	●	●	●	●	●	●
	230 V	●	●	●	●	●	●
Protection rating		IP65	IP66	IP66	IP65	IP65	IP66
Page		Page 200	Page 211	Page 214	Page 217	Page 223	Page 227

\* Technical diagrams can be found on the product page


## Variety of signals

WERMA supplies a large number of audible signals which can also be enhanced with the addition of optical light signals.

AUDIBLE SIGNALS: Sirens and Multi-Tone Sounder, Buzzer and Horns

OPTICAL SIGNALS: (LED) Permanent Light, Flashing Light, LED Double Flash Light, LED EVS Signal, LED Permanent/Flash/EVS Light

## Size comparison

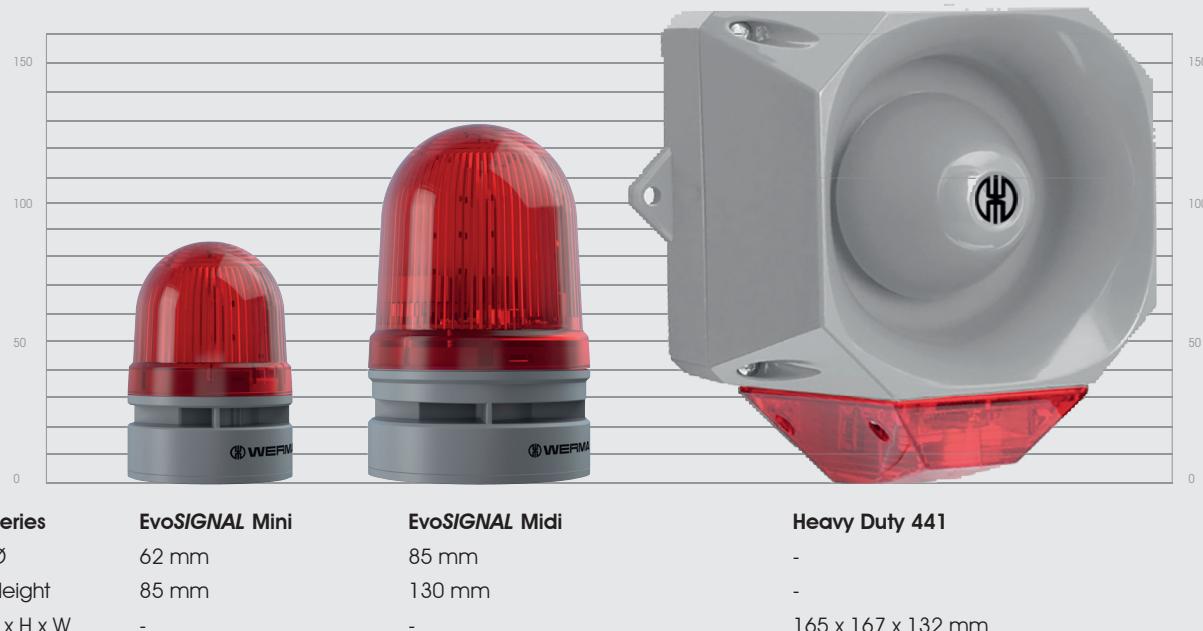

# Installation Combination Beacon with Buzzer

## Your benefits

Optical audible Installation Combinations give excellent all-round visibility of the signal and are an industry standard for easy installation in control panels.

- Easy to install
- Tamper-proof when installed
- Minimal protrusion from panel for installations where space is limited
- Acknowledgement function promotes faster response time and fault repair (450 series)

## Typical applications

Fault signalling

- in control panels

## Installation options

- Installation mounting

## Features

- High IP65 protection rating for outdoor applications
- Standard M22 for control panel installation
- Proven piezo technology for extended life duration
- Easy to connect using a plug-in connection (150)
- LED permanent light with continuous tone that can be additionally activated (150)



Size comparison Installation /  
EvoSIGNAL Mini and Midi



# 150 LED Permanent Light / Buzzer Combination




LED Permanent light with continuous tone that can be additionally activated



## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height):	50 mm x 22 mm (Protrusion from panel)		
Housing:	PC/ABS-Blend		
Lens:	PC, transparent		
Connection:	Connector plug with screw terminal max. 1.5 mm <sup>2</sup>		
Tone type:	Continuous		
Tone frequency:	c. 2.8 kHz		
Duty cycle:	100 %		
Life duration:	Up to 50,000 hrs		
Fixing:	Installation mounting for Ø 22.5 mm (M22 x 1.5 mm) with anti-twist device		
Nut and seal included in assembly.			
Voltage:	24 V DC	115 V AC	230 V AC
Current consumption:	< 50 mA	< 20 mA	< 20 mA
red	<b>150 100 55</b>	<b>150 100 67</b>	<b>150 100 68</b>
yellow	<b>150 300 55</b>	<b>150 300 67</b>	<b>150 300 68</b>

## ↔ TECHNICAL DIAGRAM:

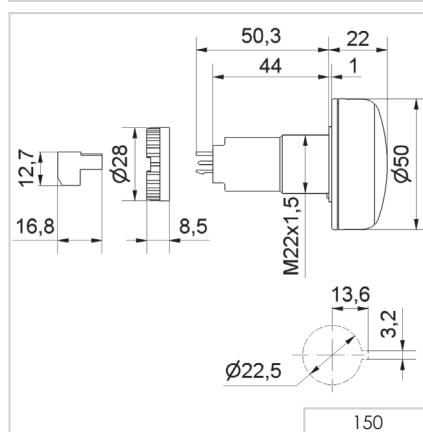

24 V

PLC

# 450 LED Permanent Light/Buzzer Combination with acknowledgement function



LED Permanent light with continuous tone that can be additionally activated




## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height):	50 mm x 22 mm (Protrusion from panel)	
Housing:	PC/ABS-Blend	
Lens:	PC, transparent	
Connection:	Screw terminal 1.5 mm <sup>2</sup>	
Signal input:	24 V DC	
Acknowledgement output:	Semiconductor- Relay	U <sub>max</sub> = 30 V I <sub>max</sub> = 100 mA R <sub>ON</sub> max = 25 Ohm
Tone type:	Continuous	
Tone frequency:	c. 2.8 kHz	
Duty cycle:	100 %	
Life duration:	Up to 50,000 hrs	
Fixing:	Installation mounting for Ø 22.5 mm (M22 x 1.5 mm)	
Nut and seal included in assembly.		
Voltage:	24 V DC	
Current consumption:	80 mA	
red	<b>450 100 55</b>	
yellow	<b>450 300 55</b>	


## ! ADDITIONAL INFORMATION:




The audible signal can be turned off in seconds by lightly pressing the front of the product

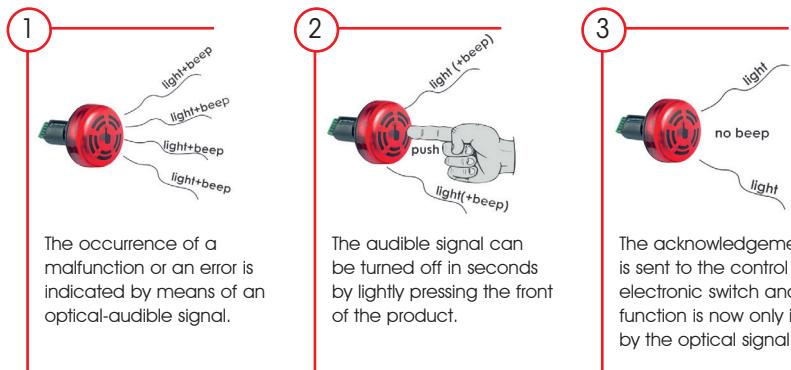

## ↔ TECHNICAL DIAGRAM:

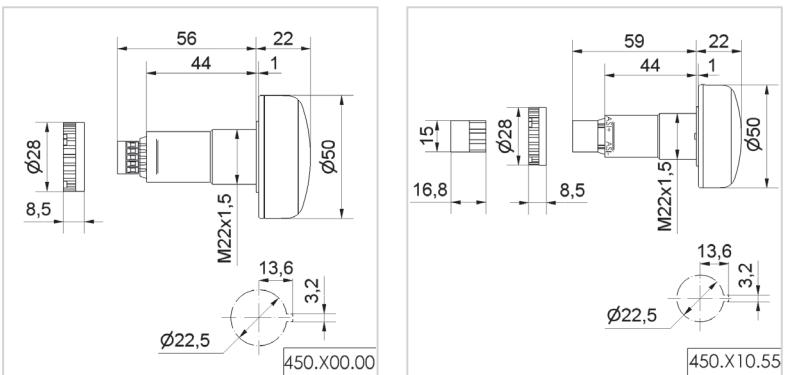

450.X10.55



# 241 LED Installation Beacon (MC35) with UL




## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS

Dimensions (Ø x Height)	35 mm x 64 mm (Protrusion from panel)	
Housing	PC, black	
Lens	PC, transparent	
Fixing	Installation mounting M22	
Connection	M12 5 PIN	
Colour options	Red, yellow, green, white, blue, violet, turquoise (Multicolour) Red, yellow, green (Tricolour)	
Light effects	Permanent light	
Tone types and frequency	Continuous tone, 3400 Hz	
Life duration light	Up to 50,000 hrs	
Life duration buzzer	Up to 5,000 hrs	
<b>Version with UL</b>	<b>Voltage</b>	<b>Current consumption</b>
Tricolour (RGY)	24 V DC	32 mA
Multicolour (RGB)	10-30 V DC	70 mA
		<b>241 440 55</b>
		<b>241 340 50</b>

## MC35 IO-Link


Connection	M12 4 PIN
Colour options	Multicolour LED, configurable colours > 1 million colours
Light effects	Permanent, blinking, flashing and pulse light
Tone types and frequency	10 tones (Permanent, Pulse, Sweep, Alternating)
Voltage	18-30 V DC
Current consumption	30 mA
Order no.	<b>241 510 01</b>

## ↔ TECHNICAL DIAGRAM

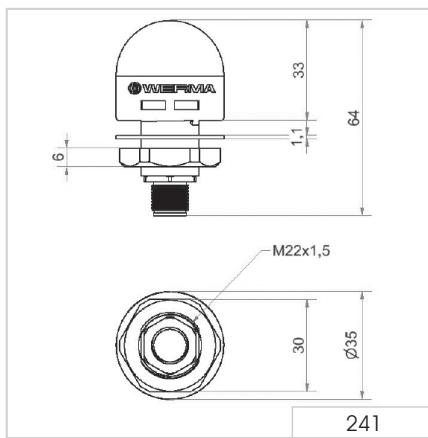



Optical-audible combinations

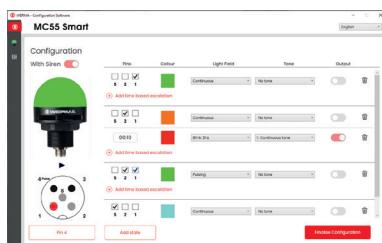

Configuration software for the Smart version



## 240 LED Installation Beacon (Multicolour/MC55) with or without UL

### ⓘ TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS


Dimensions (Ø x Height)	55 mm x 46 mm (Protrusion from panel)		
Housing	PC/ABS-Blend, black PC, black (version with UL)		
Lens	PC, transparent		
Fixing	Installation mounting M30		
Colour options	Red, yellow, green, white, blue, violet, turquoise (Multicolour) Red, yellow, green (Tricolour)		
Light effects	Permanent light, permanent and blinking light (1Hz) (240 130 50)		
Tone types and frequency	Pulse tone, 3400 Hz		
Life duration LED	Up to 50,000 hrs		
Life duration buzzer	Up to 5,000 hrs		
<b>Without UL</b>	Voltage	Current consumption	Plug M12
Tricolour (RGY)	24 V DC	45 mA	<b>240 240 55</b>
Multicolour (RGB)	10-30 V DC	80 mA	<b>240 140 50</b>
<b>Version with UL</b>	Voltage	Current consumption	Plug M12
Tricolour (RGY)	24 V DC	65 mA	<b>240 440 55</b>
Multicolour (RGB)	10-30 V DC	105 mA	<b>240 340 50</b>

## 240 LED Installation Beacon (Multicolour/MC55 Smart) with UL


### ⓘ TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS

Dimensions (Ø x Height)	55 mm x 46 mm (Protrusion from panel)		
Housing	PC black		
Lens	PC, transparent		
Fixing	Installation mounting M30		
Connection	M12 5 PIN		
Colour options	Multicolour LED, configurable colours > 1 million colours		
Light effects	Permanent, blinking, flashing and pulse light		
Tone types and frequency	10 tones (Permanent, Pulse, Sweep, Alternating)		
Life duration LED	Up to 50,000 hrs		
Life duration buzzer	Up to 5,000 hrs		
Output current	max. 200 mA		
Output	Pulse feedback, 24 V switching		
Voltage	24 V DC		
Current consumption	max. 135 mA		
Order no.	<b>240 520 01</b>		


### ↔ TECHNICAL DIAGRAM:



240.440.55  
240.340.50  
240.520.01



UL



# 240 LED Installation Beacon (Multicolour/MC55 IO-Link)



## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS

Dimensions (Ø x Height)	55 mm x 46 mm (Protrusion from panel)
Housing	PC black
Lens	PC, transparent
Fixing	Installation mounting M30
Connection	M12 4 PIN
Colour options	Red, yellow, green, white, blue, violet, turquoise (Multicolour)
Light effects	Permanent, blinking, flashing and pulse light
Tone types and frequency	10 tones (Permanent, Pulse, Sweep, Alternating)
Life duration LED	Up to 50,000 hrs
Life duration buzzer	Up to 5,000 hrs
Voltage	18-30 V DC
Current consumption	60 mA
Order no.	<b>240 510 01</b>


## 240 LED Beacon (Multicolour/MC55) Tube and base mounting



## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS

Dimensions (Ø x Height)	55 mm x 71 mm		
Housing	PC black		
Lens	PC, transparent		
Fixing	Installation mounting M30		
Connection	M12 5 PIN		
Colour options	Red, yellow, green, white, blue, violet, turquoise (Multicolour) Red, yellow, green (Tricolour)		
Light effects	Permanent light		
Tone types and frequency	Pulse tone, 3400 Hz		
Life duration LED	Up to 50,000 hrs		
Life duration buzzer	Up to 5,000 hrs		
Voltage	Current consumption		
Multicolour (RGB)	10-30 V DC	67 mA	<b>240 500 01</b>
Tricolour (RGY)	24 V DC	60 mA	<b>240 500 03</b>

## ↔ TECHNICAL DIAGRAM:

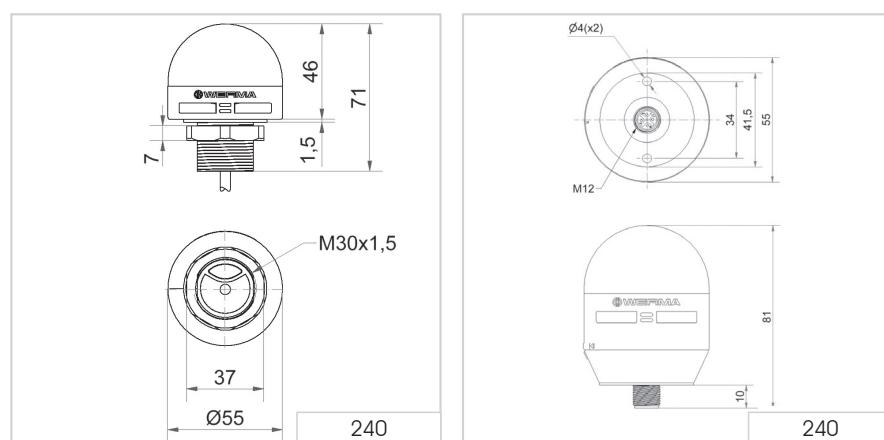



## 240 LED Installation Beacon (Multicolour/MC55 Touch)

### ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS


Dimensions (Ø x Height)	55 mm x 44 mm (Protrusion from panel)			
Housing	PC, black			
Lens	PC, transparent			
Fixing	Installation mounting M22			
Connection	M12 5 PIN			
Colour options	Red, yellow, green (Tricolour)			
Light effects	Permanent light			
Tone types and frequency	Continuous tone, 3480 Hz			
Output current	max. 200 mA			
Output	Puls Feedback			
Life duration light	Up to 50,000 hrs			
Life duration buzzer	Up to 5,000 hrs			
	Voltage	Current consumption	NPN	PNP
Tricolour (RGY)	24 V DC	max. 200 mA	<b>240 270 55</b>	<b>240 290 55</b>

## 240 LED Installation Beacon (Multicolour/MC55 Touch Smart)

### ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS

Dimensions (Ø x Height)	55 mm x 44 mm (Protrusion from panel)		
Housing	PC, black		
Lens	PC, transparent		
Fixing	Installation mounting M22		
Connection	M12 5 PIN		
Colour options	Red, yellow, green, white, blue, violet, turquoise (Multicolour)		
Light effects	Permanent, Blinking, Flashing and Pulse light		
Tone types and frequency	10 tones (Continuous, Pulse, Sweep, Alternating)		
Output current	max. 200 mA		
Output	Pulse Feedback, commutation 24 V		
Life duration light	Up to 50,000 hrs		
Life duration buzzer	Up to 5,000 hrs		
	Voltage	Current consumption	M12 connector
Multicolour (RGY)	24 V DC	max. 200 mA	<b>240 170 55</b>

### ↔ TECHNICAL DIAGRAM

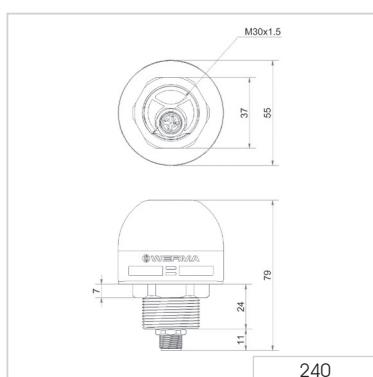


# 240 LED Installation Beacon (Multicolour/MC55 Touch IO-Link)



## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS

Dimensions (Ø x Height)	55 mm x 44 mm (Protrusion from panel)
Housing	PC black
Lens	PC, transparent
Fixing	Installation mounting M22
Connection	M12 4 PIN
Colour options	Multicolour LED, configurable colours > 1 million colours
Light effects	Permanent, Blinking, Flashing and Pulse light
Tone types and frequency	10 tones (Continuous, Pulse, Sweep, Alternating)
Output	Feedback via IO-Link process data
Life duration light	Up to 50,000 hrs
Life duration buzzer	Up to 5,000 hrs
Voltage	18-30 V DC
Current consumption	60 mA
Order no.	<b>240 510 03</b>

## ↔ TECHNICAL DIAGRAM

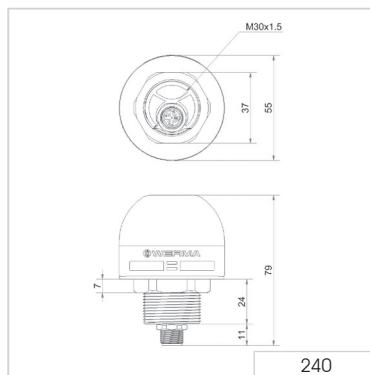



## 240 LED Beacon Multicolour MC55 High Tube and base mounting

### ⓘ TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS

Dimensions (Ø x Height)	55 mm x 111 mm
Housing	PC black
Lens	PC, transparent
Fixing	Installation mounting M30
Connection	M12 5 PIN (IO-Link: M12 4 PIN)
Life duration light	Up to 50,000 hrs
Life duration buzzer	Up to 5,000 hrs

### MC55 High

Colour options	Red, yellow, green, white, blue, violet, turquoise (Multicolour) Red, yellow, green (Tricolour)
Light effects	Permanent light
Tone types and frequency	Pulse tone, 3400 Hz
	Voltage Current consumption M12
Tricolour (RGY)	24 V DC 60 mA <b>240 600 04</b>
Multicolour (RGB)	10-30 V DC max. 135 mA <b>240 600 02</b>



### MC55 High Smart

Colour options	Multicolour LED, configurable colours > 1 million colours
Light effects	Permanent, blinking, flashing and pulse light
Tone types and frequency	10 tones (Permanent, Pulse, Sweep, Alternating)
Output current	max. 200 mA
Output	Pulse Feedback, commutation 24 V
Voltage	24 V DC
Current consumption	max. 135 mA
Order no.	<b>240 620 01</b>

### MC55 High IO-Link

Colour options	Multicolour LED, configurable colours > 1 million colours
Light effects	Permanent, blinking, flashing and pulse light
Tone types and frequency	10 tones (Permanent, Pulse, Sweep, Alternating)
Voltage	18-30 V DC
Current consumption	60 mA
Order no.	<b>240 610 01</b>

### ↔ TECHNICAL DIAGRAM

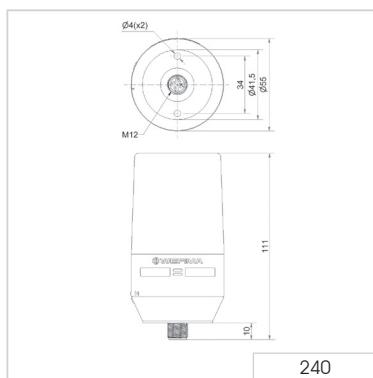

# 240 LED Installation Beacon Multicolour MC55 High



## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS

Dimensions (Ø x Height)	55 mm x 77 mm (in eingebautem Zustand)
Housing	PC black
Lens	PC, transparent
Fixing	Installation mounting M30
Connection	M12 5 PIN (IO-Link: M12 4 PIN)
Life duration light	Up to 50,000 hrs
Life duration buzzer	Up to 5,000 hrs

## MC55 High

Colour options	Red, yellow, green, white, blue, violet, turquoise (Multicolour) Red, yellow, green (Tricolour)
Light effects	Permanent light
Tone types and frequency	Pulse tone, 3400 Hz
	Voltage Current consumption M12
Tricolour (RGY)	24 V DC 60 mA <b>240 600 12</b>
Multicolour (RGB)	10-30 V DC max. 135 mA <b>240 600 10</b>


## MC55 High Smart

Mögliche Farben:	Multicolour LED, configurable colours > 1 million colours
Light effects	Permanent, blinking, flashing and pulse light
Tone types and frequency	10 tones (Permanent, Pulse, Sweep, Alternating)
Output current	max. 200 mA
Output	Pulse Feedback, commutation 24 V
Voltage	24 V DC
Current consumption	max. 135 mA
Order no.	<b>240 620 03</b>

## MC55 High IO-Link

Colour options	Multicolour LED, configurable colours > 1 million colours
Light effects	Permanent, blinking, flashing and pulse light
Tone types and frequency	10 tones (Permanent, Pulse, Sweep, Alternating)
Voltage	18-30 V DC
Current consumption	60 mA
Order no.	<b>240 610 03</b>

## ↔ TECHNICAL DIAGRAM

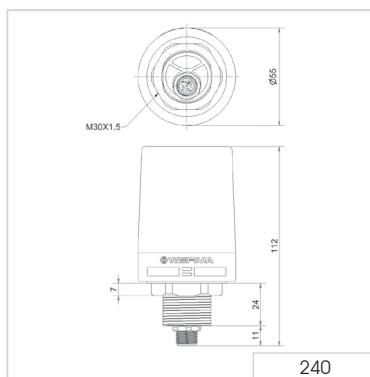

# EvoSIGNAL - Combinations

## Your benefits

The type of optical signals used depends on the application and environment. With EvoSIGNAL, finding the right signal device has never been so easy: Almost all areas of application are optimally covered by only two sizes (combinations) with specific mounting adapters. The new modular, simple and clear standard solution. EvoSIGNAL is one of a kind.

- Simple and easy to use: Number of different articles reduced to 20% whilst retaining a full range
- Twin functions: TwinLIGHT and TwinFLASH unite two light pattern functions in one element. They can be remote-controlled via connection terminals and also used as escalation levels
- Poka Yoke: Simple and intuitive installation - incorrect installation is impossible
- Mini and Midi also available as TriCOLOUR variants
- Maxi TwinFLASH can be used as an attention-grabbing alternative to xenon strobes and rotating mirror beacons

## Typical applications

Signal faults and statuses on machines and equipment, in building services engineering and in door and gate applications. All products are ideal for demanding indoor and outdoor applications.

- Mini – in installation sites with limited space
- Midi – signalling over medium distances (10–30 m)

## Installation options

- Base mounting
- M22/PG 29 single-hole mounting
- Tube mounting
- Bracket mounting

## Features


- Push-in connection terminals: Simple and permanently secure connection
- Fully compatible: Easy replacement of previous products
- Best-in-class equipment: Powerful, extremely robust (IP66), tamper-proof



Mini

Midi

## EvoSIGNAL Mini - Combinations

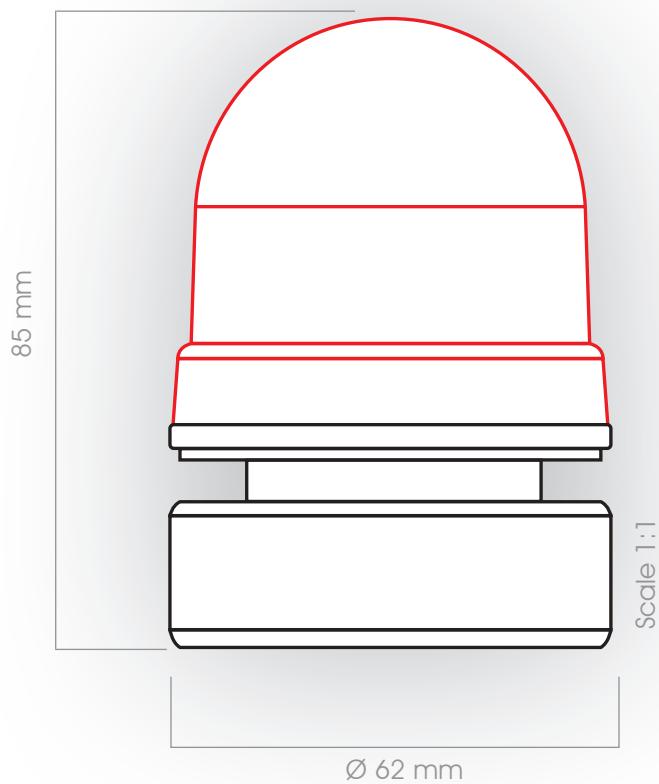

30  
TwinLIGHT, TwinFLASH



6  
Mounting adapter



# Quick-Finder EvoS/GNAL Mini - Combinations



12 V AC/DC	
TwinLIGHT	TwinFLASH
Order No.	Order No.
460 110 74	460 120 74
460 210 74	460 220 74
460 310 74	460 320 74
460 410 74	460 420 74
460 510 74	460 520 74

24 V AC/DC	
TwinLIGHT	TwinFLASH
Order No.	Order No.
460 110 75	460 120 75
460 210 75	460 220 75
460 310 75	460 320 75
460 410 75	460 420 75
460 510 75	460 520 75

115-230 V AC	
TwinLIGHT	TwinFLASH
Order No.	Order No.
460 110 60	460 120 60
460 210 60	460 220 60
460 310 60	460 320 60
460 410 60	460 420 60
460 510 60	460 520 60

## + Mounting adapter (compulsory!)

Base mounting



Order no.  
260 700 01

Installation mounting M22



Order no.  
260 700 03

Installation mounting PG 29



Order no.  
260 700 04

Tube mounting



Order no.  
260 700 05

Bracket mounting with cable gland









Order no.  
260 700 06

Bracket mounting



Order no.  
260 700 07



# EvoSIGNAL Mini - Combinations



Installation mounting M 22



Tube mounting



Installation mounting PG 29

## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height):	62 x 85 mm		
Housing:	PC/ABS		
Lens:	PC, transparent		
Connection:	Push-In terminal max. 1.5 mm <sup>2</sup>		
Cable entry:	Cable diameter 8-12 mm		
Tone type:	Continuous or Pulse tone		
Fixing:	Base/Tube/Wall/ Installation mounting		
Flashing/Blinking frequency:	1Hz		

### TwinLIGHT

Voltage:	12 V AC/DC	24 V AC/DC	115-230 V AC
Current consumption:	≤ 120 mA	≤ 115 mA	≤ 75 mA
red	<b>460 110 74</b>	<b>460 110 75</b>	<b>460 110 60</b>
green	<b>460 210 74</b>	<b>460 210 75</b>	<b>460 210 60</b>
yellow	<b>460 310 74</b>	<b>460 310 75</b>	<b>460 310 60</b>
white	<b>460 410 74</b>	<b>460 410 75</b>	<b>460 410 60</b>
blue	<b>460 510 74</b>	<b>460 510 75</b>	<b>460 510 60</b>


### TwinFLASH

Voltage:	12 V AC/DC	24 V AC/DC	115-230 V AC
Current consumption:	≤ 100 mA	≤ 115 mA	≤ 75 mA
red	<b>460 120 74</b>	<b>460 120 75</b>	<b>460 120 60</b>
green	<b>460 220 74</b>	<b>460 220 75</b>	<b>460 220 60</b>
yellow	<b>460 320 74</b>	<b>460 320 75</b>	<b>460 320 60</b>
white	<b>460 420 74</b>	<b>460 420 75</b>	<b>460 420 60</b>
blue	<b>460 520 74</b>	<b>460 520 75</b>	<b>460 520 60</b>

## ❖ ACCESSORIES:



Base mounting	<b>260 700 01</b>
Installation mounting M22	<b>260 700 03</b>
Installation mounting PG 29	<b>260 700 04</b>
Tube mounting	<b>260 700 05</b>
Bracket mounting with cable gland	<b>260 700 06</b>
Bracket mounting	<b>260 700 07</b>

## ↔ TECHNICAL DIAGRAM:

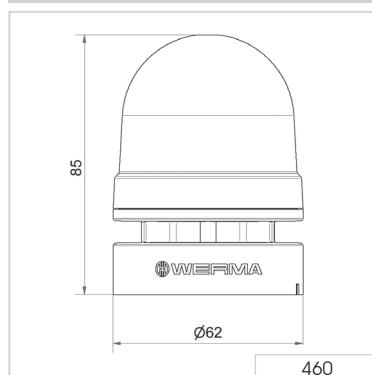

## EvoSIGNAL Midi - Combinations

Optical-audible combinations

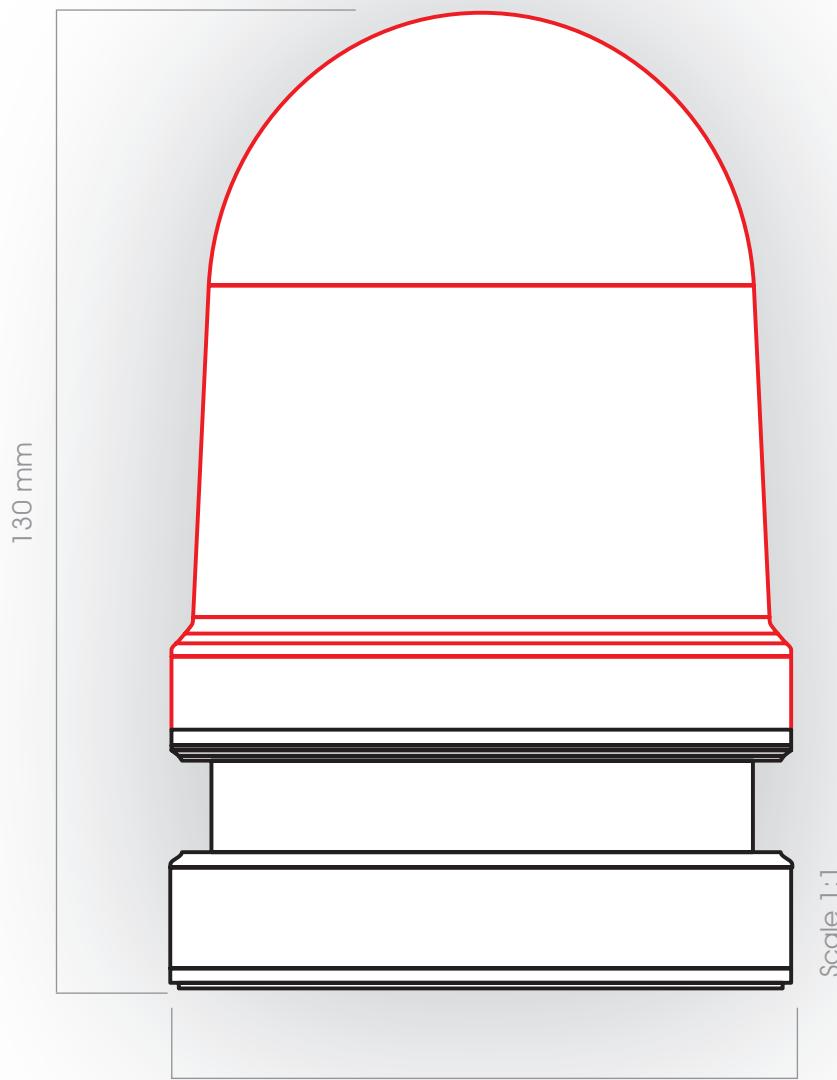

20  
TwinLIGHT, TwinFLASH



6  
Mounting adapter

# Quick-Finder EvoS/GNAL Midi - Combinations




12/24 V AC/DC	
TwinLIGHT	TwinFLASH
Order No.	Order No.
461 110 70	461 120 70
461 210 70	461 220 70
461 310 70	461 320 70
461 410 70	461 420 70
461 510 70	461 520 70



115-230 V AC	
TwinLIGHT	TwinFLASH
Order No.	Order No.
461 110 60	461 120 60
461 210 60	461 220 60
461 310 60	461 320 60
461 410 60	461 420 60
461 510 60	461 520 60

## + Mounting adapter (compulsory!)

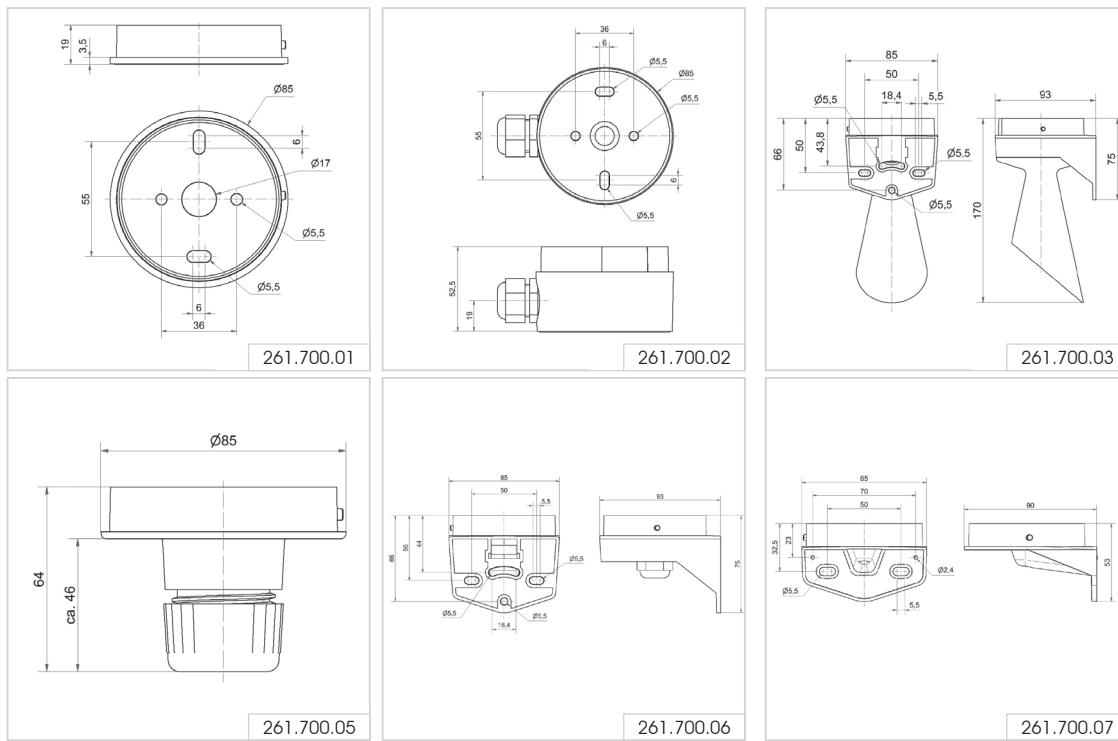

# EvoS/GNAL Midi - Combinations



Horn



Bracket mounting with cable gland



Tube mounting

## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height):	85 mm x 130 mm	
Housing:	PC/ABS	
Lens:	PC, transparent	
Fixing:	Base/Tube/Wall mounting	
Cable entry:	Cable diameter 8-12 mm	
Connection:	Push-In terminal max. 1.5 mm <sup>2</sup>	
Tone type:	Multi-tone, 10 tones	
Flashing/Blinking frequency:	1Hz	

### TwinLIGHT

Voltage:	12/24 V AC/DC	115-230 V AC
Current consumption:	≤ 345 mA	≤ 170 mA
red	<b>461 110 70</b>	<b>461 110 60</b>
green	<b>461 210 70</b>	<b>461 210 60</b>
yellow	<b>461 310 70</b>	<b>461 310 60</b>
white	<b>461 410 70</b>	<b>461 410 60</b>
blue	<b>461 510 70</b>	<b>461 510 60</b>


### TwinFLASH

Voltage:	12/24 V AC/DC	115-230 V AC
Current consumption:	≤ 110 mA	≤ 215 mA
red	<b>461 120 70</b>	<b>461 120 60</b>
green	<b>461 220 70</b>	<b>461 220 60</b>
yellow	<b>461 320 70</b>	<b>461 320 60</b>
white	<b>461 420 70</b>	<b>461 420 60</b>
blue	<b>461 520 70</b>	<b>461 520 60</b>

## ❖ ACCESSORIES:

Base mounting	<b>261 700 01</b>
Base mounting with cable gland	<b>261 700 02</b>
Tube mounting	<b>261 700 05</b>
Bracket mounting with cable gland	<b>261 700 06</b>
Bracket mounting	<b>261 700 07</b>
Horn	<b>261 700 03</b>

## ↔ TECHNICAL DIAGRAM:

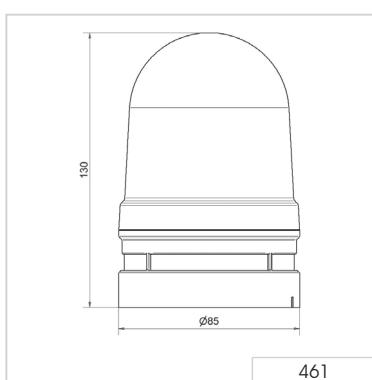

# Combination LED Beacon with Multi-Tone Sounder/Horn

## Your benefits

The WERMA LED Beacon with a siren or horn provides safety and security by delivering reliable fault alarms over medium distances. The IP65 protection rating is suitable for outdoor applications.

- Multiple light configurations for different purposes and distances (some with partial external triggering)
- Simple installation
- Tamper-proof when installed
- Multiple visual and audible escalation levels possible
- Clear all-round visibility thanks to the OmniVIEW lens; no blind spots
- Multi-tone siren with up to 32 tones available for maximum flexibility

## Typical applications

Fault signalling

- In areas with high ambient noise levels
- On machinery and equipment
- In building service systems (e.g. gas alarm)
- In the event of e.g. overload on mobile cranes and similar

## Installation options

- Base mounting
- Wall mounting
- Tube mounting

## Features

- Long life and energy-saving LEDs



# 430/432 LED Permanent Light/Multi-Tone Sounder Combination



LED Permanent Light in combination with Multi-Tone Sounder



Quick and simple wall mounting without additional accessories thanks to integrated mounting bracket (432)



Mounting holes integrated into the product rim allow easy mounting without having to remove the lens (430)



## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

	Base mounting (430)	Wall mounting (432)
Dimensions (Ø x Height):	146 mm x 171 mm	134 mm x 235 mm
Housing:	PC/ABS-Blend, black	PC/ABS-Blend, grey
Lens:	PC, transparent	
Connection:	Screw terminal 0.5-1.5 mm <sup>2</sup>	
Cable entry:	Cable diameter max. 13 mm	
Tone type and frequency:	32 tones adjustable, see table on page 220	
Life duration:	Up to 50,000 hrs (LED), up to 5,000 hrs (Multi-tone Sounder)	
Installation position:	Sound outlet facing downwards	
Fixing:	Base mounting (430), Wall mounting (432) Tube mounting (accessory, only for 430)	
Voltage:	24 V AC/DC	115-230 V AC*
Current consumption MTS:	190 mA	55 mA
Current consumption LED:	350 mA 230 mA (red)	100 mA 80 mA (red)
Base mounting		
red	<b>430 100 75</b>	<b>430 100 60</b>
yellow	<b>430 300 75</b>	<b>430 300 60</b>
Wall mounting		
red	<b>432 100 75</b>	<b>432 100 60</b>
yellow	<b>432 300 75</b>	<b>432 300 60</b>



\*Current consumption at 115 V

## ❖ ACCESSORIES:

Adaptor for tube mounting, plastic, for tube Ø 25 mm

**975 430 01**

## ↔ TECHNICAL DIAGRAMS:

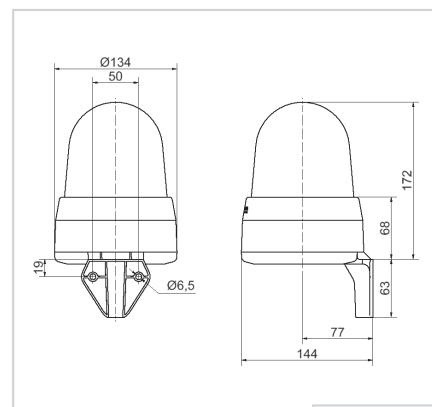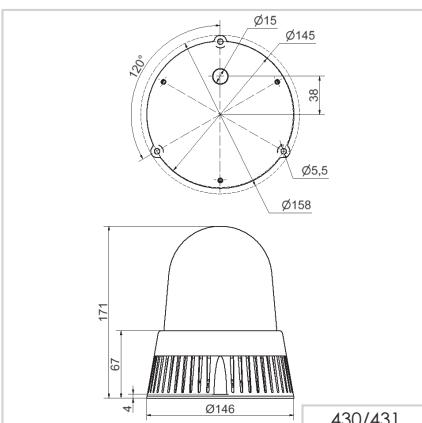

# 431/433 LED Permanent/Flashing/EVS/Multi-Tone Sounder Combination



Multi-functional LED beacon:  
3 light effects can be externally triggered



The adaptor enables mounting on a tube (431)

## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

	Base mounting (431)	Wall mounting (433)
Dimensions (Ø x Height):	146 mm x 171 mm	134 mm x 235 mm
Housing:	PCABS-Blend, black	PC/ABS-Blend, grey
Lens:	PC, transparent	
Connection:	Screw terminal 0.5-1.5 mm <sup>2</sup>	
Cable entry:	Cable diameter max. 13 mm	
Tone type and frequency:	32 tones adjustable, see table on page 220	
Installation position:	Sound outlet facing downwards	
Life duration:	Up to 50,000 hrs (LED), up to 5,000 hrs (Multi-tone Sounder)	
Fixing:	Base mounting (431), Wall mounting (433) Tube mounting (accessory, only for 431)	
Voltage:	24 V AC/DC	115-230 V AC*
Current consumption MTS:	190 mA	55 mA
Current consumption LED:	350 mA 230 mA (red)	100 mA 80 mA (red)
<b>Base mounting</b>		
red	<b>431 100 75</b>	<b>431 100 60</b>
yellow	<b>431 300 75</b>	<b>431 300 60</b>
<b>Wall mounting</b>		
red	<b>433 100 75</b>	<b>433 100 60</b>
yellow	<b>433 300 75</b>	<b>433 300 60</b>


\*Current consumption at 115 V

## ❖ ACCESSORIES:

Adaptor for tube mounting, plastic, for tube Ø 25 mm

**975 430 01**

## ↔ TECHNICAL DIAGRAMS:

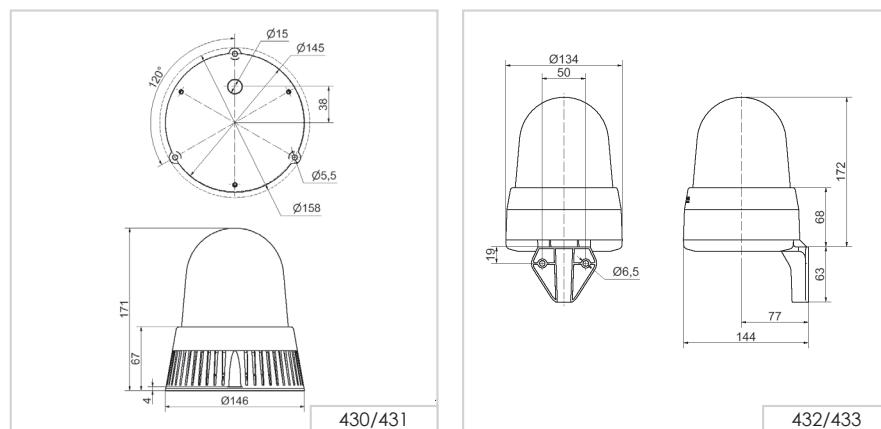

## 43 x Tone table for Multi-Tone Sounder

The Multi-Tone Sounder Combinations 43x offer a large choice of internationally recognised signal tones for the widest range of applications. The tone types and frequencies can be found in the table below:

♪ TONE TYPES AND FREQUENCIES:						
Tone 1	Tone type	Frequency (Hz)	Description	Use	Tone 2	Sound output (dBa)
1	continuous	200		BS 5839-1:2002	440 Hz cont.	97
2	rising	800 & 970	7 Hz		14	102
3	rising	800 & 970	1 Hz		14	103
4	continuous	2850			14	104
5	rising	2400 - 2850	7 Hz		4	109
6	rising	2400 - 2850	1 Hz		4	110
7	rising	500 - 1200	3 s, then 0.5 s OFF (then repeat)		14	106
8	falling	1200 - 500	1 Hz	DIN 33404-3	14	104
9	alternating	2400 & 2850	2 Hz		4	111
10	pulse	970	0.5 Hz (1 s On/1 s Off)	BS 5839 Part 1 1988	14	101
11	alternating	800 & 970	1 Hz	BS 5839 Part 1 1988	14	105
12	pulse	2850	0.5 Hz		4	104
13	pulse	970		0,25 s On/1 s Off	14	98
14	continuous	970		BS 5839-1:2002 PFEER - Toxic gas	10	102
15	alternating	554 & 440		France NFS	14	101
16	pulse	660	150 ms On/150 ms Off	Swedish	16	96
17	pulse	660	1.8 s On/1.8 s Off	Swedish	17	98
18	pulse	660	6.5 s On/13 s Off	Swedish	18	98
19	continuous	660		Swedish	19	98
20	alternating	554 & 440	0.5 Hz		20	102
21	pulse	660	1 Hz	Swedish	21	97
22	pulse	2850	150 ms On/100 ms Off	GB	14	104
23	rising	800 - 970	50 Hz (low)	BS 5839 Part 1 1988	14	102
24	rising	2400 - 2850	50 Hz (high)		4	109
25	pulse	970	3 x 500 ms ON/500 ms OFF / 1.5 s silence, then repeat (low)	ISO 8201 US Temporal	26	101
26	pulse	2850	3 x 500 ms ON/500 ms OFF / 1.5 s silence, then repeat (high)	ISO 8201 US Temporal	25	104
27	continuous	4000			27	92
28	rising	2000 - 2850	7 Hz		2000 Hz cont.	111
29	alternating	988 & 645	2 Hz		988 Hz cont.	102
30	alternating	510 & 610	2 Hz		510 Hz cont.	102
31	alternating	800 & 970	2 Hz	5839-1:2002	800 Hz cont.	105
32	alternating	800 & 1200	1 Hz		800 Hz cont.	105



# 434 LED Permanent Light / Horn Combination



Award winning design Winner of the iF product design award 2012




Quick and simple wall mounting without additional accessories thanks to integrated mounting bracket

## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (L x H x W):	134 mm x 407 mm x 144 mm	
Housing:	PC/ABS-Blend, grey	
Lens:	PC, transparent	
Connection:	Screw terminal 0.5-1.5 mm <sup>2</sup>	
Cable entry:	Cable diameter max. 13 mm	
Tone frequency:	c. 110 Hz	
Life duration:	Up to 50,000 hrs (LED), up to 5,000 hrs (Horn)	
Fixing:	Wall mounting, integrated mounting bracket	
Installation position:	Sound outlet facing downwards	
Voltage:	24 V AC/DC	115-230 V AC*
Current consumption MTS:	55 mA	30 mA
Current consumption LED:	350 mA 230 mA (red)	100 mA 80 mA (red)
red	<b>434 100 75</b>	<b>434 100 60</b>
yellow	<b>434 300 75</b>	<b>434 300 60</b>

\*Current consumption at 115 V

## ↔ TECHNICAL DIAGRAMS:

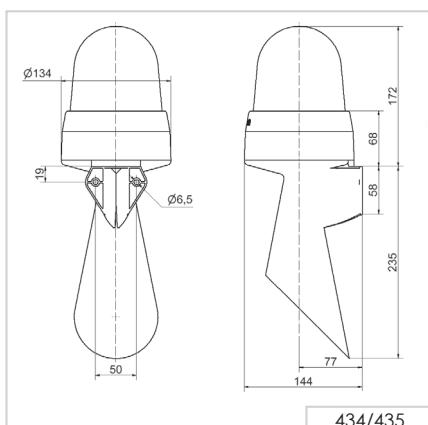

# 435 LED Permanent/Flashing/EVS/Horn Combination



Multi-functional LED beacon:  
3 light effects can be triggered externally



The "EVS" light effect ensures a maximum attention-grabbing effect

Optical-audible combinations




## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (L x H x W):	134 mm x 407 mm x 144 mm	
Housing:	PC/ABS-Blend, grey	
Lens:	PC, transparent	
Connection:	Screw terminal 0.5-1.5 mm <sup>2</sup>	
Cable entry:	Cable diameter max. 13 mm	
Tone frequency:	c. 110 Hz	
Life duration:	Up to 50,000 hrs (LED), up to 5,000 hrs (Horn)	
Fixing:	Wall mounting, integrated mounting bracket	
Installation position:	Sound outlet facing downwards	
Voltage:	24 V AC/DC	115-230 V AC*
Current consumption MTS:	55 mA	30 mA
Current consumption LED:	350 mA 220 mA (red)	100 mA 80 mA (red)
red	<b>435 100 75</b>	<b>435 100 60</b>
yellow	<b>435 300 75</b>	<b>435 300 60</b>

\*Current consumption at 115 V

## ↔ TECHNICAL DIAGRAMS:

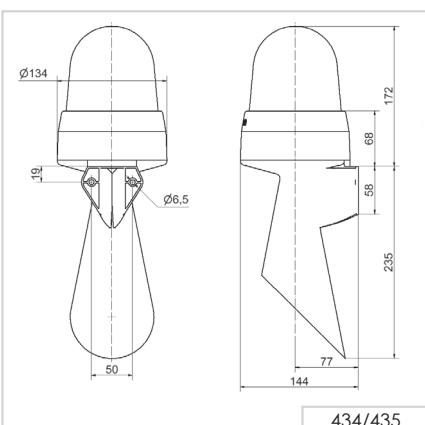

# Design Combination LED Multi-Tone Sirens

## Your benefits

The Design Combination LED Multi-Tone Sirens provide safety and security in environments with heightened aesthetic design requirements. The innovative housing design makes for simple mounting in many diverse applications.

- Ideal signalling effect over great distances
- Multiple visual and audible escalation levels possible
- Many application options with up to 32 tones available
- Up to 3 tones controlled remotely for the escalation of signals
- Includes standardised tones (including those used in fire alarms)

## Typical applications

Fault signalling

- In building service systems
- On machinery and equipment

## Installation options

- Wall mounting
- Base mounting
- Ceiling mounting

## Features

- Multi-voltage versions allow multiple applications with a single device
- Long life and energy-saving LEDs, either as a flashing light or EVS



Size comparison Design / Heavy Duty



# 444 LED Double Flash/Multi-Tone Sounder Combination



Base mounting



Wall mounting

Optical-audible combinations



## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (L x H x W):	109 mm x 112 mm x 150 mm		
Housing:	PC/ABS-Blend		
Lens:	PC, transparent		
Connection:	24 V: Screw terminal 0.5-1.5 mm <sup>2</sup> 115/230 V: CAGE CLAMP®		
Cable entry:	Membrane for cable diameter max. 13 mm		
Life duration:	Up to 50,000 hrs (LED Double Flash)		
Flash frequency:	c. 1 Hz		
Fixing:	Wall, base and ceiling mounting		
Voltage:	24 V AC/DC	115 V AC	230 V AC
Current consumption Optical:	60 mA	30 mA	30 mA
Current consumption Audible:	200 mA	55 mA	30 mA
red	<b>444 100 75</b>	<b>444 100 67</b>	<b>444 100 68</b>
yellow	<b>444 300 75</b>	<b>444 300 67</b>	<b>444 300 68</b>



## ❖ ACCESSORIES:

Cable gland M20 x 1.5 mm (for cable strain relief)	<b>975 444 01</b>
Protection rating IP 65 is guaranteed even without cable gland	

## ♪ TONE TYPES AND FREQUENCIES:

Selectable via DIP switch, see tone table on page 226, 3 tones can be externally triggered

## ↔ TECHNICAL DIAGRAMS:

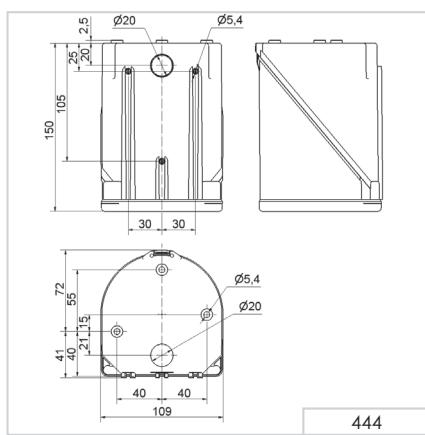

# 444 LED EVS / Multi-Tone Sounder Combination



Base mounting



The „EVS“ light effect ensures a maximum attention-grabbing effect

## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (L x H x W):	109 mm x 112 mm x 150 mm		
Housing:	PC/ABS-Blend		
Lens:	PC, transparent		
Connection:	24 V: Screw terminal 0.5-1.5 mm <sup>2</sup> 115/230 V: CAGE CLAMP®		
Cable entry:	Membrane for cable diameter max. 13 mm		
Fixing:	Wall, base and ceiling mounting		
Life duration:	Up to 50,000 hrs (LED EVS)		
Voltage:	24 V AC/DC	115 V AC	230 V AC
Current consumption Optical:	60 mA	30 mA	30 mA
Current consumption Audible:	220 mA	55 mA	30 mA
red	<b>444 110 75</b>	<b>444 110 67</b>	<b>444 110 68</b>
yellow	<b>444 310 75</b>	<b>444 310 67</b>	<b>444 310 68</b>



## ❖ ACCESSORIES:

Cable gland M20 x 1.5 mm (for cable strain relief)	<b>975 444 01</b>
Protection rating IP 65 is guaranteed even without cable gland	

## ♪ TONE TYPES AND FREQUENCIES:

Selectable via DIP switch, see tone table on page 226, 3 tones can be externally triggered

## ↔ TECHNICAL DIAGRAMS:

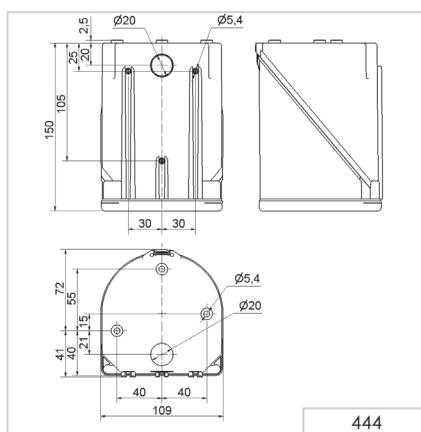

## 444 Combination



The 444 Combinations offer a large choice of internationally recognised signal tones for the widest spectrum of applications. 3 tones can be triggered externally.

TONE TYPES AND FREQUENCIES:						
Tone 1	Tone type	Frequency (Hz)	Description	Use	Tone 2	Sound output (dBa)
1	continuous	200		BS 5839-1:2002	440 Hz cont.	97
2	rising	800 & 970	7 Hz		14	102
3	rising	800 & 970	1 Hz		14	103
4	continuous	2850			14	104
5	rising	2400 - 2850	7 Hz		4	109
6	rising	2400 - 2850	1 Hz		4	110
7	rising	500 - 1200	3 s, then 0.5 s OFF (then repeat)		14	106
8	falling	1200 - 500	1 Hz	DIN 33404-3	14	104
9	alternating	2400 & 2850	2 Hz		4	111
10	pulse	970	0.5 Hz (1 s On/1 s Off)	BS 5839 Part 1 1988	14	101
11	alternating	800 & 970	1 Hz	BS 5839 Part 1 1988	14	105
12	pulse	2850	0.5 Hz		4	104
13	pulse	970		0,25 s On/1 s Off	14	98
14	continuous	970		BS 5839-1:2002 PFEER - Toxic gas	10	102
15	alternating	554 & 440		France NFS	14	101
16	pulse	660	150 ms On/150 ms Off	Swedish	16	96
17	pulse	660	1.8 s On/1.8 s Off	Swedish	17	98
18	pulse	660	6.5 s On/13 s Off	Swedish	18	98
19	continuous	660		Swedish	19	98
20	alternating	554 & 440	0.5 Hz		20	102
21	pulse	660	1 Hz	Swedish	21	97
22	pulse	2850	150 ms On/100 ms Off	GB	14	104
23	rising	800 - 970	50 Hz (low)	BS 5839 Part 1 1988	14	102
24	rising	2400 - 2850	50 Hz (high)		4	109
25	pulse	970	3 x 500 ms ON/500 ms OFF / 1.5 s silence, then repeat (low)	ISO 8201 US Temporal	26	101
26	pulse	2850	3 x 500 ms ON/500 ms OFF / 1.5 s silence, then repeat (high)	ISO 8201 US Temporal	25	104
27	continuous	4000			27	92
28	rising	2000 - 2850	7 Hz		2000 Hz cont.	111
29	alternating	988 & 645	2 Hz		988 Hz cont.	102
30	alternating	510 & 610	2 Hz		510 Hz cont.	102
31	alternating	800 & 970	2 Hz	5839-1:2002	800 cont.	105
32	alternating	800 & 1200	1 Hz		800 cont.	105

# Heavy Duty Combination – Multi-Tone Siren with Xenon Flash

## Your benefits

The WERMA Heavy Duty Combination - Multi-Tone Siren with Xenon Flash features a very robust housing. The combination device provides safety and security through reliable, loud signalling in particularly harsh environments. Up to 120 dB for use in extremely noisy environments and signalling over long distances.

- Multiple visual and audible escalation levels possible
- Includes standardised tones (including those used in fire alarms)
- Up to 42 tones for signalling various statuses

## Typical applications

Signalling of faults or alarms

- Outdoors in extreme conditions
- In larger industrial plants
- As an evacuation alarm

## Installation options

- Wall mounting

## Features

- High protection rating IP66
- Multi-voltage versions available



Size comparison Heavy Duty / Design



# 439 Xenon Flash/Multi-Tone Sounder Combination (105 dB)



## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (L x H x W):	136 mm x 138 mm x 119 mm	
Housing:	ABS	
Connection:	Screw terminal 0.28-2.5 mm <sup>2</sup>	
Cable entry:	Cable gland M20 x 1.5 mm (not included in assembly)	
Flash frequency:	1 Hz	
Flash energy	1.6 Ws	
Tone type and frequency:	Selectable via DIP switch, 2 tones can be externally triggered	
Voltage:	9-60 V DC	110-230 V AC
Current consumption:	230 mA (24 V)	30 mA (230 V)
Housing/Flash		
red / red	<b>439 010 55</b>	<b>439 010 68</b>
red / yellow	<b>439 030 55</b>	<b>439 030 68</b>
grey / red	<b>439 110 55</b>	<b>439 110 68</b>
grey / yellow	<b>439 130 55</b>	<b>439 130 68</b>

## ❖ ACCESSORIES:



Cable gland M20 x 1.5 mm (for cable strain relief)  
Protection rating IP 65 is guaranteed even without cable gland

**975 444 01**

## ♪ TONE TYPES AND FREQUENCIES:

For further details see [www.werma.com](http://www.werma.com).

## ↔ TECHNICAL DIAGRAMS:

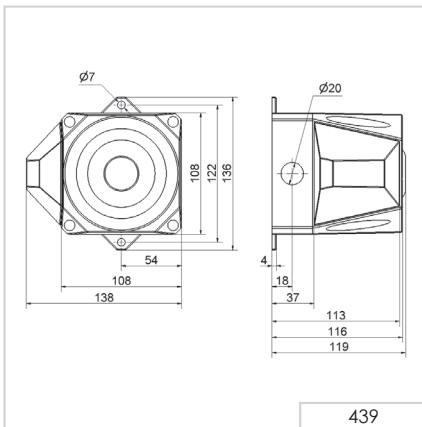

# 441 Xenon Flash/Multi-Tone Sounder Combination (110 dB)



## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (L x H x W):	165 mm x 169 mm x 132 mm	
Housing:	PC/ABS-Blend	
Connection:	Screw terminal 0.28-2.5 mm <sup>2</sup>	
Cable entry:	Cable gland M20 x 1.5 mm (not included in assembly)	
Flash frequency:	1 Hz	
Flash energy	2.5 Ws	
Tone type and frequency:	Selectable via DIP switch, 2 tones can be externally triggered	
Voltage:	9-60 V DC	230 V AC
Current consumption:	230 mA	35 mA
Housing/Flash		
red / red	<b>441 010 55</b>	<b>441 010 68</b>
red / yellow	<b>441 030 55</b>	<b>441 030 68</b>
grey / red	<b>441 110 55</b>	<b>441 110 68</b>
grey / yellow	<b>441 130 55</b>	<b>441 130 68</b>



## ❖ ACCESSORIES:

Cable gland M20 x 1.5 mm (for cable strain relief)	
Protection rating IP 65 is guaranteed even without cable gland	<b>975 444 01</b>

## ♪ TONE TYPES AND FREQUENCIES:

For further details see [www.werma.com](http://www.werma.com).

## ↔ TECHNICAL DIAGRAMS:

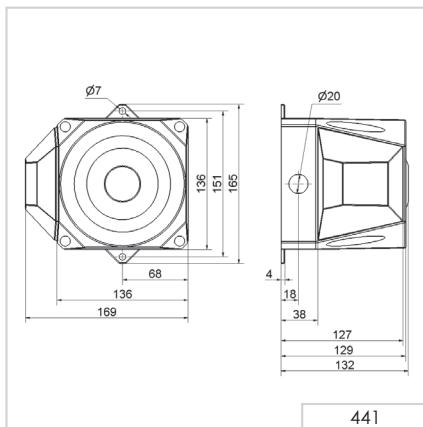

# 442 Xenon Flash / Multi-Tone Sounder Combination (120 dB)



## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:


Dimensions (L x H x W):	168 mm x 211 mm x 155 mm	
Housing:	PC/ABS-Blend	
Connection:	Screw terminal 0.28-2.5 mm <sup>2</sup>	
Cable entry:	Cable gland M20 x 1.5 mm (not included in assembly)	
Tone type and frequency:	Selectable via DIP switch, 3 tones externally triggered see table on page 231	
Voltage:	18-30 V DC	115/230 V AC
Current cons. Multi Tone Sounder:	450 mA	130/65 mA
Current consumption Flash:	127-389 mA (dependent on voltage and flash frequency)	- /15 mA (dependent on voltage and flash frequency)
Flash frequency	0.75 Hz/1 Hz	1.25 Hz/2 Hz
Flash energy	3.5 Ws	2 Ws
Housing/Flash		2 Ws
red / red	<b>442 010 55</b>	<b>442 010 68</b>
red / yellow	<b>442 030 55</b>	<b>442 030 68</b>
grey / red	<b>442 110 55</b>	<b>442 110 68</b>
grey / yellow	<b>442 130 55</b>	<b>442 130 68</b>

## ☒ ACCESSORIES:

Cable gland M20 x 1.5 mm (for cable strain relief)  
Protection rating IP 65 is guaranteed even without cable gland

**975 444 01**

## ↔ TECHNICAL DIAGRAMS:

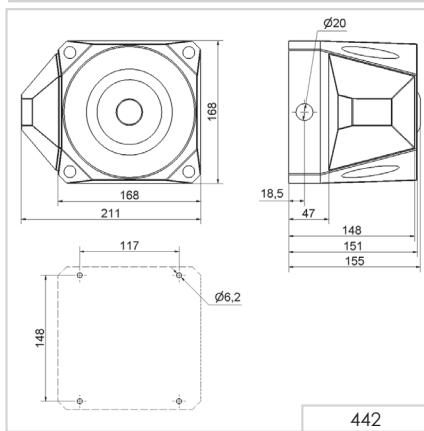

## 442 Combination

The Flash/Multi-Tone Sounder Combination 442 offers a large choice of internationally recognised signal tones for the widest spectrum of applications. 3 tones can be triggered externally. The first two tones can be freely chosen. The third tone is paired with the second tone.


### ♪ TONE TYPES AND FREQUENCIES:

Tone 1+2 No	Tone type	Use	Output (dbA)	Tone 3
1	alternating 800/970 Hz in 2 Hz stroke (250 ms-250 ms)		120	14
2	rising 800/970 Hz in 7 Hz stroke (7/s)		120	14
3	rising 800/970 Hz in 1 Hz stroke (1/s)		120	14
4	continuous 2,850 Hz		111	9
5	rising 2,400-2,850 Hz in 7 Hz stroke		109	4
6	rising 2,400-2,850 Hz in 1 Hz stroke		110	4
7	500-1,200 Hz rising in 3 sec., 0.5 sec. OFF	Slow Whoop Holland	119	14
8	falling 1,200-500 Hz in 1 Hz stroke	DIN/PFEER (PAPA), DIN 33404-3, VDS tested	119	14
9	alternating 2,400/2,850 Hz in 2 Hz stroke (250 ms-250 ms)		113	4
10	pulse 970 Hz in 0.5 Hz stroke (1 sec. ON / 1 sec. OFF)	PFEER Alarm	117	14
11	alternating 800/970 Hz in 1 Hz stroke (500 ms-500 ms)		118	14
12	pulse 2,850 Hz in 0.5 Hz stroke (1 sec. ON / 1 sec. OFF)		112	4
13	970 Hz pulse: 0.25 sec. ON / 1 sec. OFF		117	14
14	continuous 970 Hz	PFEER - Toxic gas	118	8
15	554 Hz/100 ms alternating 440 Hz/400 ms	French alarm signal AFNOR NFS 32S 32-001	115	14
16	660 Hz pulse: 150 ms ON, 150 ms. OFF	Swedish alarm signal	114	14
17	660 Hz pulse: 1.8 sec. ON, 1.8 sec. OFF	Swedish alarm signal	115	14
18	660 Hz pulse: 6.5 sec. ON, 13 sec. OFF	Swedish alarm signal	115	14
19	continuous 660 Hz	Swedish alarm signal	116	1
20	alternating 554/440 Hz in 0.5 Hz stroke (1 sec. ON / 1 sec. OFF)	Swedish alarm signal	115	19
21	pulse 660 Hz in 1 Hz stroke (500 ms-500 ms)	Swedish alarm signal	115	4
22	pulse 2,850 Hz in 4 Hz stroke (150 ms ON / 100 ms OFF)	Swedish alarm signal	110	4
23	rising 800-970 Hz in 50 Hz stroke	Swedish alarm signal	117	14
24	rising 2,400-2,850 Hz in 50 Hz stroke	Swedish alarm signal	110	4
25	970 Hz pulse.: 3 x 500 ms. ON, 500 ms OFF, break 1.5 sec.	ISO 8201 / US Temporal	118	14
26	2,850 Hz pulse.: 3 x 500 ms. ON, 500 ms OFF, break 1.5 sec.	ISO 8201 / US Temporal	112	4
27	continuous 4,000 Hz		105	6
28	alternating 800/970 Hz in 2 Hz stroke (250 ms-250 ms)		118	14
29	alternating 990/650 Hz in 2 Hz stroke (250 ms-250 ms)		117	14
30	alternating 510/610 Hz in 2 Hz stroke (250 ms-250 ms)		116	14
31	rising 300-1,200 Hz in 1 Hz stroke		118	14
32	continuous Bell		117	3
33	continuous Bell: 3x500 ms. Pulse, 1.5 sec. Silence, then repeat	Bell / US Temporal	117	14
34	alternating 1,000/2,000 Hz in 1 Hz stroke (500 ms-500 ms)	Singapore	115	4
35	pulse 420 Hz (0,625 sec.)	Australian alarm signal	118	14
36	500-1,200 Hz rising in 3.75 sec., then 0.25 sec. OFF	Australian alarm signal (Evacuation)	117	14
37	rising 1,400-1,600 Hz in 1 sec., falling in 0.5 sec.	NF C 48-265	116	14
38	500-1,200 Hz rising and falling in 3 sec.	Siren	117	14
39	pulse 720 Hz: 0.7 sec. ON, 0.3 sec. OFF	German industrial alarm	118	14
40	rising 422-775 Hz in 0.85 sec., 1 sec. silence, then repeat	NFPA Whoop	118	14
41	continuous 470 Hz	Horn (USA)	114	3
42	continuous 370 Hz	Air Horn (USA)	113	3



Integrated  
signalling



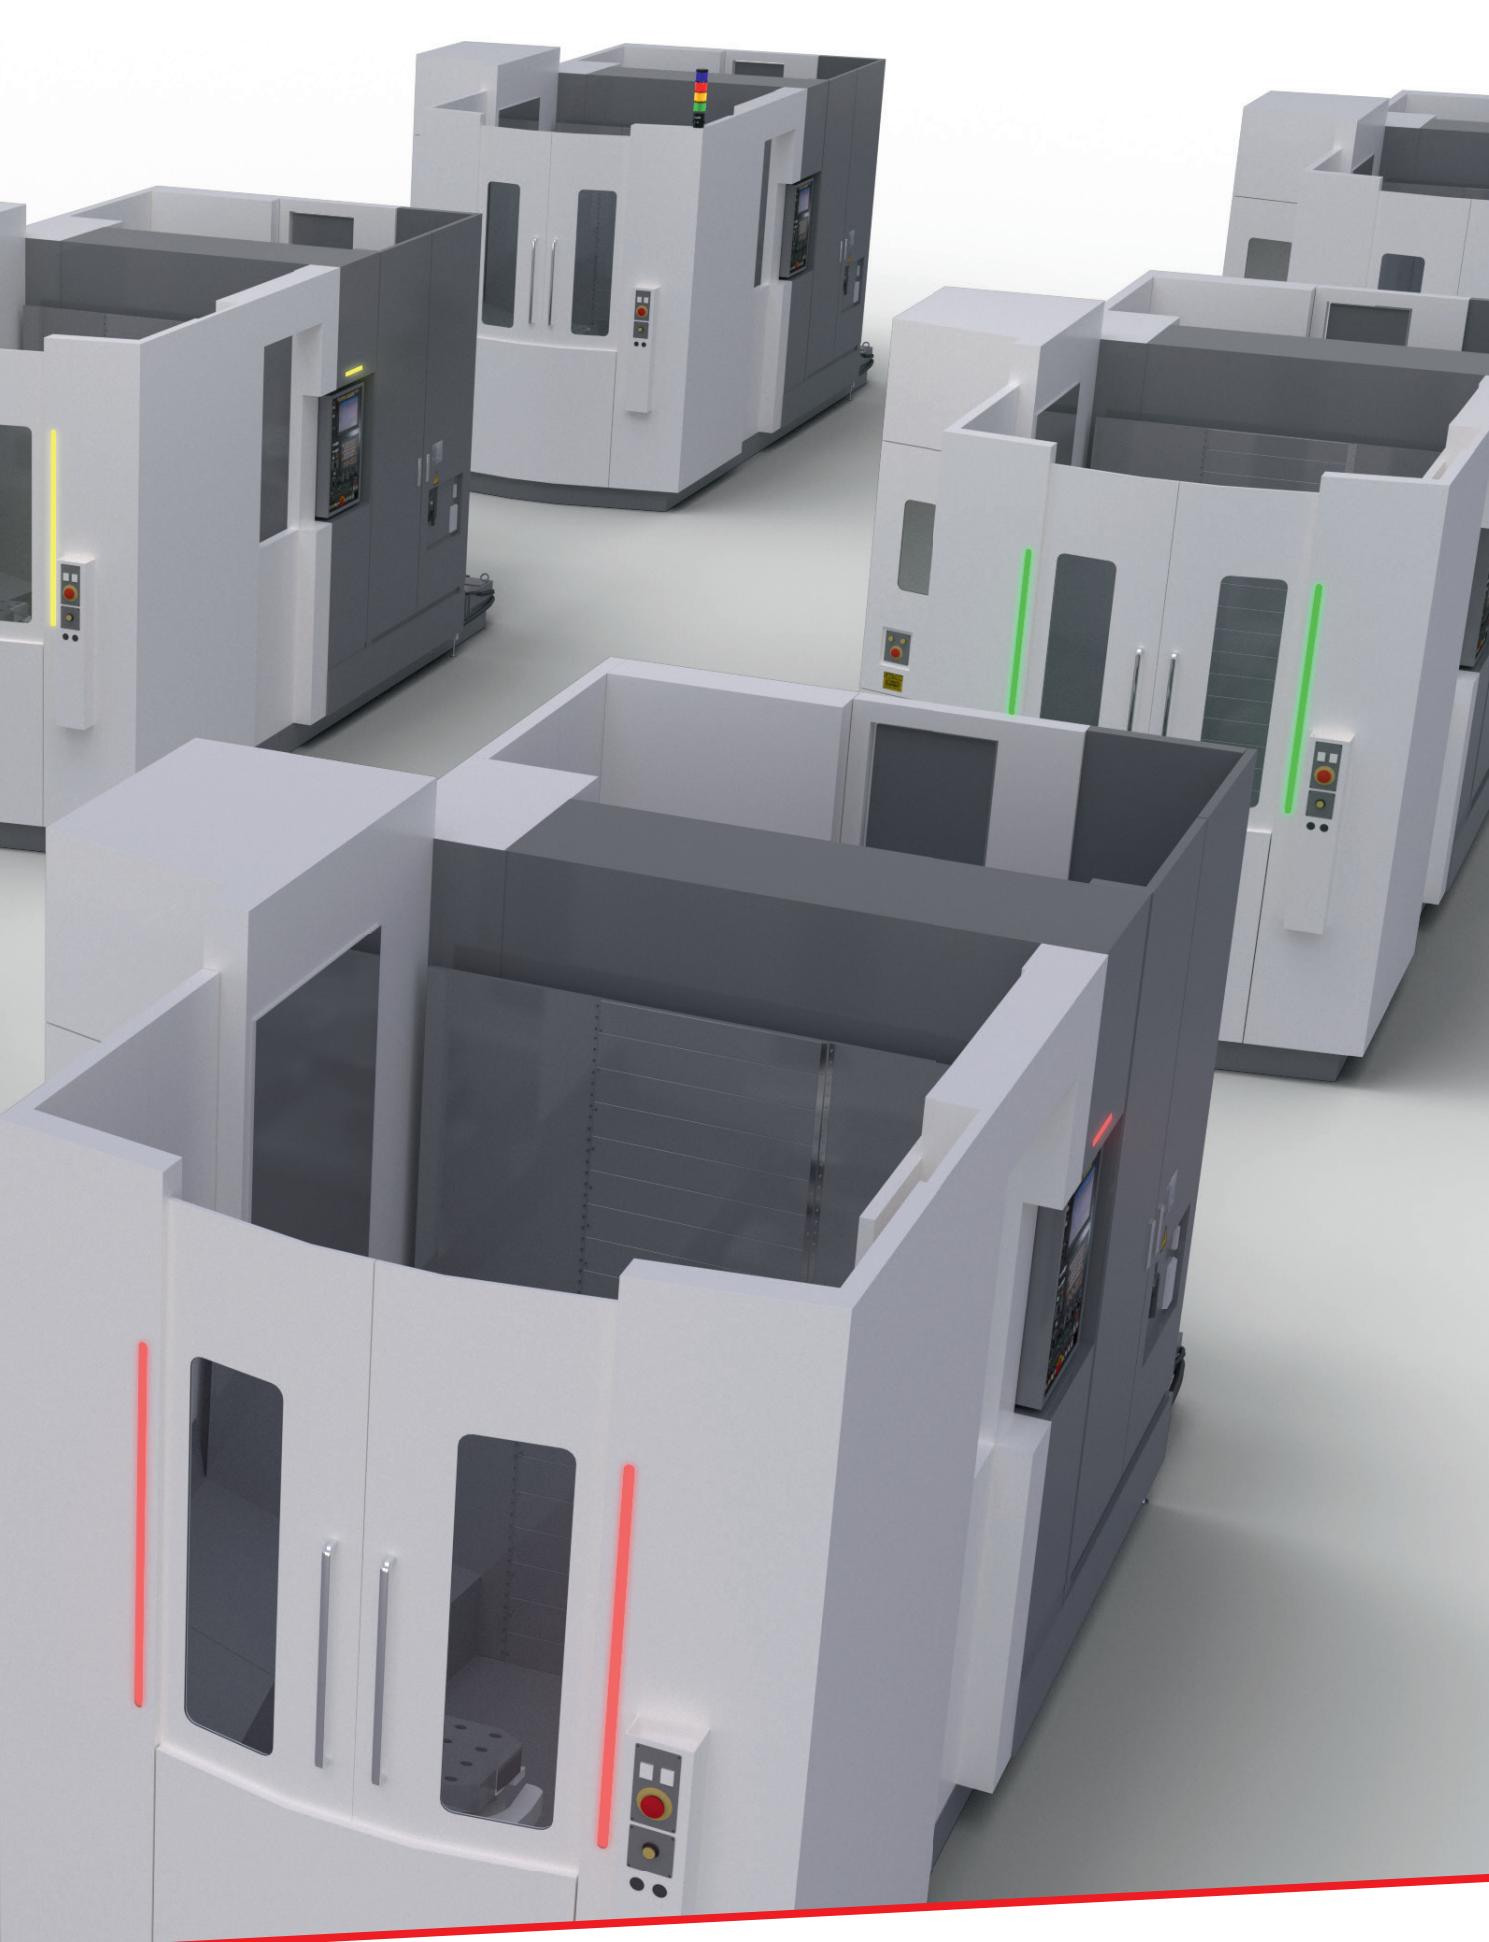

Integrated signalling

Integrated  
signalling

# LineLIGHT Fusion - integrated signalling

## Your benefits

With LineLIGHT Fusion, WERMA offers a fully integrable signalling solution that integrates seamlessly into the main product and impresses with standardised modules from the LineLIGHT Fusion series as a high-quality, functional design element. The display of machine statuses is integrated as a function in the machine design, which transfers all the benefits of signalling in terms of safety, efficiency and productivity into the design of the machine.

The fully integrated solution also supports the hygienic requirements of the production environment. The precise integration into the machine surface minimises dirty edges, avoids openings and offers a high level of protection against the ingress of dust and liquids.

The homogeneous, full-surface illumination of the LineLIGHT Fusion modules ensures

- optimum visibility
- Reliably signals hazards or critical machine states

Optional:

- Light modules with additional acoustic warning
- Can be configured in 50 mm increments between 100 mm and 1500 mm
- Different light contours and images

## Typical application

For machine and system manufacturers who want to implement a consistent machine design with an integrated signalling solution, for signalling machine statuses, on

- machines
- automation systems
- assembly systems
- Transport and conveyor belts
- All other industrial products that have a sheet metal housing

## Installation options

- Screw mounting using a clip
- Adhesive mounting using industrial adhesive tape



# LineLIGHT Fusion



## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS

	100 mm	200 mm	500 mm
Dimension (L x H x W)	145 x 33 x 23 mm	245 x 33 x 23 mm	545 x 33 x 23 mm
Housing	Aluminium, black		
Lens	PC, transparent		
Fixing	Installation mounting		
Connection	M12 5-pin		
Colour options	Red, yellow, green, white, blue, violet, turquoise (Multicolour)		
Tone type	Pulse tone		
Voltage	24 V DC		
<b>With acoustic</b>			
Clips	<b>300 100 02</b>	<b>300 100 06</b>	<b>300 100 10</b>
Tape	<b>300 100 04</b>	<b>300 100 08</b>	<b>300 100 12</b>
Current consumption	110 mA	165 mA	325 mA
<b>Without acoustic</b>			
Clips	<b>300 100 01</b>	<b>300 100 05</b>	<b>300 100 09</b>
Tape	<b>300 100 03</b>	<b>300 100 07</b>	<b>300 100 11</b>
Current consumption	100 mA	155 mA	315 mA


Individual sizes in 50 mm steps from 100 to 1500 mm possible on request.

## ↔ TECHNICAL DIAGRAM

LineLIGHT Fusion in the dimensions 100, 200 and 500 mm with or without acoustics. Further sizes available on request.



Mounting clips

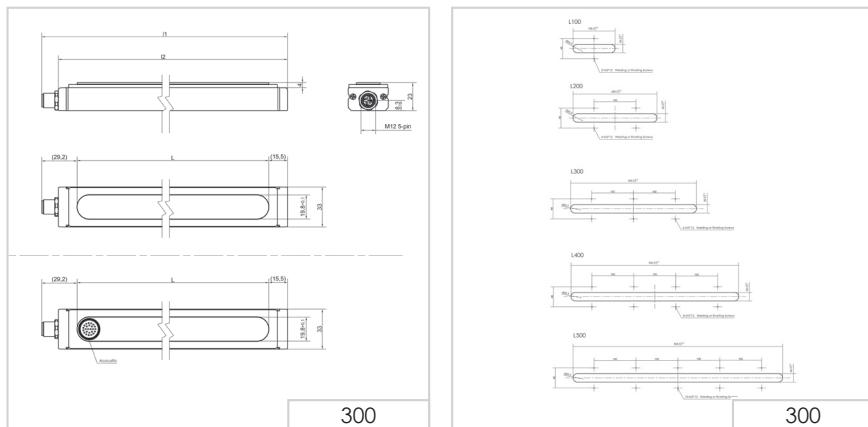

# LineLIGHT Fusion segments

## Your benefits

LineLIGHT Fusion is also available as a segment version. This allows the light pattern to be divided into several sections. With the 200 mm version, either the entire length can be illuminated in a single colour or it can be divided into two 100 mm segments with different colours. From a length of 300 mm, up to three segments are possible: continuous illumination over 300 mm, two segments of 150 mm each or three segments of 100 mm each, each of which can also be displayed in different colours.

The homogeneous, full-surface illumination of the LineLIGHT Fusion modules ensures

- optimum visibility
- Reliably signals hazards or critical machine states

Optional:

- Light modules with additional acoustic warning
- Different light contours and images

## Typical application

For machine and system manufacturers who want to implement a consistent machine design with an integrated signalling solution, for signalling machine statuses, on

- machines
- automation systems
- assembly systems
- Transport and conveyor belts
- All other industrial products that have a sheet metal housing

## Installation options

- Screw mounting using a clip



# LineLIGHT Fusion segments



## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS

	200 mm	300 mm	600 mm	900 mm
Dimension (L x H x W):	245 x 33 x 23 mm	345 x 33 x 23 mm	645 x 33 x 23 mm	945 x 33 x 23 mm
Housing:	Aluminium, black			
Lens:	PC, transparent			
Fixing:	Installation mounting			
Connection:	M12 5-pin			
Colour options:	Red, yellow, green, white, blue (Multicolour) Colour selection depends on variant			
Tone type:	Pulse tone			
Voltage:	24 V DC			
Number of segments	1-2	1-3	1-3	1-3
<b>With acoustic</b>				
<b>Clip</b>	<b>300 100 66</b>	<b>300 100 68</b>	<b>300 100 70</b>	<b>300 100 72</b>
Current consumption	170 mA	220 mA	380 mA	545 mA
<b>Without acoustic</b>				
<b>Clip</b>	<b>300 100 65</b>	<b>300 100 67</b>	<b>300 100 69</b>	<b>300 100 71</b>
Current consumption	160 mA	210 mA	375 mA	535 mA



Sizes 1200 and 1500 mm available on request.

## ↔ TECHNICAL DIAGRAM

LineLIGHT Fusion in sizes 200, 300 and 900 mm with and without acoustics.



Mounting clips

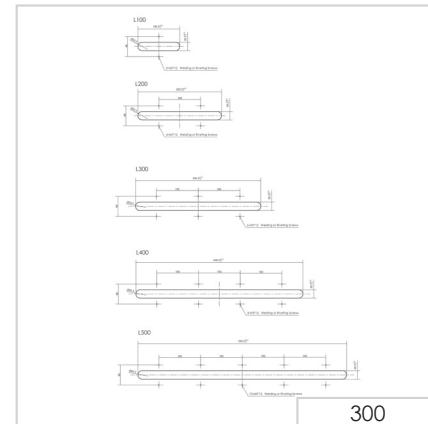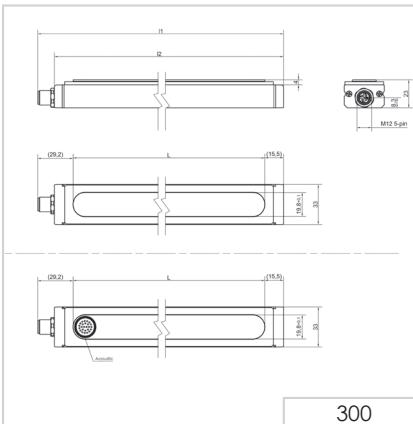

300



# Product number index



Product no.	Page
107	159
109	160
110	161
111	162
114	163
118	164
119	164
123	174
126	175
127	replaced by 160
128	replaced by 160
129	188
133	replaced by 161
134	replaced by 161
139	190
140	181
141	191
142	192
144	183
150	201
153	143
154	186
160	169
161	172
190	146
200	replaced by 260
201	replaced by 260
202	replaced by 260
203	replaced by 260
204	replaced by 260
205	replaced by 260
206	replaced by 260
207	replaced by 260
208	replaced by 260
209	replaced by 260
210	replaced by 260
211	replaced by 260
212	replaced by 260
213	replaced by 260
214	replaced by 260
215	replaced by 260
216	replaced by 260
219	replaced by 260
220	replaced by 260

Product no.	Page
221	replaced by 260
222	replaced by 260
223	replaced by 260
224	replaced by 260
225	replaced by 260
230	97
231	98
239	AS-Interface
240	without buzzer
240	with buzzer
241	without buzzer
241	with buzzer
260	109+115
261	118+130
262	121+130
280	replaced by 262
280	LED Obstruction Light
281	134
300	235+237
420	replaced by 460 + 461
421	replaced by 460 + 461
422	replaced by 460 + 461
423	replaced by 460 + 461
424	replaced by 460
425	replaced by 460
430	218
431	219
432	218
433	219
434	221
435	222
439	228
441	229
442	230
444	224
450	with acknowledgement
460	212
461	215
570	176
573	177
574	178
575	179
584	replaced by 161
585	replaced by 161

Product no.	Page
630	Terminal elements
631	IO Link KS 40
634	LED elements
635	Audible elements
639	28
640	Terminal elements KS 71
640	Terminal elements KS 72
641	41
643	41
644	LED elements
645	Audible elements KS 71
645	Audible elements KS 72
646	AS-Interface
647	LED elements
649	Pre-configured KS 71
649	Pre-configured KS 72
657	63
686	67
690	77
691	75
694	71
695	73
698	60
699	60
800	110
801	111
802	replaced by 260
806	124
816	USB multicolour
826	replaced by 261
827	replaced by 261
828	replaced by 261
829	replaced by 261
829	monitored
839	LED Permanent
839	LED Rotating
853	LED Permanent
853	LED Double flash
853	LED EVS
860	AndonLIGHT
860	AndonSMARTBOX
860	AndonCONTROL
860	AndonWIRELESS
861	KombiSIGN reflect EU
861	56

Product no.	Page
861 KombiSIGN reflect North America	57
883	127
884	129
885	128
890 LED	145
890	146
894	152
895	147
914	195
956	151





Systems for optimising  
production and logistics areas




# Intelligent signalling technology from WERMA – Industry 4.0 simply realised

In addition to classic signalling devices, WERMA offers intelligent solutions that make Industry 4.0 tangible, experiential and immediately implementable. Our systems are ready-to-use plug-and-play solutions that work out-of-the-box – simply install and get started. Because at WERMA, signalling technology is taken to the next level!

With our call and signalling systems (AndonLIGHT, KombiSIGN Reflect and AndonWIRELESS), you can quickly and easily report faults at manual workstations or implement access controls on doors and gates – professionally and efficiently – without additional software.

Our WeASSIST platform enables the collection, visualisation and evaluation of all process data in real time. This gives you full transparency over your production, increases efficiency and secures your long-term competitiveness – whether in manual, shipping or automated production areas.

More information at [werma.com](http://werma.com)

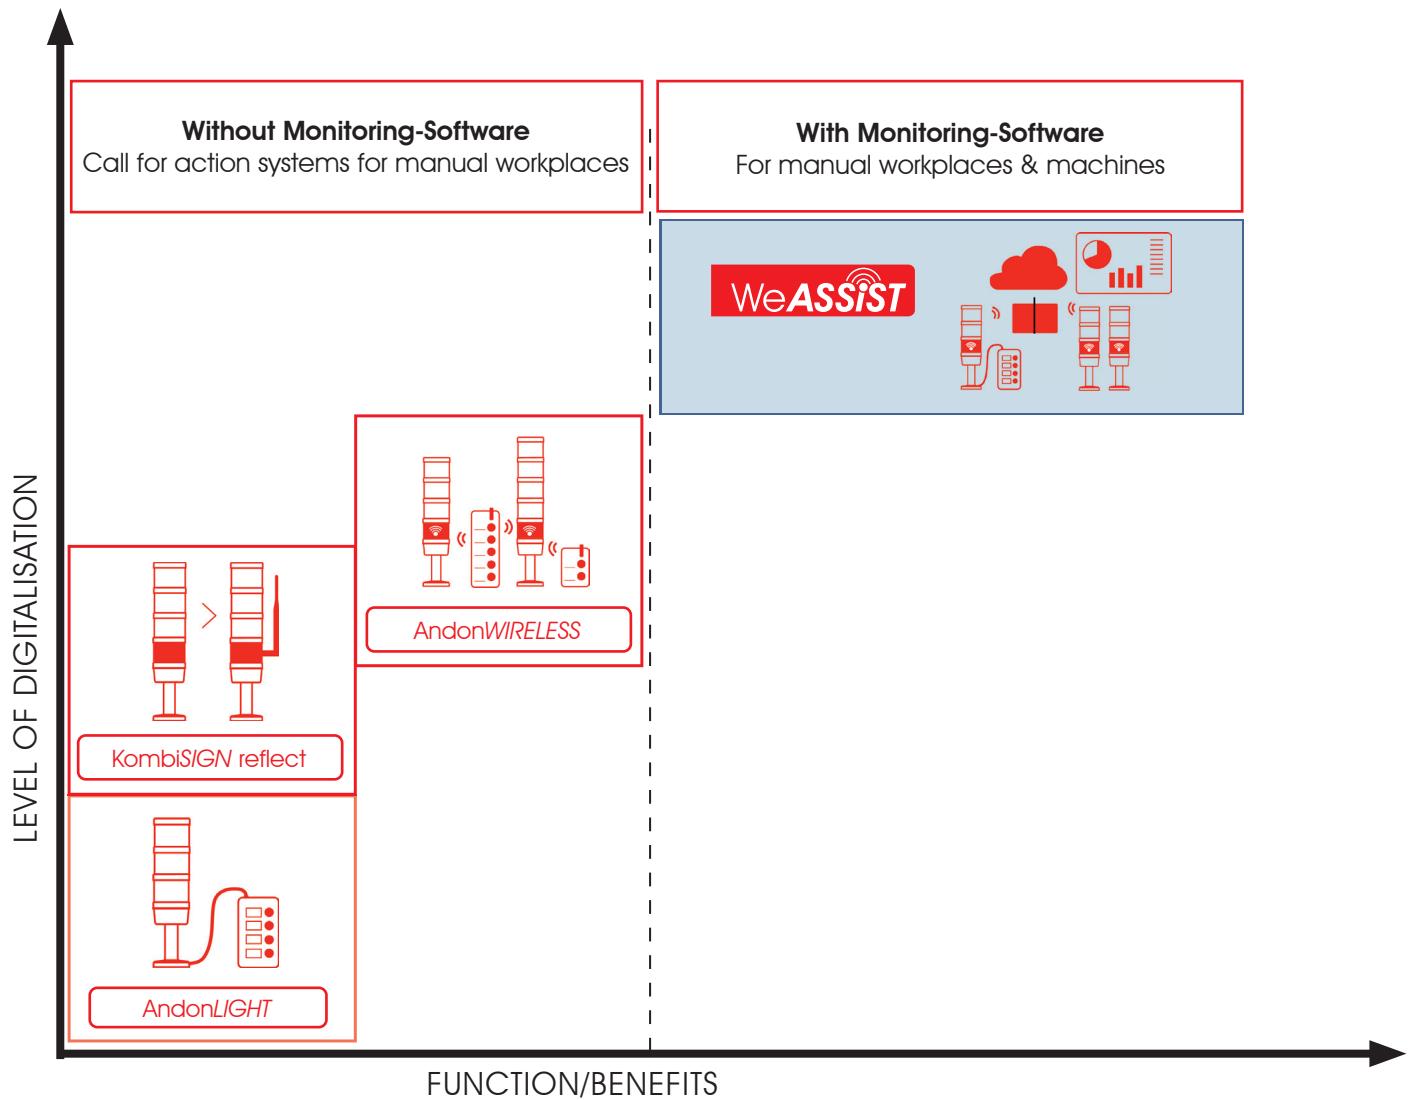

**WERMA Signaltechnik GmbH + Co. KG**

Dürbheimer Str. 15  
D-78604 Rietheim-Weilheim  
Phone +49 7424 9557-0  
Fax +49 7424 9557-44  
[www.werma.com](http://www.werma.com)  
[info@werma.com](mailto:info@werma.com)

**WERMA Signaltechnik**

Niederlassung Neuhausen am Rrh.  
Rheingoldstrasse 50  
8212 Neuhausen am Rheinfall  
Switzerland  
Phone +41 52 674 0060  
Fax +41 52 674 0066  
[www.werma.com](http://www.werma.com)  
[info@werma.ch](mailto:info@werma.ch)

**WERMA Italia S.r.l.**

Via dell'Artigianato 42  
29122 Piacenza  
Italy  
Phone +39 05 23 04 45 44  
[www.werma.com](http://www.werma.com)  
[info@werma.it](mailto:info@werma.it)

**WERMA SARL**

56, Rue Colière  
69780 Mions  
France  
Phone +33 47222 3737  
[www.werma.com](http://www.werma.com)  
[info@werma.fr](mailto:info@werma.fr)

**WERMA BENELUX**

Poortakkerstraat 41C  
9051 Sint-Denijs-Westrem  
Belgium  
Phone +32 9 220 31 11  
[www.werma.com](http://www.werma.com)  
[info@wermabenelux.com](mailto:info@wermabenelux.com)

**WERMA (UK) Ltd.**

11 Regent Park  
37 Booth Drive  
Park Farm Industrial Estate  
Wellingborough NN8 6GR  
Great Britain  
Phone +44 1536 486930  
Fax +44 1536 514810  
[www.werma.com](http://www.werma.com)  
[uksales@werma.co.uk](mailto:uksales@werma.co.uk)

**WERMA USA Inc.**

1266 Oakbrook Dr, Suite A  
Norcross, GA 30093 USA  
Phone +1 470 361 0600  
[www.werma.com](http://www.werma.com)  
[us-info@werma.com](mailto:us-info@werma.com)

**WERMA (Shanghai) Co., Ltd.**

Building 8, No. 85, Mingnan Road,  
Songjiang, Shanghai, P. R. C  
201613  
China  
Phone +86 21 5774-0022  
Fax +86 21 5774-6601  
[www.werma.com.cn](http://www.werma.com.cn)  
[info@werma.com.cn](mailto:info@werma.com.cn)

